


swepro Industrial Tools
Strong, safe, low-noise



Contents & overview

MEANING OF ICONS

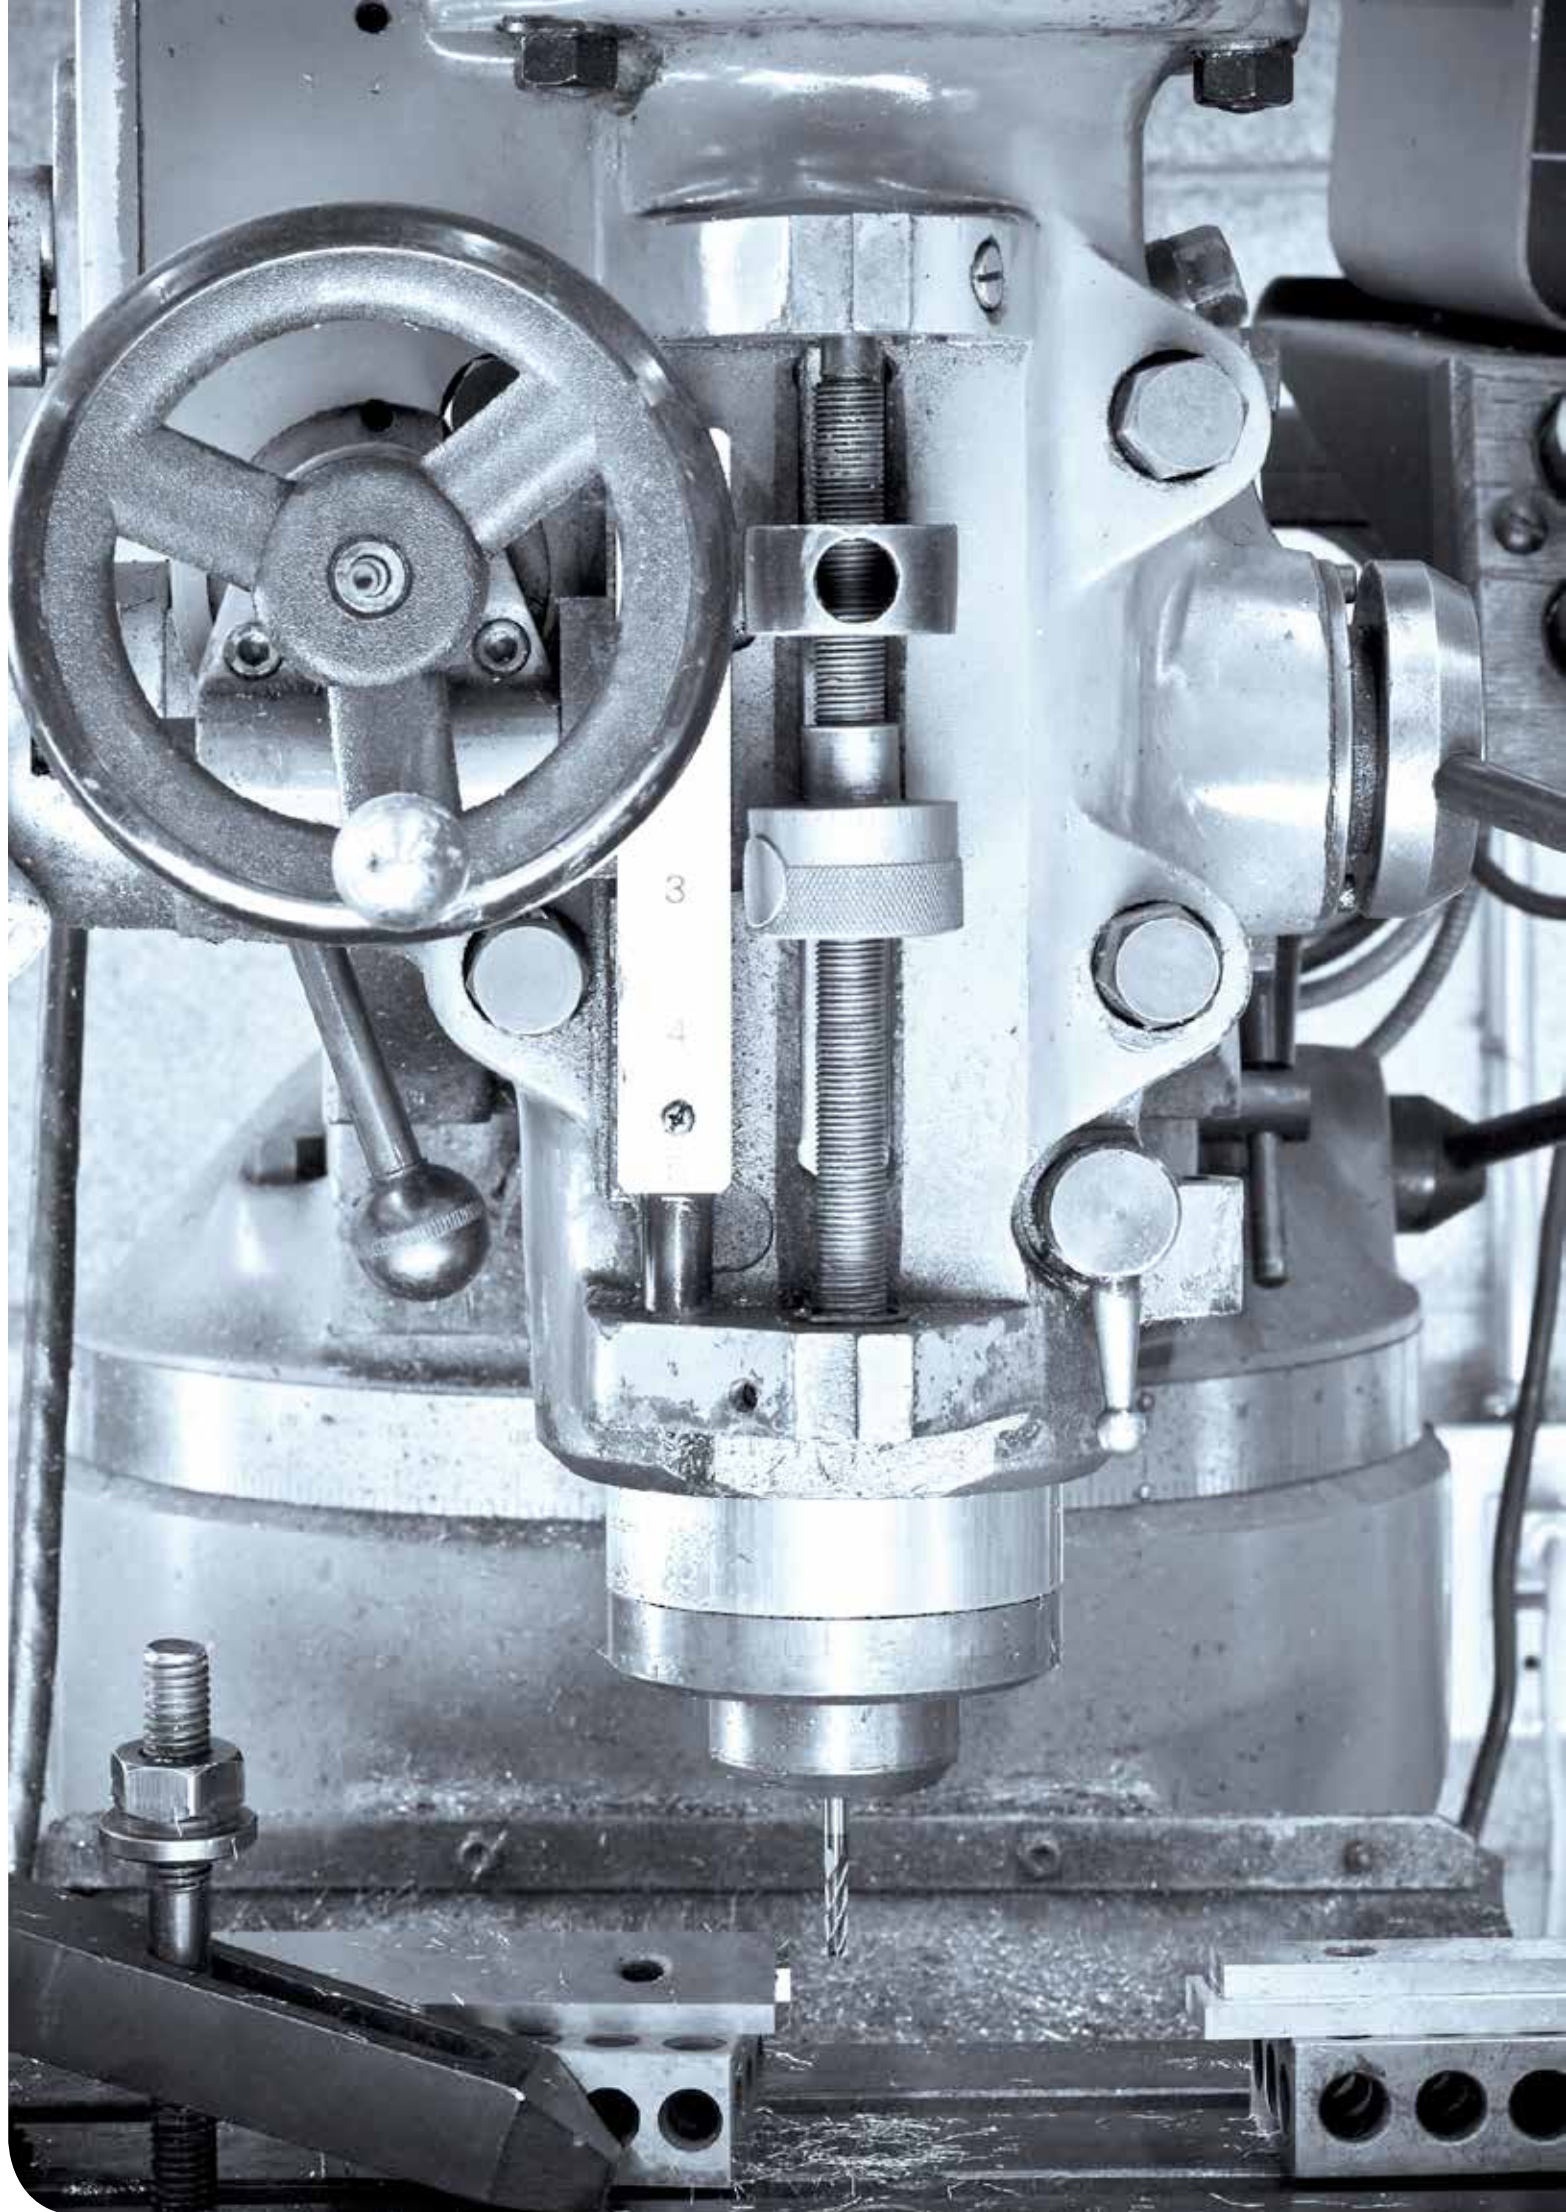

VOLUME
Particularly quiet (< 80 dBA)



ASSEMBLY
Right/Left directions



WEIGHT
Particularly lightweight



SAFETY



COMPOSITE

MATERIAL
Composite



DISCHARGE AIR
Optimised discharge air system



SIZE
Compact

THE COMPANY

■ ABOUT SWEPRO

- 4 Our remit
- 5 Sales territory
- 6 Product applications
- 8 Trialling
- 9 Reference list and benefits

THE PRODUCTS

■ GRINDING TOOLS

- 12 Axial grinders
- 40 Surface grinders
- 63 Pistol-type grinders

■ ASSEMBLY TOOLS

- 68 Pneumatic screwdrivers
- 93 Impact wrenches
- 106 Ratchet wrenches

■ DRILLING TOOLS

- 117 Pistol-type drills
- 130 Straight-type drills
- 133 Angle-type drill

■ PERCUSSIVE TOOLS

- 136 Flux chippers
- 140 Needle scalers

■ FILES & SAWS

- 149 Files
- 152 Saws

■ OTHER TOOLS

- 156 Engraving pen
- 157 Nibbler and nipper
- 159 Plate shear
- 160 Riveting guns

■ ACCESSORIES

FACTS & TECHNICAL DETAILS

- 172 About the products
- 174 Benefits at a glance
- 175 Maintenance
- 176 The "correct" torque
- 178 Technical details

Remit

swepro – With our broad range of compressed air tools and accessories, we cover the most diverse of application areas of our customers. Our passion is providing support and consultation services to our customers in order to find the perfect solutions to specific customer applications. By determining individual customer requirements, products are made available that represent best possible solutions.

The latest generation of tools features pioneering improvements such as noise and vibration reduction, excellent handling of the tools with soft grips, weight reduction using composite housings, lower compressed air consumption, safety locking and automatic cut-out function.

Our goal is to assist you in the effective and environmentally-friendly deployment of compressed air within your company.



Rugged and reliable: swepro products in use

Professional, uncomplicated and flexible

It is becoming more and more important to find and implement quickly tailored solutions in manufacturing and production processes.

LEVERAGE OUR EXPERTISE

We are the specialists and offer you:

- ▶ Professional consultation
- ▶ One-to-one customer support
- ▶ Technical support
- ▶ Comprehensive standard product range
- ▶ Custom designs
(tailored specifically to your applications)
- ▶ Speedy integration into the production process
- ▶ Short lead times
- ▶ Long service lives

Please take advantage of our professional consultancy service in order to take into consideration all safety issues within your company whilst optimising costs at the same time.



Sales territory

EUROPE



Head office
and central warehouse

Swepro

Im Taubental 10 | 41468 Neuss | Germany



Locations



Applications

For many years, swepro has been a specialist supplier of compressed air tools deployed in all sectors of industry and skilled trades. The range of applications is very diversified and extends from assembly & maintenance and metal & woodworking to deployment in synthetic material production.

Assembly work

INDUSTRY, MECHANICAL ENGINEERING

Impact wrenches, ratchet wrenches,
pneumatic screwdrivers, riveting guns



Metalworking and processing

FOUNDRIES, CNC, PRESSROOMS,
MECHANICAL WORKING,
MOULD CONSTRUCTION

Cut-off angle grinders, drills, flux chippers,
needle scalars, files, saws



Maintenance and repair

SHIPBUILDING, VEHICLE WORKSHOPS,
INDUSTRY

Impact wrenches, ratchet wrenches, pneumatic
screwdrivers, grinders, drills, flux chippers,
needle scalers, files and saws



Woodworking and pro- cessing

FURNITURE AND KITCHEN CONSTRUCTION,
WINDOW MANUFACTURERS, WOODEN PROFILES

Belt sanders, delta sanders, random orbital sanders,
orbital sanders, files, saws, drills



Plastics processing and treatment

FILM MANUFACTURERS, DIE CASTING,
SURFACE COATING

Sanders, pneumatic screwdrivers, drills, files, saws



Trialling

You can test virtually all of our products within your company environment for 14 days with no obligation. You have no administrative overhead at all for a test. If the product does not meet your requirements, we will be pleased to propose suitable alternatives if you require. Products not required are collected by us at no cost to you.



LEVERAGE OUR CONSULTATION SERVICE

swepro offers you custom solutions extending beyond the comprehensive standard product range. Make use of our expertise and advice service offered by specialists and engineers for your specific tasks.

Have any questions or need advice?

 **+44 (0) 121 393 3500**



Your benefits

SERVICE

Our sales team has the technical expertise and consultancy know-how to ascertain your individual needs and to develop solutions. Our trialling system enables you to test compressed air tools free of charge and without obligation.

AVAILABILITY

Our optimised warehouse and logistics structure means it is possible for us to deliver standard products Europe-wide within 1 – 3 workdays. This means there are no long waiting times and we can address your requirement at short notice.

INDUSTRIAL QUALITY

The tool range is specially tailored to the requirements in industry and manufacturing.

EXPERIENCE

swepro occurs since years successfully in all industries as a competent partner for many renowned companies. Our customer base includes industrial customers as well as a number of mid-sized companies. Our broad product portfolio offers our customers a whole array of solutions in the most diverse of application areas.

REFERENCES

Audi AG
 Bayer AG
 Coca-Cola
 Continental
 Daimler AG
 Deutsche Bahn AG
 Evonik Industries AG
 Heraeus
 Johnson Controls
 Krones AG
 MAN
 Saint-Gobain
 Siemens AG
 Thyssen Krupp
 ZF

The grinding tools in the swepro product portfolio are split into axial, pistol-type and surface grinders. The requirements of the user must be borne in mind when choosing the "right" grinder. The specialist consultancy service from our sales staff guarantees optimal product selection.





01 Grinding tools

▶ Axial grinders

- 13 Micro grinders
- 18 Air die grinders
- 26 Angle grinders
- 30 Extended air die grinders

▶ Surface grinders

- 41 Orbital sanders
- 44 Random orbital sanders
- 52 Belt sanders
- 56 Delta sanders
- 59 Cut-off angle grinders

▶ Pistol-type grinders

AXIAL GRINDERS

MICRO GRINDER:

A micro grinder boasts compactness and ease of use. Micro grinders can be deployed very efficiently - particularly in areas that are difficult to access. Micro grinders can be used for example for milling, grinding and deburring in tool and mould making, as well as in metalworking shops.

AIR DIE GRINDER:

Air die grinders are practical and extremely robust axial grinders that are perfectly suited to milling, polishing and deburring work thanks to their quiet mode of operation.

ANGLE GRINDER:

Practical, angle die grinders work with very low levels of vibration and lend themselves perfectly to continual operation in many fields of industry, such as foundries and the automotive sectors, for grinding, polishing, sanding and deburring.

EXTENDED AIR DIE GRINDER:

The powerful and extremely robust extended air die grinders have excellent accessibility to awkward places thanks to the extended shaft. An extended axial grinder is used for the surface machining of steel and cast iron, deburring work, and for the cleaning of weld seams. Due to its metallic casing, it is deployed in many areas of industry and is used in foundries, and tool and machine construction.

SELECTION AID

MODELS	MICRO GRINDER AIR DIE GRINDER ANGLE GRINDER EXTENDED AIR DIE GRINDER	Practical grinder for delicate work Compact grinder for robust working Grinder for working in poorly accessible places Grinder for working at depth
COLLET	3 mm, 6 mm, 8 mm	
ACTIVATION	Rotation, lever, slider	
DISCHARGE AIR	Front, rear, side	
EXTRAS	Insulation, right-left operation, noise minimisation, high-performance grinder, torque setting	

SW 3371M


Micro grinder

(3 mm collet with insulation)

Item number: **783376**

PRODUCT DESCRIPTION:

swepro SW 3371M - The insulated micro grinder lends itself to continual use, even when working in confined spaces, and can be deployed for many grinding applications. Its practical and short design means this high-speed device is particularly suited to grinding, milling and deburring in tool and mould making, as well as in metalworking shops. The device can be used easily via a practical rotating mechanism and has an air duct in the noise-reducing hose.

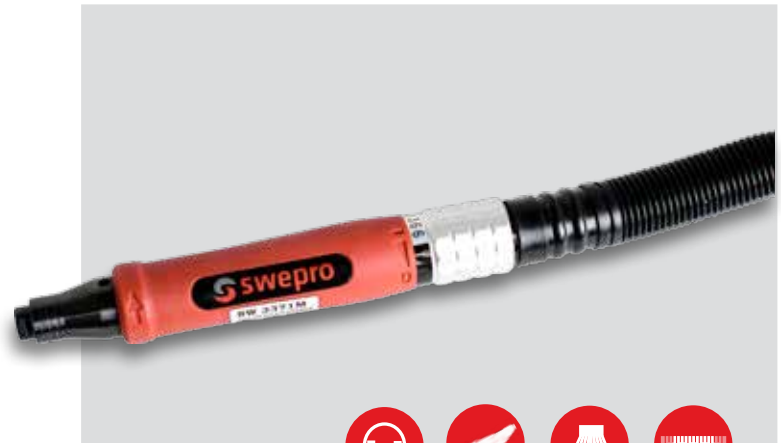

<80 dBA



BENEFITS / SPECIAL FEATURES:

- ▶ Use in confined spaces
- ▶ Compact design
- ▶ Air duct in noise-reduced hose
- ▶ Insulation

TECHNICAL DETAILS:

SPEED	60000 1/min
DIMENSIONS	L: 132 mm
WEIGHT	0.245 kg
AIR CONSUMPTION	0.057 m ³ /min
COLLET	3 mm
NOISE LEVEL	79 dB(A)
VIBRATION	0,5 m/s ²
ROTATION DIRECTION	Right
ACTIVATION	Control dial
CONNECTOR	1/4" BSPT

Alternative:

SW 3370

Micro grinder, designed for continual use

Item no.

783370

14



Accessory:

SW 3340

Mini oiler
Aluminium design

Item no.

782500

164



SW 3370

Micro grinder

(3 mm collet)

Item number: **783370**



Alternative:

SW 316

Micro grinder

Item no.
784600



swepro SW 316 - The micro grinder lends itself to continual use, even when working in confined spaces, and can be deployed for many grinding work applications.

BENEFITS / SPECIAL FEATURES:

- ▶ Use in confined spaces
- ▶ Compact design
- ▶ Rotation mechanism

TECHNICAL DETAILS:

SPEED	56000 1/min
DIMENSIONS	L: 150 mm
WEIGHT	0.21 kg
AIR CONSUMPTION	0.160 m ³ /min
COLLET	3 mm

PRODUCT DESCRIPTION:

swepro SW 3370 - The micro grinder lends itself to continual use, even when working in confined spaces, and can be deployed for many grinding work applications. Its practical and short design means this high-speed device is particularly suited to grinding, milling and deburring in tool and mould making, as well as in metalworking shops. The device can be used easily via a practical turning mechanism and has an air duct in the noise-reducing hose.

BENEFITS / SPECIAL FEATURES:

- ▶ Use in confined spaces
- ▶ Compact design
- ▶ Air duct in noise-reduced hose
- ▶ Suitable for continual industrial deployment
- ▶ Rotation mechanism

TECHNICAL DETAILS:

SPEED	56000 1/min
DIMENSIONS	L: 132 mm
WEIGHT	0.245 kg
AIR CONSUMPTION	0.06 m ³ /min
COLLET	3 mm
NOISE LEVEL	74 dB(A)
VIBRATION	0.6 m/s ²
ROTATION DIRECTION	Right
ACTIVATION	Control dial
CONNECTOR	1/4" BSPT

SW 135

Micro grinder

(3 + 6 mm collets)

Item number: **784100**

PRODUCT DESCRIPTION:

swepro SW 135 - The micro grinder is a practical, compact and hence extremely robust micro grinder. Its quiet mode of operation means it is ideally suited to grinding, polishing, sanding and deburring. The SW 135 is started with rotation activation. The rearward air duct protects against turbulence at the workplace. The grinder can be used with 3 mm and 6 mm collets.

BENEFITS / SPECIAL FEATURES:

- ▶ Extract air hose
- ▶ Exchangeable 3 + 6 mm collets
- ▶ High performance

TECHNICAL DETAILS:

SPEED	35000 1/min
DIMENSIONS	L: 175 mm
WEIGHT	0.35 kg
AIR CONSUMPTION	0.170 m ³ /min
COLLET	3 + 6 mm
ACTIVATION	Control dial
CONNECTOR	1/4" BSPT
NOISE LEVEL	74 dB(A)
VIBRATION	0.6 m/s ²



Alternative:

SW 10G

Micro grinder
Higher speed

Item no.
783380



Accessory:

3 mm collet
For pneumatic grinder SW 135
Item no.: **784110**

6 mm collet
For pneumatic grinder SW 135
Item no.: **784120**

Feed/discharge air hose
For pneumatic grinder SW 135
Item no.: **784130**

SW 3391M

Micro angle grinder

(90° / 21000 1/min)

Item number : **783765**



PRODUCT DESCRIPTION:

swepro SW 3391M - The small and compact 90° angle die grinder is ideal for filigrane and precise grinding and deburring suitable. The grinder can be operated with either a 3mm collet or a 6 mm threaded receptacle. It comes with a respective grinding disc (Ø 30 mm) and a grindstone (Ø 30 mm) with 6mm threaded receptacle. SW 3391M has so no turbulence of dust or chips in the application field, caused by the rear exhaust and exhaust hose.

Alternative:

SW 3392M

Micro angle grinder

Item no.
783766

swepro SW 3392M - The small and compact 120° angle die grinder is ideal for filigrane and precise grinding and deburring suitable.

BENEFITS / SPECIAL FEATURES:

- ▶ 120°
- ▶ Rear exhaust and exhaust hose
- ▶ Incl. grinding disc and grindstone

TECHNICAL DETAILS:

SPEED	21000 1/min
DIMENSION	L: 160 mm
WEIGHT	0.23 kg
AIR CONSUMPTION	0.170 m ³ /min
COLLET	3 mm



BENEFITS / SPECIAL FEATURES:

- ▶ 90°
- ▶ Rear exhaust and exhaust hose
- ▶ Incl. grinding disc and grindstone
- ▶ Isolation

TECHNICAL DETAILS:

SPEED	21000 1/min
DIMENSION	L: 160 mm
WEIGHT	0.20 kg
AIR CONSUMPTION	0.170 m ³ /min
NOISE LEVEL	80 dB(A)
VIBRATION	2.0 m/s ²
ACTIVATION	Rotation activation
CONNECTOR	1/4" BSPT
MAX. OPERATING PRESSURE	6.3 bar

SW 3393M

Micro angle grinder

(3 mm collet / insulation)

Item number: **783743**

PRODUCT DESCRIPTION:

swepro SW 3393M – The small and practical micro angle grinder is ideal for delicate and precision grinding and deburring work – also at places of work with awkward access. The high-speed motor (72000 1/min) is started with the practical rotation activator and is ideal for continual deployment. The handle insulation ensures reliable and safe operation of the grinder. The SW 3393M has a rearwards discharge air duct so that there is no dust or chipping turbulence at the workplace. Despite the high speed of 72000 1/ min, the SW 3393M only has a noise level of 72 dB(A).



BENEFITS / SPECIAL FEATURES:


- ▶ Insulation
- ▶ Low-noise
- ▶ Rotation activation
- ▶ High speed

TECHNICAL DETAILS:

SPEED	72000 1/min
DIMENSION LxHxØ	157 x 43 x 19 mm
WEIGHT	0.23 kg
AIR CONSUMPTION	0.150 m ³ /min
COLLET	3 mm
NOISE LEVEL	72 dB(A)
VIBRATION	2.0 m/s ²
ROTATION DIRECTION	Right
ACTIVATION	Rotation activation
CONNECTOR	1/4" BSPT

Alternative:

SW 7494M
Angle grinder
Lever activation

Item no. **783780**  36



Accessory:

SW 3340
Mini oiler
Aluminium design

Item no. **782500**  164



SW 20L

Air die grinder

(6 mm collet / lever release / discharge air at rear)

Item number: **783390**



PRODUCT DESCRIPTION:

swepro SW 20L - The air die grinder is a practical, compact and hence extremely robust axial grinder. Speeds of up to 40000 1/min mean the SW 20L is very powerful. Thanks to its quiet mode of operation, it is ideal for grinding, polishing, sanding and deburring. The device has lever activation for ease of use and continual deployment. The rearward air duct means discharge air is kept away from the work-place. The grinder can be used with 6 mm collets.

BENEFITS / SPECIAL FEATURES:


- ▶ Extract air at rear
- ▶ High performance


TECHNICAL DETAILS:

SPEED	40000 1/min
DIMENSIONS	L: 165 mm
WEIGHT	0.38 kg
COLLET	6 mm
NOISE LEVEL	85 dB(A)
VIBRATION	2.5 m/s ²
RATING	0.2 HP
ACTIVATION	Lever
CONNECTOR	1/8" BSPT

Accessory:

SW 2445
2-part maintenance unit

Item no.
782600  164



SW 7733SAM

Air die grinder

(6 mm collet/ low speed 3600 1/min)

Artikelnummer: **783742**

PRODUCT DESCRIPTION:

swepro SW 7733SAM - The low speed Air Die Grinder with its 6 mm collet and a speed of up to 3600 1/min is a versatile tool. The applications of the grinder are e.g. grinding, polishing and brushing, as well as the processing of welds and deburring of thin and sensitive materials. Product advantages of SW 7733SAM are the safety locks of the lever release, the rotating rear exhaust and the insulated soft grip for safe operations.

BENEFITS / SPECIAL FEATURES:

- ▶ Lever release
- ▶ Turnable connection
- ▶ Insulated soft grip

TECHNICAL DETAILS:

SPEED	3600 1/min
DIMENSION	L: 220 mm
WEIGHT	0.60 kg
AIR CONSUMPTION	0.099 m ³ /min
NOISE LEVEL	81 dB(A)
VIBRATION	1.2 m/s ²
ACTIVATION	Lever
COLLET	6 mm



Alternative:

SW 135

Micro grinder
Exchangeable 3 + 6 mm collets

Item no.
784100

15



SW 25SM6

Air die grinder

(6 mm collet / low-noise)

Item number: **783325**



< 80 dBA



COMPOSITE



PRODUCT DESCRIPTION:

swepro SW 25SM6 - With a maximum speed of 25000 1/min, this compact and practical device works with very low levels of vibration and is therefore suitable for all grinding, sanding and deburring work. This low-noise air die grinder has Right/Left operation and a patented safety slider with automatic shut-off. The grinder can optionally be used with 3 mm collets.

Accessory:

3 mm collet

For air die grinder
SW 25SM6

Item no.
800008

BENEFITS / SPECIAL FEATURES:

- ▶ Low-noise
- ▶ Sliding switch
- ▶ R/L operation
- ▶ Automatic shut-off

TECHNICAL DETAILS:

SPEED	25000 1/min
DIMENSION	L: 170 mm
WEIGHT	0.55 kg
AIR CONSUMPTION	0.280 m ³ /min
COLLET	6 mm
NOISE LEVEL	72 dB(A)
VIBRATION	2.3 m/s ²
ROTATION DIRECTION	Right-Left
ACTIVATION	Slider control
CONNECTOR	1/4" BSPT

SW 25SM3

Air die grinder

Item number: **783326**

PRODUCT DESCRIPTION:

swepro SW 25SM3 - This handy and compact low-vibration tool is suited for all sanding, polishing and de-burring tasks. Apart from clockwise/anticlockwise rotation, this noise-dampened axial grinder also has patented safety slide control with auto shut-off.

BENEFITS / SPECIAL FEATURES:

- ▶ Low-noise
- ▶ Sliding switch

Accessory:

6 mm collet
For air die grinder
SW 25SM3

Item no.
800007



< 80 dBA



COMPOSITE



TECHNICAL DETAILS:

SPEED 25000 1/min

DIMENSION L: 170 mm

WEIGHT 0.55 kg

AIR CONSUMPTION 0.280 m³/min

COLLET 3 mm

NOISE LEVEL 72 dB(A)

VIBRATION 2.3 m/s²

ROTATION DIRECTION Right-Left

ACTIVATION Slider control

CONNECTOR 1/4" BSPT

SW 25SM8

Air die grinder

Item number: **783327**

PRODUCT DESCRIPTION:


swepro SW 25SM8 - This handy and compact low-vibration tool is suited for all sanding, polishing and de-burring tasks. Apart from clockwise/anticlockwise rotation, this noise-dampened axial grinder also has patented safety slide control with auto shut-off.

BENEFITS / SPECIAL FEATURES:

- ▶ Low-noise
- ▶ Sliding switch

Accessory:

Conflex
1/4" BSPT

Item no.
786214 



< 80 dBA



COMPOSITE



TECHNICAL DETAILS:

SPEED 25000 1/min

DIMENSION L: 170 mm

WEIGHT 0.55 kg

AIR CONSUMPTION 0.280 m³/min

COLLET 8 mm

NOISE LEVEL 72 dB(A)

VIBRATION 2.3 m/s²

ROTATION DIRECTION Right-Left

ACTIVATION Slider control

CONNECTOR 1/4" BSPT

SW M3005M

Air die grinder

(6 mm collet / lever release / 4-level setting)

Item number: **783353**



COMPOSITE



Alternative:

SW 7495M

Air die grinder
0.7 HP

Item no.
783781

37



Accessory:

SW 2445

2-part maintenance unit

Item no.
782600

164



PRODUCT DESCRIPTION:

swepro SW M3005M - The level setting of this practical, compact and plastic-jacketed air die grinder is ideal for grinding and deburring of different materials. The grinder has a safety switch to prevent unintentional switch-on, and keeps the discharge air away from the workplace and body thanks to its rotatable extract air duct on the side.

BENEFITS / SPECIAL FEATURES:

- ▶ 4-level setting
- ▶ Insulation
- ▶ Adjustable discharge air duct
- ▶ Safety switch

TECHNICAL DETAILS:

SPEED 25000 1/min

DIMENSIONS L: 170 mm

WEIGHT 0.45 kg

AIR CONSUMPTION 0.105 m³/min

ACTIVATION Lever

COLLET 6 mm

CONNECTOR 1/4" BSPT

NOISE LEVEL 92 dB(A)

VIBRATION 4.1 m/s²

SW 7732FM

Air die grinder

(6 mm collet / lever release / front exhaust)

Item number: **783733**

PRODUCT DESCRIPTION:

swepro SW 7732 FM - This practical, compact and hence extremely robust air die grinder is perfect for all grinding, polishing, sanding and deburring work thanks to its quiet mode of operation. The grinder has a safety switch to protect against unintentional switch-on. The grinder can optionally be used with 3 mm collets.

BENEFITS / SPECIAL FEATURES:

- ▶ Very small and compact
- ▶ Lever release
- ▶ Discharge air at front
- ▶ Insulation

TECHNICAL DETAILS:

SPEED	25000 1/min
DIMENSION	L: 120 mm
WEIGHT	0.30 kg
AIR CONSUMPTION	0.085 m ³ /min
COLLET	6 mm
DISCHARGE AIR	At front
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	82 dB(A)
VIBRATION	1.3 m/s ²



Alternative:

SW 7732

Air die grinder
Discharge air at rear

Item no.
783732

35



Accessory:

SW 3340

Mini oiler
Aluminium design

Item no.
782500

164



3 mm collet

Item no.
783026



SW 7764-P

High-performance air die grinder

(6 mm collet / 0.7 HP power rating / safety switch / exhaust hose)

Item number: **783717**

PRODUCT DESCRIPTION:

swepro SW 7764-P - This practical, compact and extremely robust axial grinder is perfect for grinding, polishing, sanding and deburring thanks to its quiet mode of operation. The device has a safety switch to prevent unintentional switch-on, and keeps the discharge air away from the workplace thanks to its rearwards extract air duct. The grinder can optionally be used with 8 mm collets.

BENEFITS / SPECIAL FEATURES:

- ▶ Insulation
- ▶ Power rating: 0.7 HP
- ▶ Safety switch
- ▶ Exhaust hose

TECHNICAL DETAILS:

SPEED	22000 1/min
DIMENSION	L: 205 mm
WEIGHT	0.92 kg
AIR CONSUMPTION	0.110 m ³ /min
COLLET	6 mm
POWER RATING	0.7 HP
ROTATION DIRECTION	Right
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	89 dB(A)
VIBRATION	2.5 m/s ²



Alternative:

SW 25SM6

Air die grinder
Automatic shut-off
Composite casing

Item no.
783325

20



Accessory:

SW 2445

2-part maintenance unit

Item no.: **782600**

164

8 mm collet

Item no.: **800012**

SW 7734FM

Angle grinder

(6 mm collet / lever release / front exhaust)

Item number: **783739**



PRODUCT DESCRIPTION:

swepro SW 7734 FM - This practical, compact and hence extremely robust angle grinder is perfect for grinding, polishing, sanding and deburring thanks to its quiet mode of operation. The grinder has a safety switch to protect against unintentional switch-on. Discharge air is extracted out to the front.

BENEFITS / SPECIAL FEATURES:

- ▶ Small and compact
- ▶ Insulation
- ▶ Discharge air at front
- ▶ Low-vibration

Alternative:

SW 7494M

Angle grinder
Extract air at rear
Lever activation

Item no.
783780

36



TECHNICAL DETAILS:

SPEED	18000 1/min
DIMENSION	L: 124 mm
WEIGHT	0.40 kg
AIR CONSUMPTION	0.085 m ³ /min
COLLET	6 mm
NOISE LEVEL	82 dB(A)
VIBRATION	0.9 m/s ²
DISCHARGE AIR	At front
ACTIVATION	Lever
CONNECTOR	1/4" BSPT

Accessory:

SW 3340

Mini oiler
Aluminium design

Item no.
782500

164



SW 7734

Angle grinder

(6 mm collet / lever release)

Item number: **783734**

PRODUCT DESCRIPTION:

swepro SW 7734 - This practical, compact and hence extremely robust axial grinder is perfect for grinding, polishing, sanding and deburring thanks to its quiet mode of operation. The grinder has a safety switch to prevent unintentional switch-on, and keeps the discharge air away from the work-place thanks to its rearwards extract air duct.

BENEFITS / SPECIAL FEATURES:

- ▶ Small and compact
- ▶ Safety switch

TECHNICAL DETAILS:

SPEED	20000 1/min
DIMENSION	L: 146 mm
WEIGHT	0.49 kg
AIR CONSUMPTION	0.090 m ³ /min
COLLET	6 mm
ROTATION DIRECTION	Right
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	82 dB(A)
VIBRATION	0.9 m/s ²



Alternative:

SW M3050M

Angle grinder
Discharge air
adjustable

Item no.
783356

29



Accessory:

SW 3340

Mini oiler
Aluminium design

Item no.
782500

164



SW 7765-P

High-performance angle grinder

(6 mm collet / lever release / insulation)

Item number: **783716**



PRODUCT DESCRIPTION:

swepro SW 7765-P - This practical, angular high-performance grinder with 6 mm collet adapter is a low-vibration device and is perfectly suited to continual deployment in many fields of industry, such as foundries and the automotive sector. The device has a safety switch to prevent unintentional switch-on and a rearwards discharge air duct with noise-reducing extract air hose. The cold-absorbing plastic insulation means the device offers a high level of user comfort – even when used without work gloves.

BENEFITS / SPECIAL FEATURES:

- ▶ Insulation
- ▶ Continual industrial deployment
- ▶ 500 Watt power rating
- ▶ Exhaust hose
- ▶ Safety switch

TECHNICAL DETAILS:

SPEED	19000 1/min
DIMENSIONS	L: 165 mm
WEIGHT	0.55 kg
AIR CONSUMPTION	0.050 m ³ /min
COLLET	6 mm
NOISE LEVEL	89 dB(A)
VIBRATION	2.5 m/s ²
ROTATION DIRECTION	Right
ACTIVATION	Lever
CONNECTOR	1/4" BSPT

Alternative:

SW 7764-P

Air die grinder
Straight design

Item no.
783717

25



Accessory:

SW 2445

Maintenance unit
2-part

Item no.
782600

164



SW M3050M

Angle grinder

(6 mm collet / lever release / 4-level setting)

Item number: **783356**

PRODUCT DESCRIPTION:

swepro SW M3050M - This practical, compact and plastic-jacketed angle grinder is ideal for grinding and deburring of different materials thanks to its level setting. The device has a safety switch to prevent unintentional switch-on, and keeps the discharge air away from the workplace and body thanks to its rotatable extract air duct on the side.

BENEFITS / SPECIAL FEATURES:

- ▶ Insulation
- ▶ Discharge air adjustable
- ▶ Small and compact
- ▶ 4-level setting

TECHNICAL DETAILS:

SPEED	20000 1/min
DIMENSION	L: 176 mm
WEIGHT	0.60 kg
AIR CONSUMPTION	0.085 m ³ /min
VOLUME	96 dB(A)
VIBRATION	2.1 m/s ²
COLLET	6 mm
ACTIVATION	Lever
CONNECTOR	1/4" BSPT



COMPOSITE

Alternative:

SW 7734

Angle axial grinder
Cost-effective alternative

Item no.

783734



Accessory:

SW 3340

Mini oiler
Aluminium design

Item no.

782500





SW 38LE

Extended air die grinder

(6 mm collet / lever release)

Item number: **783731**

PRODUCT DESCRIPTION:

swepro SW 38LE - The extended shaft of this powerful and extremely robust long-necked axial grinder ensures excellent reachability to awkward places and means it is suitable for the surface machining of steel and cast iron. Due to its metallic casing, it is deployed in many areas of industry and is used in foundries and tool & machine construction. The device has lever activation for easy continual use and the rearwards discharge duct (via a hose unit) keeps the discharge air away from the workplace.

BENEFITS / SPECIAL FEATURES:

- ▶ Extended shaft
- ▶ Robust
- ▶ Extract air hose
- ▶ Lever activation

TECHNICAL DETAILS:

SPEED	20000 1/min
DIMENSION	L: 290 mm
WEIGHT	0.80 kg
AIR CONSUMPTION	0.300 m ³ /min
COLLET	6 mm
NOISE LEVEL	88 dB(A)
VIBRATION	4.6 m/s ²
ROTATION DIRECTION	Right
ACTIVATION	Lever
CONNECTOR	1/8" BSPT



Alternative:

Item no.
783730

SW 38GE

Extended air die grinder

swepro SW 38GE - This powerful and extremely robust extended air die grinder ensures easy accessibility of hard to reach areas.

BENEFITS / SPECIAL FEATURES:

- ▶ Extended shaft
- ▶ Robust
- ▶ Extract air hose
- ▶ Lever activation

TECHNICAL DETAILS:

SPEED	20000 1/min
DIMENSIONS	L: 295 mm
WEIGHT	0.80 kg
AIR CONSUMPTION	0.300 m ³ /min
COLLET	6 mm



SW 3053M

Extended air die grinder

(6 mm collet / 4-level setting / Lever activation)

Item number: **783350**



COMPOSITE



PRODUCT DESCRIPTION:

swepro SW 3053M - The extended shaft of this particularly lightweight extended axial grinder ensures excellent accessibility to awkward places and means it is perfectly suited to the surface machining of steel and cast iron. The device has 4-level control, a safety switch for protection against unintentional switch-on and a variable discharge air outlet.

BENEFITS / SPECIAL FEATURES:

- ▶ Extended shaft
- ▶ 4-level setting: 9,600 to 23,000 1/min
- ▶ Variable discharge air duct

Alternative:

SW 38LE

Extended axial grinder
Lever activation

Item no.
783731



TECHNICAL DETAILS:


SPEED	23000 1/min
DIMENSIONS	L: 300 mm
WEIGHT	0.73 kg
AIR CONSUMPTION	0.085 m ³ /min
COLLET	6 mm
NOISE LEVEL	90 dB(A)
ROTATION DIRECTION	Right
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
VIBRATION	3.1 m/s ²

Accessory:

SW 2445

Maintenance unit
2-part

Item no.
782600



SW 7433M

High-performance air die grinder

(6 mm collet / lever release / 1 HP)

Item number: **783360**

PRODUCT DESCRIPTION:

swepro SW 7433M - The extended shaft of this particularly powerful extended axial grinder ensures excellent reachability to awkward places and means it is suited perfectly to the surface machining of steel and cast iron, deburring work and the cleaning of weld seams. The device has a power rating up to 1 HP and has a safety lever to protect against unintentional switch-on. Discharge air leaves the shaft of the grinder out to the side.

BENEFITS / SPECIAL FEATURES:

- ▶ Powerful: 1 HP
- ▶ Discharge outlet on side
- ▶ Safety lever

TECHNICAL DETAILS:

SPEED	14600 1/min
DIMENSION	L: 394 mm
WEIGHT	1.73 kg
AIR CONSUMPTION	0.136 m ³ /min
COLLET	6 mm
RATING	1 HP
ACTIVATION	Lever
CONNECTOR	3/8" BSPT
NOISE LEVEL	89 dB(A)
VIBRATION	4.1 m/s ²



Alternative:

NEW!

Item no.
783450

SW 7438M

Extended Air Angle Grinder



swepro SW 7438M - This extremely powerful extended air die grinder ensures through its extended shank and angled head for easy access to hard to reach areas.

BENEFITS / SPECIAL FEATURES:

- ▶ High performance
- ▶ Extended shaft
- ▶ Safety lever

TECHNICAL DETAILS:

SPEED	13000 1/min
DIMENSION	L: 390 mm
WEIGHT	1.70 kg
AIR CONSUMPTION	0.540 m ³ /min

SW 7496LM

Extended air grinder

(6 mm collet / lever-start type / 1 HP)

Item number: **783750**



NEW!



COMPOSITE



PRODUCT DESCRIPTION:

swepro SW 7496LM - This powerful straight air die grinder ensures through its 12" extended shank for easy access to hard to reach areas and is ideal for the surface treatment of steel and castings, deburring and for cleaning welds. The tool has up to 1 HP and a safety lever to prevent accidental operation.

BENEFITS / SPECIAL FEATURES:

- ▶ High performance
- ▶ Extended shaft
- ▶ Safety switch
- ▶ Turnable connection

TECHNICAL DETAILS:

SPEED	22100 1/min
DIMENSIONS	L: 455 mm
WEIGHT	1.30 kg
AIR CONSUMPTION	0.380 m ³ /min
COLLET	6 mm
PERFORMANCE	1 HP
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
SYSTEM PRESSURE	6.3 bar
NOISE LEVEL	80 dB(A)
VIBRATION	2.1 m/s ²

NEW!

Alternative:

SW 7495LM

Air die grinder
Lever activation

Item no.
783781

38




Accessory:

SW 2445

Maintenance unit
2-part

Item no.
782600

164



SW 7732

Compact air die grinder

(6 mm collet / lever release / rear exhaust)

Item number: **783732**

PRODUCT DESCRIPTION:

swepro SW 7732 - This practical, compact and hence extremely robust axial grinder is perfect for grinding, polishing, sanding and deburring thanks to its quiet mode of operation. The SW 7732 has a safety switch to prevent unintentional switch-on, and keeps the discharge air away from the workplace thanks to its rearwards extract air duct. The grinder can optionally be used with 3 mm collets.

BENEFITS / SPECIAL FEATURES:

- ▶ Very small and compact
- ▶ Exchangeable collets

TECHNICAL DETAILS:


SPEED	25000 1/min
DIMENSION	L: 120 mm
WEIGHT	0.30 kg
AIR CONSUMPTION	0.090 m ³ /min
COLLET	6 mm
POWER RATING	0.3 HP
ACTIVATION	Lever
ROTATION DIRECTION	Right
CONNECTOR	1/4" BSPT
NOISE LEVEL	82 dB(A)
VIBRATION	1.3 m/s ²



Alternative:

SW 7732FM

Air die grinder
Discharge air at front


Item no.
783733 



Accessory:

SW 3340

Mini oiler
Aluminium design

Item no.
782500 

3 mm collet

Item no.
783026



SW 7494M

Angle grinder

(6 mm collet / lever-start type / 0.75 HP)

Item number: **783780**



COMPOSITE



PRODUCT DESCRIPTION:

swepro SW 7494M - The powerful angle grinder with its 6 mm collet and a speed of up to 18000 1/min is a versatile tool. The applications of the grinder are e.g. grinding, polishing and brushing, as well as the processing of welds and deburring of thin and sensitive materials. You are able to set the free speed of the grinder by an adjustable rotation dial at the top of the shaft. Product advantages of SW 7494M are the safety locks of the lever release, the rotating rear exhaust and the insulated soft grip for safe operations.

BENEFITS / SPECIAL FEATURES:

- ▶ High performance
- ▶ Lever release
- ▶ Insulated soft grip


TECHNICAL DETAILS:

SPEED	18000 1/min
DIMENSIONS	L: 175 mm
WEIGHT	0.80 kg
AIR CONSUMPTION	0.380 m ³ /min
COLLET	6 mm
NOISE LEVEL	82 dB(A)
PERFORMANCE	0,75 HP
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
VIBRATION	1.7 m/s ²

Alternative:

SW 7765-P

High-performance angle grinder
Low weight

Item no. **783716**  28



Accessory:

SW 2445

Maintenance unit
2-part

Item no. **782600**  164



SW 7495M

Air die grinder

(6 mm collet / lever-start type / 0.75 HP)

Item number: **783781**

PRODUCT DESCRIPTION:

swepro SW 7495M - The powerful air grinder with its 6 mm collet and a speed of up to 24000 1/min is a versatile tool. The applications of the grinder are e.g. grinding, polishing and brushing, as well as the processing of welds and deburring of thin and sensitive materials. You are able to set the free speed of the grinder by an adjustable rotation dial at the top of the shaft. Product advantages of SW 7495M are the safety locks of the lever release, the rotating rear exhaust and the insulated soft grip for safe operations.



COMPOSITE

TECHNICAL DETAILS:

SPEED	24000 1/min
DIMENSION	L: 175 mm
WEIGHT	0.65 kg
AIR CONSUMPTION	0.380 m ³ /min
COLLET	6 mm
NOISE LEVEL	82 dB(A)
PERFORMANCE	0.75 HP
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
VIBRATION	1.9 m/s ²

BENEFITS / SPECIAL FEATURES

- ▶ Isolation
- ▶ Performance: up to 0,75 HP
- ▶ Safety switch

Alternative:

SW 7764-P

High-performance air die grinder
Safety lever

Item no.
783717



Accessory:

SW 2445

2 - part maintenance unit

Item no.: **782600**



6 mm Collet

Item no.: **800012**

SW 7495LM

Air die grinder

(6 mm collet / lever-start type / 1 HP)

Item number: **783746**



PRODUCT DISCRIPTION:

swepro SW 7495LM - This powerful straight air die grinder ensures through its 3.5" extended shank for easy access to hard to reach areas and is ideal for the surface treatment of steel and castings, deburring and for cleaning welds. The tool has up to 1 HP and a safety lever to prevent accidental operation.

BENEFITS / SPECIAL FEATURES:

- ▶ Extended shaft
- ▶ Performance: up to 1 HP
- ▶ Lever release

TECHNICAL DETAILS:

SPEED	22800 1/min
DIMENSION	L: 240 mm
WEIGHT	0.77 kg
AIR CONSUMPTION	0.380 m ³ /min
COLLET	6 mm
NOISE LEVEL	80 dB(A)
ACTIVATION	Lever
VIBRATION	1.65 m/s ²
CONNECTOR	1/4" BSPT
VIBRATION	1.9 m/s ²

Alternative:

SW 3053M

Extended air die grinder
4-level setting

Item no.
783350

32



Accessory:

SW 2445

2 - part maintenance unit

Item no.
782600

164





SURFACE GRINDERS

ORBITAL SANDERS:

RECTANGULAR SANDING PLATE – IDEAL FOR DEPLOYMENT IN THE FURNITURE INDUSTRY, VEHICLE WORKSHOPS AND JOINERIES

The swepro orbital sanders boast high performance with excellent ease of use thanks to their lightweight composite housing. The orbital sanders have non-slip and vibration-damping hand grips and extract air routing to the rear.

The practical and compact devices are used mainly in the furniture industry, the car sector and in joineries.

RANDOM ORBITAL SANDERS:

ROTATING SANDING PLATE – IDEAL FOR DEPLOYMENT IN PAINTWORK PREPARATION, REPAIRS AND INDUSTRIAL PRODUCTION

The lightweight composite housing and the velcro sanding pad of the universally deployable, low-noise swepro random orbital sander make it extremely easy to use. Its non-slip and vibration-damping handle, and ergonomic design, guarantee speedy and controlled working with excellent surface quality. The random orbital sanders are ideal for use in paintwork preparation, repairs and in industrial production.

DELTA SANDERS:

V-SHAPED SANDING PAD – IDEAL FOR DEPLOYMENT IN PAINTWORK PREPARATION, REPAIRS AND INDUSTRIAL PRODUCTION

swepro delta sanders boast excellent ease of use. Their non-slip and vibration-damping handles, and ergonomic design, guarantee speedy and controlled working with excellent surface quality. With velcro sanding pad, the devices are ideal for deployment in paintwork preparation, repairs and industrial production.

BELT SANDERS:

RUNNING SANDING BELTS – UNIVERSALLY DEPLOYABLE FOR SMOOTHING WELD SEAMS, REMOVING PAINT AND RUST AND DIVERSE DEBURRING WORK, ALSO IN AWKWARD PLACES THAT ARE DIFFICULT TO ACCESS

The different lengths of swivel-mounted sanding arms make the practical swepro belt grinders universally deployable – also in awkward places that are difficult to access, such as for smoothing weld seams, removing paint and rust and diverse deburring work.

CUT-OFF ANGLE GRINDERS:

ROTATING CUTTER – IDEAL FOR CUTTING AND SANDING DIFFERENT MATERIALS

The powerful swepro cut-off angle grinder is universally deployable for cutting and grinding plastics, metals and other materials. The handles mounted on the sides ensure better handling and improved control. The devices have a safety lever to protect against unintentional switch-on.

SW 70C

Clip-type orbital sander

(93 x 178 mm)

Item number: **789115**

PRODUCT DESCRIPTION:

swepro SW 70C - This clip-type orbital sander offers high power level, excellent ease of use and a lightweight composite housing. With non-slip, vibration-damping handle, and discharge air routed rearwards, the compact and practical device lends itself particularly well to the furniture industry, the vehicle sector and joineries.

BENEFITS / SPECIAL FEATURES:

- ▶ Convenient and ergonomic one-hand operation
- ▶ Simple swapping of sanding pads with clip fastener
- ▶ Low noise level
- ▶ Robust working

TECHNICAL DETAILS:

SANDING PAD	93 x 178 mm
SPEED	10000 1/min
DIMENSION	L: 178 mm
WEIGHT	0.95 kg
AIR CONSUMPTION	0.430 m ³ /min
ACTIVATION	Lever
NOISE LEVEL	83 dB(A)
VIBRATION	3.4 m/s ²



Alternative:



SW 711

Orbital sander
Sanding pad exchangeable with velcro

Item no.
789111

42

Accessory:

Replacement pad

for clip-type orbital sander SW 70C

Item no.
789116

SW 7111

Orbital sander

(75 x 100 mm)

Item number: **789111**



COMPOSITE

Alternative:

SW 70C

Clip-type orbital sander
Sanding pad is secured
with a clip fastener



Item no.
789115

41

Accessory:

Replacement pad

(75 x 100 mm)
For orbital sander SW 7111

Item no.
789112

PRODUCT DESCRIPTION:

swepro SW 7111 - The orbital sander offers high performance with excellent ease of use and lightweight composite housing. With its non-slip, vibration-damping handle, the velcro sanding pad and discharge air guided rearwards, the compact and practical device lends itself particularly well to the furniture industry, the vehicle sector and joineries.

BENEFITS / SPECIAL FEATURES:

- ▶ Ergonomic and convenient one-handed operation
- ▶ Lightweight
- ▶ Simple swapping of sanding pads with velcro fastener
- ▶ Simple fitting
- ▶ Connector for dust extraction

TECHNICAL DETAILS:

ORBITAL DIAMETER Ø	5 mm
SANDING PAD	75 x 100 mm
SPEED	10000 1/min
DIMENSION	L: 140 mm
WEIGHT	0.70 kg
AIR CONSUMPTION	0.260 m ³ /min
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	80 dB(A)
VIBRATION	0.8 m/s ²

SW 7113

Orbital sander

(100 x 180 mm)

Item number: **789113**

PRODUCT DESCRIPTION:

swepro SW 7113 - The orbital sander offers high performance with excellent ease of use and lightweight composite housing. With its non-slip, vibration-damping handle, the velcro sanding pad and discharge air guided rearwards, the compact and practical device lends itself particularly well to the furniture industry, the vehicle sector and joineries.

BENEFITS / SPECIAL FEATURES:

- ▶ Convenient and ergonomic one-hand operation
- ▶ Lightweight
- ▶ Speedy and simple swapping of sanding pads with velcro fastener
- ▶ Low maintenance overhead
- ▶ Sturdy design
- ▶ Connector for dust extraction

TECHNICAL DETAILS:

ORBITAL DIAMETER Ø	5 mm
SANDING PAD	100 x 180 mm
SPEED	8500 1/min
DIMENSION	L: 150 mm
WEIGHT	1.10 kg
AIR CONSUMPTION	0.260 m ³ /min
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	80 dB(A)
VIBRATION	1.8 m/s ²



COMPOSITE



Alternative:

SW 7114-DC

Delta sander
Orbital diameter 3.2 mm

Item no.

789108

56



Accessory:

Replacement pad

(100 x 180 mm)
For orbital sander SW 7113

Item no.

789114

SW OSC30H

Random orbital sander

(3" / Ø 75 mm)

Item number: **789103**



COMPOSITE

PRODUCT DESCRIPTION:

swepro OSC30H - The universally deployable, low-noise 3" random orbital sander with lightweight composite housing features excellent ease of use. Its non-slip and vibration-damping handle, and ergonomic design, guarantee speedy and controlled working, yielding excellent surface quality. Ideal for use in paintwork preparation, repairs and industrial production, it has a velcro sanding pad and a connector for dust extraction.

BENEFITS / SPECIAL FEATURES:

- ▶ Low weight / low noise level
- ▶ Sanding disc can be replaced quickly and easily with velcro fastener
- ▶ Universally deployable for even and uneven surfaces
- ▶ Vibration-damping handle

TECHNICAL DETAILS:

SPEED	10000 1/min
DIMENSIONS	L: 174.8 mm
SANDING PAD	Ø 75 mm
WEIGHT	0.71 kg
AIR CONSUMPTION	0.453 m ³ /min
RATING	179 W
NOISE LEVEL	81 dB(A)
VIBRATION	4.1 m/s ²

Alternative:

SW M5143

Angle grinder without dust
Grinding Disc 3"
Higher Speed

Item no. **783348** 



NEW!

Accessory:

SW 3340

Mini oiler

Item no.: **782500** 

Quick-release nipple

Connector AG 1/4" BSPT

Item no.: **800200** 

SW 2445

2-part maintenance unit

Item no.: **782600** 

SW OSN30H

Random orbital sander

(3" / Ø 75 mm)

Item number: **789101**

PRODUCT DESCRIPTION:

swepro SW OSN30H - The universally deployable, low-noise 3" random orbital sander with light-weight composite housing and velcro sanding pad features excellent ease of use. Its non-slip and vibration-damping handle, and ergonomic design, guarantee speedy and controlled working, yielding excellent surface quality. Ideal for use in paintwork preparation, repairs and in industrial production.

BENEFITS / SPECIAL FEATURES:

- ▶ Low weight / low noise level
- ▶ Sanding disc can be replaced quickly and easily with velcro fastener
- ▶ Universally deployable for even and uneven surfaces
- ▶ Vibration-damping handle

TECHNICAL DETAILS:

SPEED	10000 1/min
DIMENSION	L: 135.4 mm
SANDING PAD	Ø 75 mm
WEIGHT	0.66 kg
AIR CONSUMPTION	0.453 m ³ /min
RATING	179 W
NOISE LEVEL	81 dB(A)
VIBRATION	3.3 m/s ²
CONNECTOR	1/4" BSPT



Alternative:

SW 7157

Sander / -Polisher Pistol Type
Change between orbital sanding and rotary grinding

Item no.

783345

65



Accessory:

SW 3340

Mini oiler

Item no.: **782500**

164

SW 2445

2-part maintenance unit

Item no.: **782600**

164

Replacement pad

for 3" random orbital sander

Item no.: **800252**

SW 7117-NC5

Random orbital sander

Item number: **789121**

PRODUCT DESCRIPTION:

swepro SW 7117-NC5 - This universally deployable, low-noise 5" random orbital sander with light-weight composite housing and velcro sanding pad features excellent ease of use. Ideal for use in paintwork preparation, repairs and in industrial production.



Accessory:

Replacement pad

For 5" random orbital sander

Item no.: **789122**

BENEFITS / SPECIAL FEATURES:

- ▶ Universally deployable for even and uneven surfaces
- ▶ Ergonomic design

TECHNICAL DETAILS:

SPEED	10000 1/min
SANDING PAD	Ø 125 mm
WEIGHT	0.75 kg
AIR CONSUMPTION	0.300 m ³ /min
NOISE LEVEL	79 dB(A)
VIBRATION	1.5 m/s ²
CONNECTOR	1/4" BSPT


SW 7117-NC6

Random orbital sander

Item number: **789125**

PRODUCT DESCRIPTION:

swepro SW 7117-NC6 - This universally deployable, low-noise 6" random orbital sander with lightweight composite housing and velcro sanding pad features excellent ease of use. Ideal for use in paintwork preparation, repairs and in industrial production.

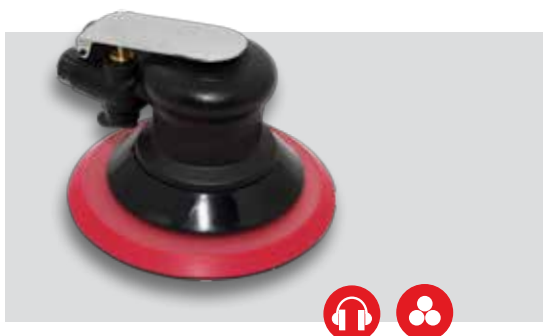

Accessory:

Replacement pad

for 6" random orbital sander

Item no.: **789126**

BENEFITS / SPECIAL FEATURES:

- ▶ Universally deployable for even and uneven surfaces
- ▶ Ergonomic design

TECHNICAL DETAILS:

SPEED	10000 1/min
SANDING PAD	Ø 150 mm
WEIGHT	0.75 kg
AIR CONSUMPTION	0.300 m ³ /min
ORBITAL DIAMETER Ø	5 mm
ACTIVATION	Lever
NOISE LEVEL	79 dB(A)
VIBRATION	1.5 m/s ²
CONNECTOR	1/4" BSPT

SW 7117-DC5

Random orbital sander

Item number: **789123**

PRODUCT DESCRIPTION:

swepro SW 7117-DC5 - This all-purpose and low-noise 5" random orbital sander with its light weight composite enclosure is very convenient to use. The tool has a velcro sanding disc and integrated dust extraction.

BENEFITS / SPECIAL FEATURES:

- ▶ Vibration-damping handle
- ▶ Connector for dust extraction

Accessory:

Replacement pad
for 5" random orbital sander
Item no.: **789124**



TECHNICAL DETAILS:

SPEED	10000 1/min
SANDING PAD	Ø 125 mm
WEIGHT	0.80 kg
AIR CONSUMPTION	0.300 m ³ /min
NOISE LEVEL	79 dB(A)
VIBRATION	1.5 m/s ²
CONNECTOR	1/4" BSPT

SW 7117-DC6

Random orbital sander

Item number: **789127**

PRODUCT DESCRIPTION:


swepro SW 7117-DC6 - This all-purpose and low-noise 6" random orbital sander with its light weight composite enclosure is very convenient to use. The tool has a velcro sanding disc and integrated dust extraction.

BENEFITS / SPECIAL FEATURES:

- ▶ Connector for dust extraction
- ▶ Convenient one-handed operation with ergonomic design

Accessory:

Replacement pad
for 6" random orbital sander
Item no.: **789128**

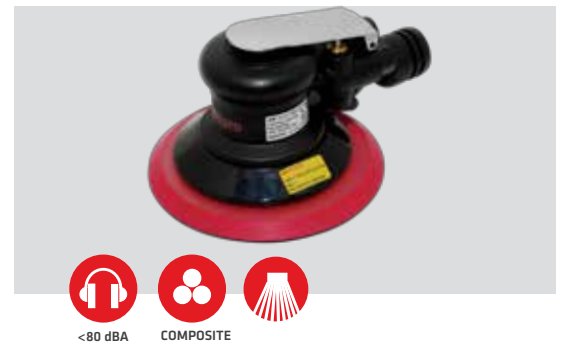

TECHNICAL DETAILS:


SPEED	10000 1/min
SANDING PAD	Ø 150 mm
WEIGHT	0.80 kg
AIR CONSUMPTION	0.300 m ³ /min
NOISE LEVEL	79 dB(A)
VIBRATION	1.5 m/s ²
CONNECTOR	1/4" BSPT

SW OSN-6

Orbital Sander 6"

(6" / Ø 150 mm)

Item number: **789145**

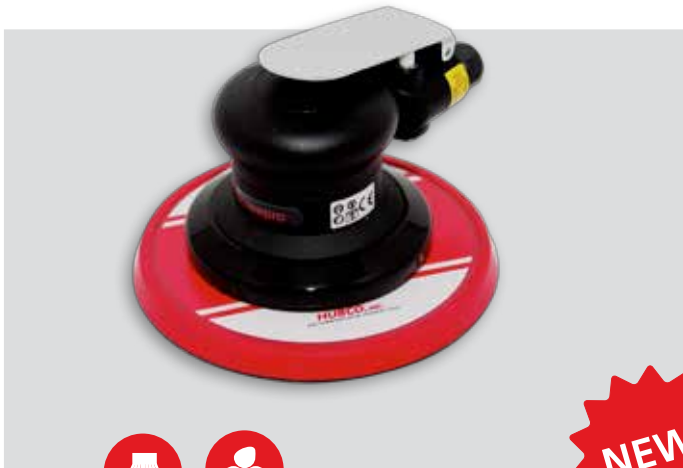

COMPOSITE

NEW!

Alternative:

SW 919NC-6

Random orbital sander
Noise-reduced
More torque

Item no.: **789147**

50

NEW!



Accessory:

Replacement sanding pad 6"

Item no.: **789126**

SW 2445

2 - part maintenance unit

Item no.: **782600**

PRODUCT DESCRIPTION:

swepro SW OSN-6" - This all-purpose and low-noise 6" random orbital sander with its light weight composite enclosure is very convenient to use. Its non-slip and vibration damping handle and ergonomic design guarantees quick and controlled working, yielding a high surface quality. The tool has a velcro sanding disc and is ideally suited in preparation for painting, for repair work or in industrial manufacture.

BENEFITS / SPECIAL FEATURES:

- ▶ Composite enclosure
- ▶ Ergonomic design
- ▶ Low weight
- ▶ Sanding pad exchangeable with velcro

TECHNICAL DETAILS:

SPEED	10000 1/min
MAX. PRESSURE	6.3 bar
DIMENSION	L: 206 mm
WEIGHT	0.80 kg
AIR CONSUMPTION	0.430 m ³ /min
NOISE LEVEL	81 dB(A)
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
VIBRATION	4.1 m/s ²

SW OSC-6

Orbital Sander 6"

(6" / Ø 150 mm /central-vacuum)

Item number: **789146**

PRODUCT DESCRIPTION:

swepro SW OSC-6 - This all-purpose and low-noise 6" random orbital sander with its light weight composite enclosure is very convenient to use. Its non-slip and vibration damping handle and ergonomic design guarantees quick and controlled working, yielding a high surface quality. The tool has a velcro sanding disc and integrated dust extraction and is ideally suited in preparation for painting, for repair work or in industrial manufacture.

BENEFITS / SPECIAL FEATURES:

- ▶ Composite enclosure
- ▶ Ergonomic design
- ▶ Low weight
- ▶ Sanding pad exchangeable with velcro

TECHNICAL DETAILS:

SPEED	10000 1/min
MAX. PEASURE	6.3 bar
DIMENSION	L: 206 mm
WEIGHT	0.80 kg
AIR CONSUMPTION	0.430 m ³ /min
NOISE LEVEL	81 dB(A)
VIBRATION	2.7 m/s ²
CONNECTOR	1/4" BSPT




COMPOSITE

Alternative:

SW 9119DC-6

Random orbital sander
Noise-reduced
With dust extraction

Item no. **789148**  51



Accessory:

Multi hole sanding pad 6"

Item no.: **789104**

SW 3340

Mini oiler

Item no.: **782500**  164

SW 9119NC-6

Random orbital sander

(6" / Ø 150 mm)

Item number: **789147**



COMPOSITE

NEW!

PRODUCT DESCRIPTION:

swepro SW 9119NC-6 - This strong and noise reduced (due to its copper silencer) 6" orbital sander with lightweight composite housing and velcro sanding pad features excellent ease of use. Due to its non slip, vibration absorbing handle and its ergonomic design, it guarantees speedy and controlled working giving excellent surface quality. The integrated cooling system ensures that the bearing and spindle temperature is reduced and as a result we have a longer working period. The SW9119NC-6 is perfect for use in the paintwork preparation, maintenance or industrial production.

BENEFITS / SPECIAL FEATURES:

- ▶ Integrated cooling system for a longer working period
- ▶ Turnable connection
- ▶ Copper silencer for noise reduction

TECHNICAL DETAILS:

SPEED	12000 1/min
DIMENSION	L: 189 mm
WEIGHT	0.83 kg
AIR CONSUMPTION	0.430 m ³ /min
ORBITAL DIAMETER	Ø 5 mm
NOISE LEVEL	76 dB(A)
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
VIBRATION	2.9 m/s ²

Alternative:

SW 7117NC-6

Random orbital sander
Low weight

Item no. **789125**

46



Accessory:

Replacement pad
for random orbital sander

Item no.: **789126**

SW 2445

2 - part maintenance unit

Item no.: **782600**

164

SW 9119DC-6

Random orbital sander

(6" / Ø 150 mm / central-vacuum)

Item number: **789148**

PRODUCT DESCRIPTION:

swepro SW 9119DC-6 - This strong and noise reduced (due to its copper silencer) 6" orbital sander with lightweight composite housing and velcro sanding pad features excellent ease of use. Due to its non slip, vibration absorbing handle and its ergonomic design, it guarantees speedy and controlled working giving excellent surface quality. The integrated cooling system ensures that the bearing and spindle temperature is reduced and as a result we have a longer working period. The SW9119DC-6 is perfect for use in the paintwork preparation, maintenance or industrial production.

BENEFITS / SPECIAL FEATURES:

- ▶ Integrated cooling system for a longer working period
- ▶ Double channel system for stronger suction
- ▶ Turnable connection

TECHNICAL DETAILS:

SPEED	10000 1/min
DIMENSION	L: 260 mm
WEIGHT	0.91 kg
AIR CONSUMPTION	0.430 m ³ /min
NOISE LEVEL	76 dB(A)
ORBITAL DIAMETER	Ø 5 mm
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
VIBRATION	2.0 m/s ²



COMPOSITE



Alternative:

SW 7117DC-6

Random orbital sander
Low weight

Item no.
789127



Accessory:

Multi hole sanding pad 6"

Item no.: **789104**

SW 3340

Mini oiler

Item no.: **782500**



SW C700

Belt sander

(10 x 330 mm)

Item number: **800750**



PRODUCT DESCRIPTION:

swepro SW C700 - The swivel-mounted sanding arm makes this practical belt sander universally deployable for smoothing weld seams, removing paint & rust and for diverse de-burring work, even in awkward places that are difficult to access. The sander has lever activation with safety locking and a clamping system that ensures safe belt guiding and easy belt changes. An adjustable speed controller enables the rotational speed of the belt sander to be set depending on application.

BENEFITS / SPECIAL FEATURES:

- ▶ Speed control
- ▶ Swivel-mounted sanding arm
- ▶ Low weight
- ▶ Ergonomic shape for convenient one-handed operation

TECHNICAL DETAILS:

SPEED	18000 1/min
DIMENSIONS	L: 305 mm
WEIGHT	0.80 kg
AIR CONSUMPTION	0.057 m ³ /min
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	81 dB(A)
VIBRATION	2.5 m/s ²

Alternative:

SW 7709

Belt sander
Swiveling arm
and safety lock

Item no.
789130



Accessory:

SW 3340

Mini oiler
Item no.: **782500**



Conflex

1/4" BSPT
Item no.: **768214**



SW 2445

2-part maintenance unit
Item no.: **782600**



SW C703

Belt sander

(20 x 520 mm)

Item number: **800755**

PRODUCT DESCRIPTION:

swepro SW C703 - The swivel-mounted sanding arm makes this practical belt sander universally deployable for smoothing weld seams, removing paint & rust and for diverse de-burring work, even in awkward places that are difficult to access. The sander has lever activation with safety locking and a clamping system that ensures safe belt guiding and easy belt changes. An adjustable speed controller enables the rotational speed of the belt sander to be set depending on application.

BENEFITS / SPECIAL FEATURES:

- ▶ Speed control
- ▶ Swivel-mounted sanding arm
- ▶ Compact design for difficult to reach surfaces

TECHNICAL DETAILS:

SPEED	18000 1/min
DIMENSIONS	L: 375 mm
WEIGHT	1.20 kg
AIR CONSUMPTION	0.085 m ³ /min
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	84 dB(A)
VIBRATION	2.5 m/s ²




Alternative:

SW 7710

Shorter dimensions

Item no.
789135



Accessory:

SW 3340

Mini oiler

Item no.: **782500**



Conflex

1/4" BSPT

Item no.: **768214**



SW 2445

2-part maintenance unit

Item no.: **782600**



SW 7709

Belt sander

(10x 330 mm)

Item number: **789130**



PRODUCT DESCRIPTION:

swepro 7709 - The swivel-mounted sanding arm makes this practical belt sander universally deployable for smoothing weld seams, removing paint & rust and for diverse de-burring work, even in awkward places that are difficult to access. The sander has lever activation with safety locking and a clamping system that ensures safe belt guiding and easy belt changes.

BENEFITS / SPECIAL FEATURES:

- ▶ Slimline sanding belt specially for working in narrow places
- ▶ Low weight
- ▶ Swivel-mounted sanding arm
- ▶ Sturdy design

TECHNICAL DETAILS:

SPEED	16000 1/min
DIMENSIONS	L: 260 mm
WEIGHT	0.90 kg
AIR CONSUMPTION	0.170 m ³ /min
NOISE LEVEL	83 dB(A)
VIBRATION	2.7 m/s ²
ACTIVATION	Lever
CONNECTOR	1/4" BSPT

Alternative:

SW C700

Belt sander
Swiveling arm
Low weight

Item no. **800750** 



Accessory:



SW 3340

Mini oiler
Item no.: **782500**

 164



SW 2445

2-part maintenance unit
Item no.: **782600**

 164

SW 7710

Belt sander

(20 x 520 mm)

Item number: **789135**

PRODUCT DESCRIPTION:

swepro SW 7710 - The swivel-mounted sanding arm makes this practical belt sander universally deployable for smoothing weld seams, removing paint & rust and for diverse de-burring work, even in awkward places that are difficult to access. The sander has lever activation with safety locking and a clamping system that ensures safe belt guiding and easy belt changes.

BENEFITS / SPECIAL FEATURES:

- ▶ Swivel-mounted sanding arm
- ▶ Ergonomic shape for convenient one-handed operation
- ▶ Sturdy design
- ▶ Speedy and simple swapping of sanding belts without the need for tools

TECHNICAL DETAILS:

SPEED	16000 1/min
DIMENSIONS	L: 340 mm
WEIGHT	1.20 kg
AIR CONSUMPTION	0.170 m ³ /min
NOISE LEVEL	85 dB(A)
VIBRATION	3.2 m/s ²
ACTIVATION	Lever
CONNECTOR	1/4" BSPT




Alternative:

SW C703

Belt sander
Swiveling arm
and safety lock

Item no.
800755 

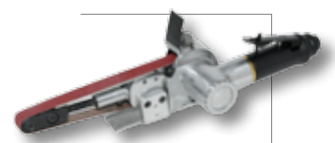

Accessory:



SW 3340
Mini oiler
Item no.: **782500**

 164



SW 2445
2-part maintenance unit
Item no.: **782600**

 164

SW 7114-DC

Delta sander

(orbital diameter 3.2 mm)

Item number: **789108**



COMPOSITE

Alternative:

SW 7111

Orbital sander
Rectangular sanding pad

Item no.
789111

42



PRODUCT DESCRIPTION:

swepro SW 7114-DC - This universally deployable, low-noise delta sander with lightweight composite housing features excellent ease of use. Its non-slip and vibration-damping handle, and ergonomic design, guarantee speedy and controlled working, yielding excellent surface quality. Ideal for use in paintwork preparation, repairs and industrial production, the device has a velcro sanding pad and a connector for dust extraction.

BENEFITS / SPECIAL FEATURES:

- ▶ Connector for dust extraction
- ▶ Sandpaper also reaches into corners
- ▶ Ergonomic sander for convenient one-handed operation
- ▶ Very light weight

TECHNICAL DETAILS:

SPEED	10000 1/min
DIMENSIONS	L: 220 mm
WEIGHT	0.70 kg
AIR CONSUMPTION	0.255 m ³ /min
SANDING PAD	70 x 100 mm
ORBITAL DIAMETER Ø	3.2 mm
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	76 dB(A)
VIBRATION	2.8 m/s ²

Accessory:

SW 3340

Mini oiler

Item no.: **782500**

164

Quick-release nipple

Connector AG 1/4" BSPT

Item no.: **800200**

165

Replacement pad

for delta sander

Item no.: **789109**

SW 7114-NC

Delta sander

(orbital diameter 3.2 mm)

Item number: **789118**

PRODUCT DESCRIPTION:

swepro SW 7114-NC - This universally deployable, low-noise delta sander with lightweight composite housing features excellent ease of use. Its non-slip and vibration-damping handle, and ergonomic design, guarantee speedy and controlled working, yielding excellent surface quality. The velcro sanding pad means the device is ideal for deployment in paintwork preparation, repairs and industrial production.

BENEFITS / SPECIAL FEATURES:

- ▶ Sandpaper also reaches into corners and inner edges
- ▶ Ergonomic sander for convenient one-handed operation
- ▶ Very light weight
- ▶ Velcro sanding pad easily replaceable

TECHNICAL DETAILS:

SPEED	10000 1/min
DIMENSIONS	L: 220 mm
WEIGHT	0.70 kg
AIR CONSUMPTION	0.255 m ³ /min
SANDING PAD	70 x 100 mm
ORBITAL DIAMETER Ø	3.2 mm
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	76 dB(A)
VIBRATION	2.8 m/s ²



COMPOSITE



Alternative:

SW 7113

Orbital sander
Shorter dimensions

Item no.
789113



Accessory:

SW 3340

Mini oiler

Item no.: **782500**



Quick-release nipple

Connector AG 1/4" BSPT

Item no.: **800200**



Replacement pad

for delta sander

Item no.: **789119**

SW M5143

Mini-angle grinder

(3" / 76 mm)

Item number: **783348**



COMPOSITE

NEW!

PRODUCT DESCRIPTION:

swepro SW M5143 - This practical and compact Mini-angle grinder is perfect for grinding, polishing thanks to its quiet mode of operation despite the maximum speed of 22000 1/min. The device has a stageless control, a safety switch for protection against unintentional switch-on and a 360° variable discharge air outlet. By a lubricating nipple which is mounted on the angled head of the grinder, a fast lubrication of the grinder can take place.

BENEFITS / SPECIAL FEATURES:

- ▶ Powerful
- ▶ Attachment bracket
- ▶ Composite

Alternative:

SW 7157

Sander / -Polisher Pistol Type

Change between orbital sanding and rotary grinding

Item no.

783345



NEW!

Accessory:

Replacement dish wheel 2"

Item no.: **801550**

Replacement dish wheel 3"

Item no.: **801992**

TECHNICAL DETAILS:

SPEED 22000 1/min

DIMENSION L: 158 mm

WEIGHT 0.54 kg

AIR CONSUMPTION 0.380 m³/min

SANDING PAD 3"

NOISE LEVEL 89 dB(A)

ACTIVATION Lever

VIBRATION 1.65 m/s²

MAX. PRESSURE 6.3 bar

CONNECTOR 1/4" BSPT

SW 7853R

Angle grinder

(5" / 125 mm / 1.3 HP / M14 x 2 thread)

Item number: **783770**

PRODUCT DESCRIPTION::

swepro SW 7853R - This small and weight-light angle grinder is very powerful. The tool can be used universal for cutting, grinding and roughing of plastics, metals and other materials. The side-mounted handle makes for a better handling and control. It is possible to mount the handle on both sides. Therefore, the tool is suitable for the right and left hand operation. The tool has a safety lever to prevent accidental operation and a spindle lock for quick changing of discs.

BENEFITS / SPECIAL FEATURES:

- ▶ Low weight
- ▶ Left and right handed suitable
- ▶ Safety switch
- ▶ High performance

TECHNICAL DETAILS

SPEED	11000 1/min
DIMENSION	L: 232 mm
WEIGHT	1.60 kg
AIR CONSUMPTION	0.540 m ³ /min
NOISE LEVEL	85 dB(A)
VIBRATION	3.1 m/s ²
ACTIVATION	Lever
CONNECTOR	1/4" BSPT



Alternative:

SW 7845L

Cut-off angle grinder

Item no
783760



Accessory:

Disc

Item no.: **801464**

SW 2445

2-part maintenance unit

Item no.: **782600**



SW 3340

Mini oiler

Item no.: **782500**



SW 7845L

Cut-off angle grinder

(5" / 125 mm / M14 x 2 thread / 1 HP)

Item number: **783760**



COMPOSITE

PRODUCT DESCRIPTION:

swepro SW 7845L - This small and very powerful cut-off angle grinder is universally deployable for the cutting, grinding and roughing of plastics, metals and other materials. The handle mounted on the side ensures better handling and improved control. The device has a safety lever to protect against unintentional switch-on.

BENEFITS / SPECIAL FEATURES:

- ▶ Powerful: 1 HP
- ▶ Safety lever
- ▶ Handle mounted on the side for excellent handling

TECHNICAL DETAILS:

SPEED	13500 1/min
DIMENSIONS	L: 265 mm
WEIGHT	2.38 kg
AIR CONSUMPTION	0.540 m ³ /min
GRINDING DISC	5"
ACTIVATION	Lever
CONNECTOR	3/8" BSPT
NOISE LEVEL	91 dB(A)
VIBRATION	3.3 m/s ²

Alternative:

SW 7877L

Cut-off angle grinder
Grinding disc 7", Low speed

Item no.
783775



Accessory:

Conflex
3/8" BSPT

Item no.: **768213**



SW 2445

2-part maintenance unit

Item no.: **782600**



SW 7745L

Cut-off angle grinder

(5" / 125 mm / M14 x 2 thread)

Item number: **783740**

PRODUCT DESCRIPTION:

swepro SW 7745L - This small, powerful cut-off angle grinder is universally deployable for the cutting and roughing of plastics, metals and other materials. The handle mounted on the side ensures better handling and improved control. The device has a safety lever to protect against unintentional switch-on.

BENEFITS / SPECIAL FEATURES:

- ▶ Additional handle on the side for improved ease of use
- ▶ Low maintenance overhead

TECHNICAL DETAILS:

SPEED	11000 1/min
DIMENSIONS	L: 208 mm
WEIGHT	2.20 kg
AIR CONSUMPTION	0.540 m ³ /min
GRINDING DISC	5"
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	90 dB(A)
VIBRATION	6.8 m/s ²



Alternative:

SW7853R

Cut-off angle grinder
Powerful
Universally deployable

Item no.
783770

59



NEW!

Accessory:

SW 3340

Mini oiler

Item no.: **782500**

164

Conflex

1/4" BSPT

Item no.: **768214**

166

SW 2445

2-part maintenance unit

Item no.: **782600**

164

SW 7877L

Cut-off angle grinder

(7" / 180 mm / M14 x 2 thread / 2.5 HP)

Item number: **783775**



COMPOSITE

PRODUCT DESCRIPTION:

swepro SW 7877L - This small and very powerful cut-off angle grinder is universally deployable for the cutting, grinding and roughing of plastics, metals and other materials. The handle mounted on the side ensures better handling and improved control. The device has a safety lever to protect against unintentional switch-on.

BENEFITS / SPECIAL FEATURES:

- ▶ Composite
- ▶ Safety lever
- ▶ Handle mounted on the side for excellent handling

Accessory:

Conflex

3/8" BSPT

Item no.: **768213**

166

SW 3330

3/8" Mini oiler

Item no.: **782530**

164

TECHNICAL DETAILS:

SPEED	7000 1/min
DIMENSION	L: 340 mm
WEIGHT	3.30 kg
AIR CONSUMPTION	0.820 m ³ /min
NOISE LEVEL	84 dB(A)
GRINDING DISC	7"
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
VIBRATION	2.5 m/s ²

PISTOL-TYPE SANDERS

A pistol-type sander boasts compactness and ease of use. The ergonomic handle enables quiet and safe working of surfaces. Polishing, sanding and deburring work can be carried out with precision thanks to low levels of vibration.

SW 25SM-6P

Pistol-type grinder

(6 mm collet / noise-reduced)

Item number: **783335**



< 80 dBA



COMPOSITE



PRODUCT DESCRIPTION:

swepro SW 25SM-6P - With a maximum speed of 25000 1/min, this compact and practical pistol-type sander works with a very low level of vibration and is therefore suitable for all polishing, sanding and deburring work. This noise-reduced sander has right and left-hand operation and can optionally be used with a 3 mm collet.

BENEFITS / SPECIAL FEATURES:

- ▶ Noise-reduced
- ▶ R/L directions

Alternative:

SW 25SM-3P

Pistol-type sander
3 mm collet

Item no.
783336



182



TECHNICAL DETAILS:

SPEED	25000 1/min
DIMENSION	L: 180 mm
WEIGHT	0.69 kg
AIR CONSUMPTION	0.280 m ³ /min
COLLET	6 mm
ROTATION DIRECTION	Right-Left
NOISE LEVEL	70 dB(A)
VIBRATION	2.3 m/s ²
ACTIVATION	Button
CONNECTOR	1/4" BSPT

Accessory:

SW 2445

2-part maintenance unit

Item no.
782600

3 mm collet

Item no.
800008



SW C221

Mini - Sander / -Polisher

Item number. **783337**

PRODUCT DESCRIPTION:

swepro SW C221 - This all-purpose and low-noise 3" Mini-Sander/Polisher with its light weight composite housing and velcro sanding disc is very convenient to use. Ideally used in preparation for painting, for repair work or in industrial manufacture.

BENEFITS / SPECIAL FEATURES:

- ▶ Composite
- ▶ Non-slip damping handle & Ergonomic design

Accessory:

Sanding pad 3"

Item no.
783339



TECHNICAL DETAILS:

SPEED	2600 1/min
DIMENSION	L: 155 mm
WEIGHT	0.54 kg
AIR CONSUMPTION	0.090 m ³ /min
NOISE LEVEL	80 dB(A)
SANDING PAD	3"
VIBRATION	1.13 m/s ²
MAX. PRESSURE	6,3 bar
ACTIVATION	Button
CONNECTOR	1/4" BSPT

SW 7157

Sander / -Polisher Pistol Type

Item number. **783345**

PRODUCT DESCRIPTION:

swepro SW 7157 - This low-noise 3" Mini-Sander/Polisher with its light weight composite housing has a speed change. In grinding mode it is possible to change between orbital sanding and rotary grinding by patented sliding mechanism.

BENEFITS / SPECIAL FEATURES:

- ▶ Composite
- ▶ Change between orbital sanding and rotary grinding

Accessory:

SW 2445
2-part
maintenance unit

Item no.
782600


SW 3340
Mini oiler

Item no. **782500** 



TECHNICAL DETAILS

SPEED	6000 1/min
DIMENSION	L: 175 mm
WEIGHT	0.74 kg
AIR CONSUMPTION	0.450 m ³ /min
SANDING PAD	3"
VIBRATION	6.6 m/s ²
MAX. PRESSURE	6.3 bar
ACTIVATION	Button
CONNECTOR	1/4" BSPT

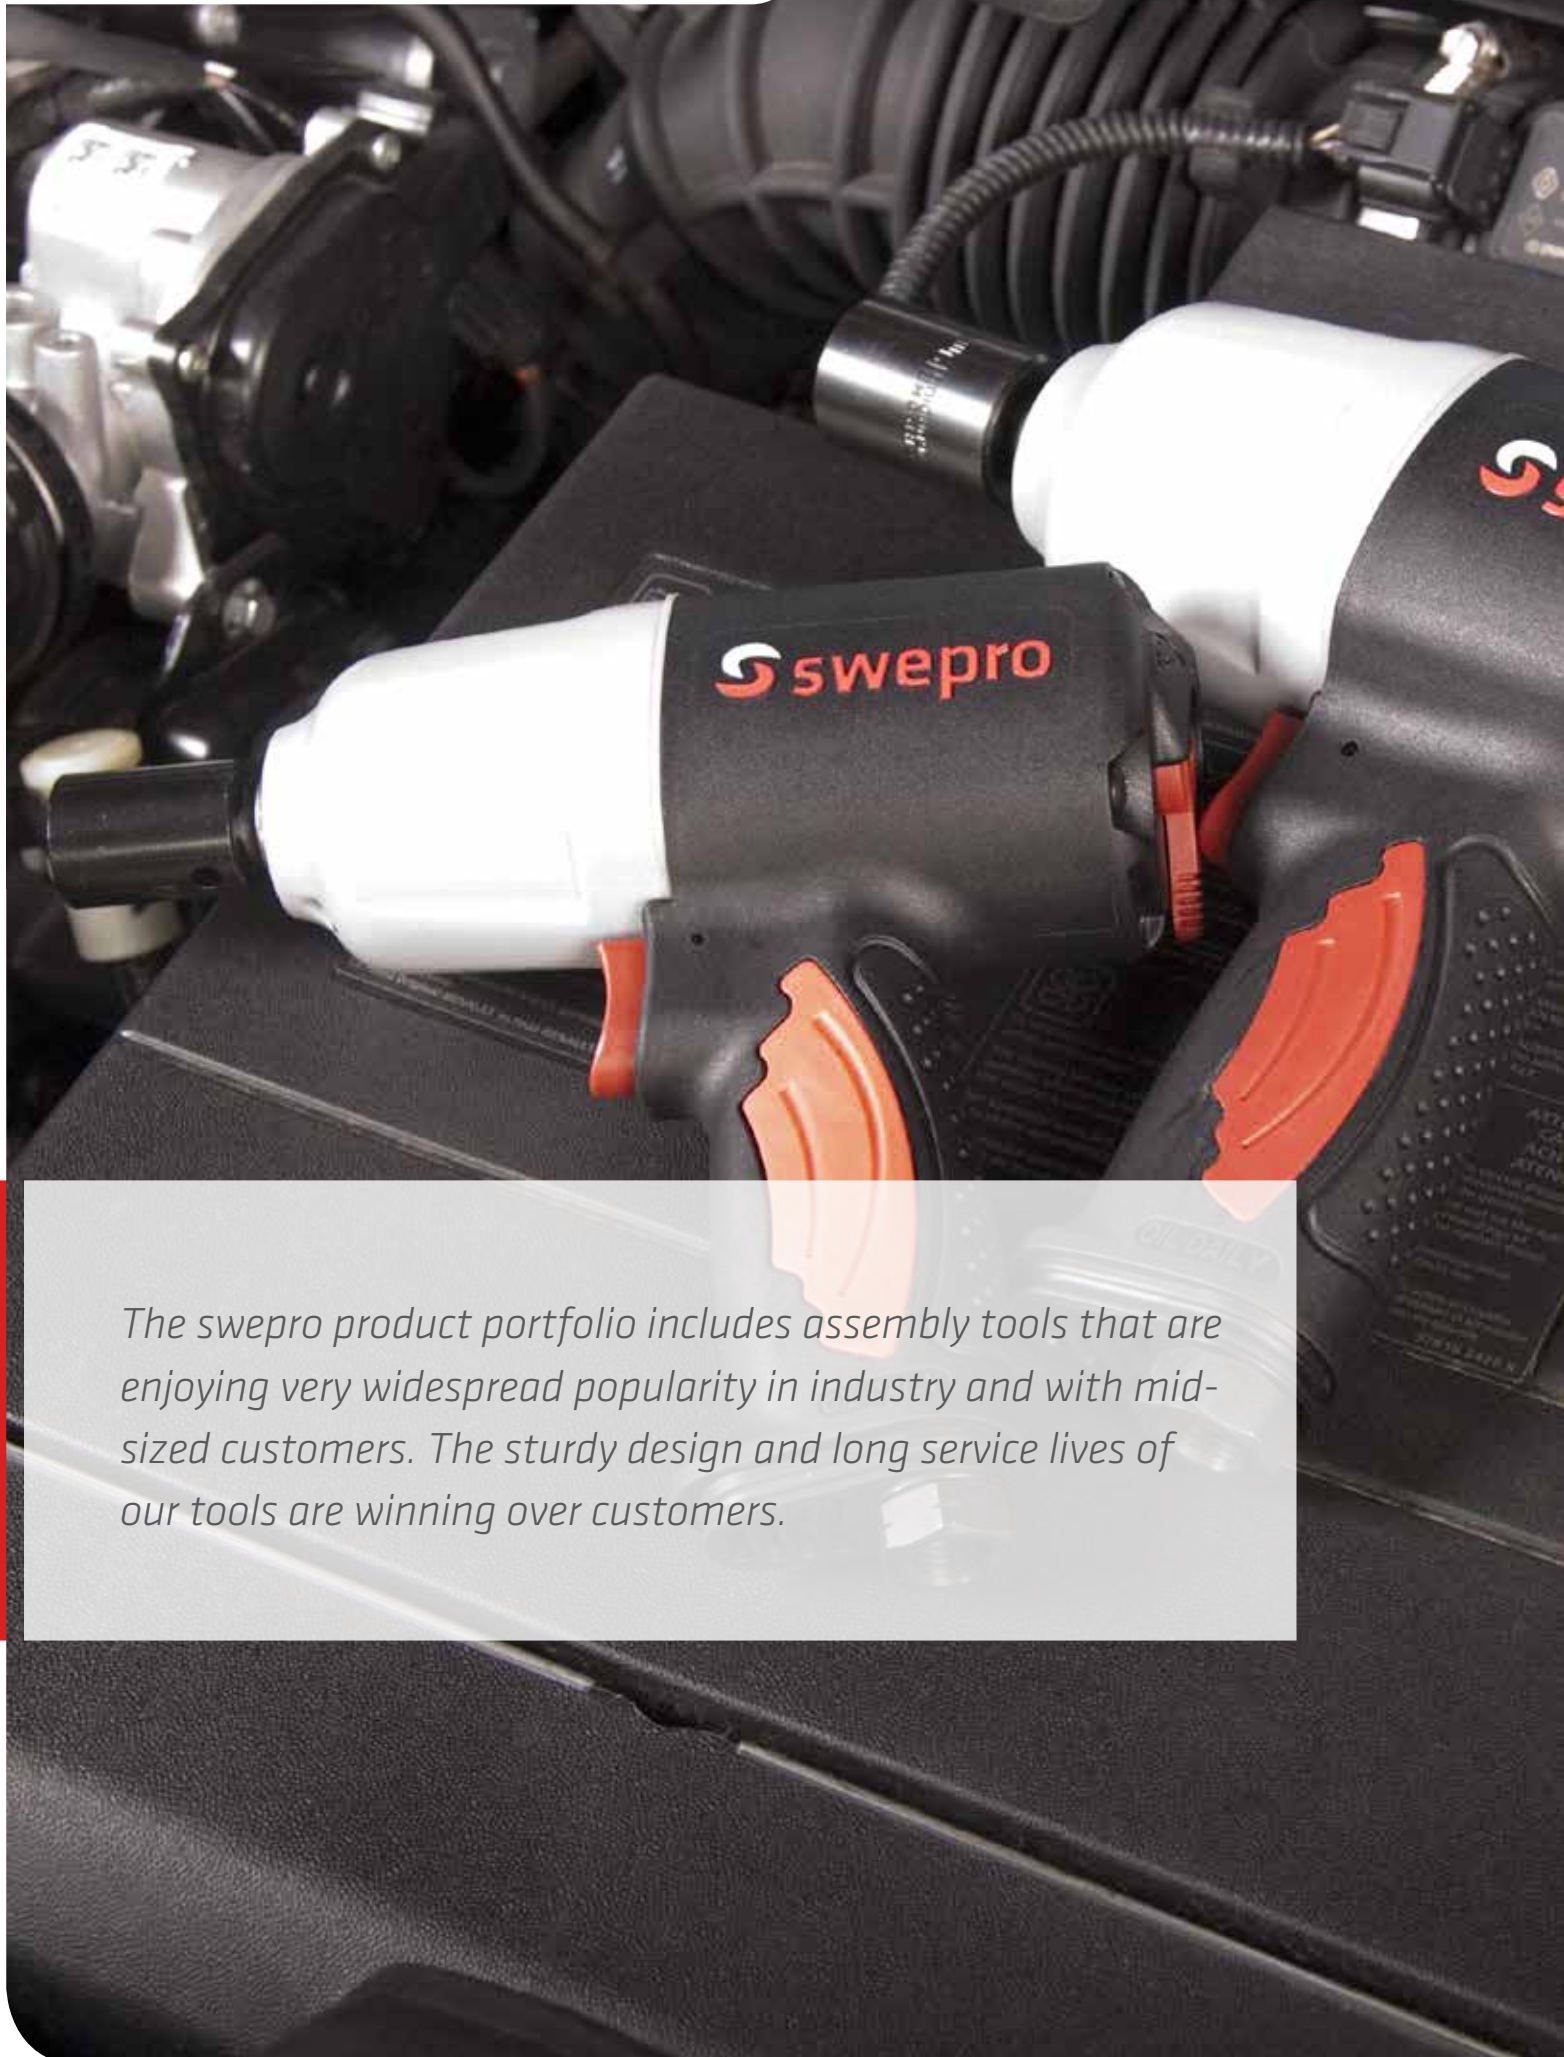

The swepro product portfolio includes assembly tools that are enjoying very widespread popularity in industry and with mid-sized customers. The sturdy design and long service lives of our tools are winning over customers.



02

Assembly tools

▶ Pneumatic screwdrivers

- 69 Straight-type screwdrivers
- 79 Angle-type screwdrivers
- 84 Pistol-type screwdrivers
- 90 Classics

▶ Impact wrenches

- 94 3/8" - 11/2" square drive

▶ Ratchet wrenches

- 106 1/4" - 1/2" square drive

PNEUMATIC SCREWDRIVERS

STRAIGHT-TYPE SCREWDRIVERS:

Straight-type screwdrivers have a patented, low-noise motor with very economical air consumption. Easy to use and with automatic push or manual lever activation, the straight screwdrivers enable reliable assembly within different torque ranges.


ANGLE-TYPE SCREWDRIVERS:

Angle-type screwdrivers enable bolting/screwing when space is at a premium. Our ergonomic angle-type screwdrivers

with patented, low-noise motors have very economical air consumption. Thanks to the practical lever activation and automatic shut-off function, the device enables reliable assembly with model-dependent torque ranges.

PISTOL-TYPE SCREWDRIVERS:

Pistol-type screwdrivers have a patented, low-noise motor with economical air consumption. With automatic push activation and safety clutch, they are simple to use and enable reliable assembly.

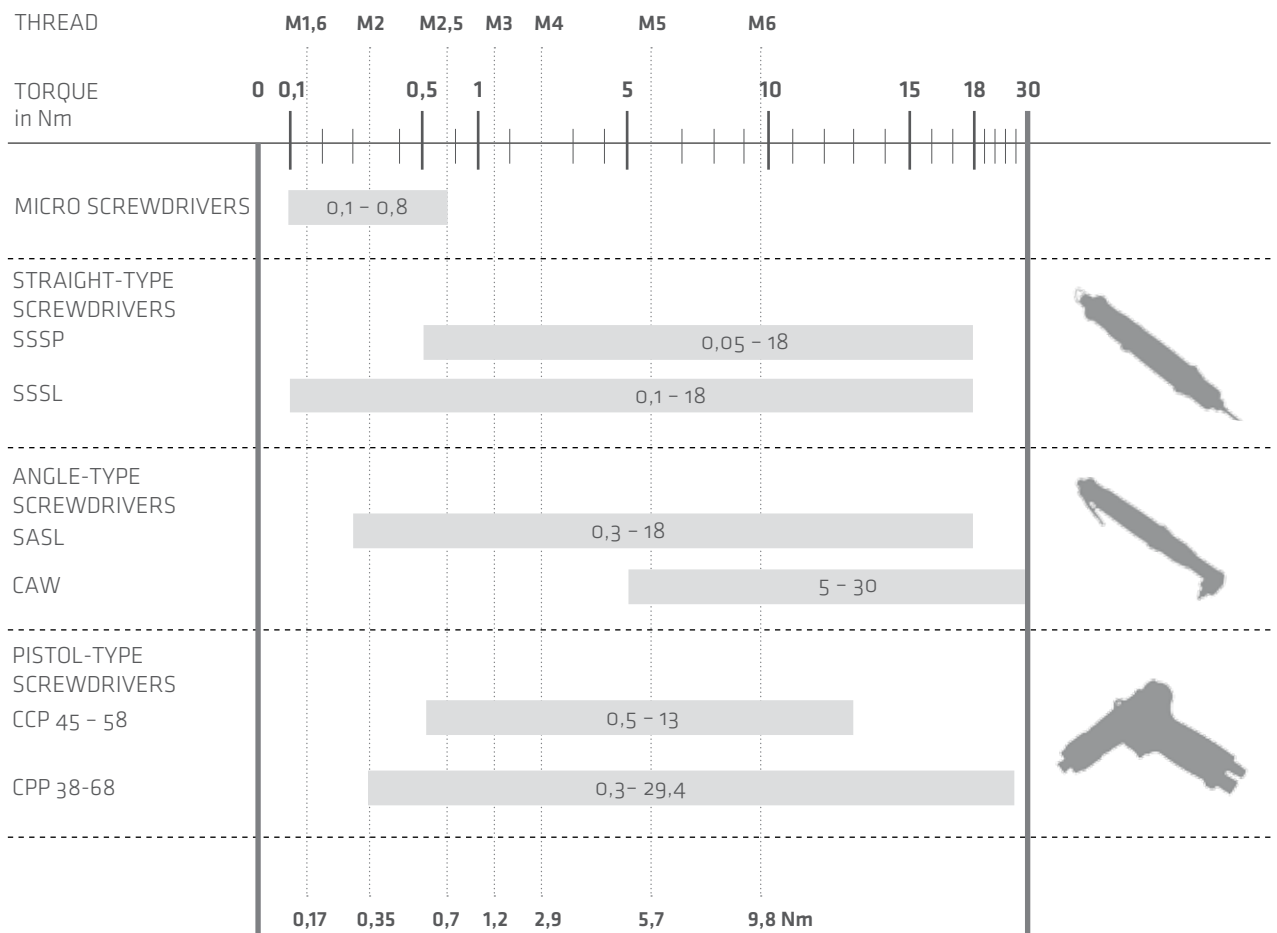

SW SSSP002

Industrial air screwdriver straight type

(0.05 - 0.22 Nm / Push-Start)

Item number: **783801**



<80 dBA



COMPOSITE



PRODUCT DESCRIPTION:

swepro SW SSSP002 - The new swepro industrial screwdriver series impresses with a new low-noise and low vibration, durable and powerful vane motor. A screwing can be performed quickly and accurately due to the high free speed. The compact screwdriver can be operated with one hand, because the direction switch is positioned directly on the ergonomically designed handle. SW SSSP-series has a push-start and stops automatically when the adjusted target torque is fulfilled. A 360° rotating air connection prevents tension between the air hose and the tool.

TECHNICAL DETAILS:

SPEED	1000 1/min
TORQUE RANGE	0.05 - 0.22 Nm
TORQUE DEVIATION	+/- 3 %
DIMENSION	L: 250 mm
WEIGHT	0.60 kg
AIR CONSUMPTION	0.200 m ³ /min
NOISE LEVEL	68 dB(A)
VIBRATION	0.4 m/s ²
ROTATION DIRECTION	Right-Left
ACTIVATION	Push
CONNECTOR	1/4" BSPT

BENEFITS / SPECIAL FEATURES:

- ▶ Low noise, low vibration
- ▶ Automatic shut-off
- ▶ Push-start
- ▶ Ergonomic design

Accessory:

SW 2203

Balancer

Item no.: **789021**



SW 1010

Hose reel

Item no.: **789010**



SW SSSPo20

Industrial air screwdriver straight type

(0.3 - 2.0 Nm / Push-start)

Item number: **783802**



NEW!

PRODUCT DESCRIPTION:

swepro SW SSSPo20 - The new swepro industrial screwdriver series impresses with a new low-noise and low vibration, durable and powerful vane motor. A screwing can be performed quickly and accurately due to the high free speed. The compact screwdriver can be operated with one hand, because the direction switch is positioned directly on the ergonomically designed handle. SW SSSP-series has a push-start and stops automatically when the adjusted target torque is fulfilled. A 360° rotating air connection prevents tension between the air hose and the tool.

BENEFITS / SPECIAL FEATURES:

- ▶ Low noise, low vibration
- ▶ Automatic shut-off
- ▶ Push-start
- ▶ Ergonomic design

TECHNICAL DETAILS:

SPEED	2200 1/min
TORQUE RANGE	0.3 - 2.0 Nm
TORQUE DEVIATION	+/- 3 %
DIMENSION	L: 250 mm
WEIGHT	0.60 kg
AIR CONSUMPTION	0.280 m ³ /min
NOISE LEVEL	72 dB(A)
VIBRATION	0.9 m/s ²
ROTATION DIRECTION	Right-Left
ACTIVATION	Push
CONNECTOR	1/4" BSPT

Accessory:

SW 2445
2-part maintenance unit

Item no.: **782600**



Conflex 1/4" BSPT

Item no.: **768214**



SW SSSP035

Industrial air screwdriver straight type

(0.5 - 3.5 Nm / Push-start)

Item number: **783803**

PRODUCT DESCRIPTION:

swepro SW SSSP035 - The new swepro industrial screwdriver series impresses with a new low-noise and low vibration, durable and powerful vane motor. A screwing can be performed quickly and accurately due to the high free speed. The compact screwdriver can be operated with one hand, because the direction switch is positioned directly on the ergonomically designed handle. SW SSSP-series has a push-start and stops automatically when the adjusted target torque is fulfilled. A 360° rotating air connection prevents tension between the air hose and the tool.



<80 dBA



COMPOSITE

NEW!



BENEFITS / SPECIAL FEATURES:

- ▶ Low noise, low vibration
- ▶ Automatic shut-off
- ▶ Push-start
- ▶ Ergonomic design

TECHNICAL DETAILS:

SPEED	1000 1/min
TORQUE RANGE	0.5 - 3.5 Nm
TORQUE DEVIATION	+/- 3 %
DIMENSION	L: 250 mm
WEIGHT	0.60 kg
AIR CONSUMPTION	0.280 m ³ /min
NOISE LEVEL	72 dB(A)
VIBRATION	0.9 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT

Accessory:

SW 2203

Balancer

Item no.: **789021**



SW 1010

Hose reel

Item no.: **789010**



SW SSSPo6o

Industrial air screwdriver straight type

(1.0 - 6.0 Nm / Push-start)

Item number: **783806**



PRODUCT DESCRIPTION:

swepro SW SSSPo6o - The new swepro industrial screwdriver series impresses with a new low-noise and low vibration, durable and powerful vane motor. A screwing can be performed quickly and accurately due to the high free speed. The compact screwdriver can be operated with one hand, because the direction switch is positioned directly on the ergonomically designed handle. SW SSSP-series has a push-start and stops automatically when the adjusted target torque is fulfilled. A 360° rotating air connection prevents tension between the air hose and the tool.

BENEFITS / SPECIAL FEATURES:

- ▶ Low noise, low vibration
- ▶ Automatic shut-off
- ▶ Push-start
- ▶ Ergonomic design

TECHNICAL DETAILS:

SPEED	2200 1/min
TORQUE RANGE	1.0 - 6.0 Nm
TORQUE DEVIATION	+/- 3 %
DIMENSION	L: 285 mm
WEIGHT	0.88 kg
AIR CONSUMPTION	0.550 m ³ /min
NOISE LEVEL	74 dB(A)
VIBRATION	0.8 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT

Accessory:

SW 3340
Mini oiler

Item no.: **782500**



Conflex 1/4" BSPT

Item no.: **768214**



SW SSSP110

Industrial air screwdriver straight type

(3.0 - 11.0 Nm / Push-start)

Item number: **783807**

PRODUCT DESCRIPTION:

swepro SW SSSP110 - The new swepro industrial screwdriver series impresses with a new low-noise and low vibration, durable and powerful vane motor. A screwing can be performed quickly and accurately due to the high free speed. The compact screwdriver can be operated with one hand, because the direction switch is positioned directly on the ergonomically designed handle. SW SSSP-series has a push-start and stops automatically when the adjusted target torque is fulfilled. A 360° rotating air connection prevents tension between the air hose and the tool.

BENEFITS / SPECIAL FEATURES:

- ▶ Low noise, low vibration
- ▶ Automatic shut-off
- ▶ Push-start
- ▶ Ergonomic design

TECHNICAL DETAILS:

SPEED	550 1/min
TORQUE RANGE	3 - 11 Nm
TORQUE DEVIATION	+/- 3 %
DIMENSION	L: 285 mm
WEIGHT	0.88 kg
AIR CONSUMPTION	0.550 m ³ /min
NOISE LEVEL	75 dB(A)
VIBRATION	0.9 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT
ACTIVATION	Push



Accessory:

SW 2203

Balancer

Item no.: **789021**

169

SW 1010

Hose reel

Item no.: **789010**

167

SW SSSP180

Industrial air screwdriver straight type

(3.0 - 18.0 Nm / Push-start)

Item number: **783808**



PRODUCT DESCRIPTION:

swepro SW SSSP180 - The new swepro industrial screwdriver series impresses with a new low-noise and low vibration, durable and powerful vane motor. A screwing can be performed quickly and accurately due to the high free speed. The compact screwdriver can be operated with one hand, because the direction switch is positioned directly on the ergonomically designed handle. SW SSSP-series has a push-start and stops automatically when the adjusted target torque is fulfilled. A 360 ° rotating air connection prevents tension between the air hose and the tool.

BENEFITS / SPECIAL FEATURES:

- ▶ Low noise, low vibration
- ▶ Automatic shut-off
- ▶ Push-start
- ▶ Ergonomic design

TECHNICAL DETAILS:

SPEED	300 1/min
TORQUE RANGE	3 - 18 Nm
TORQUE DEVIATION	+/- 3 %
DIMENSION	L: 285 mm
WEIGHT	0.90 kg
AIR CONSUMPTION	0.550 m ³ /min
NOISE LEVEL	75 dB(A)
VIBRATION	0.9 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT
ACTIVATION	Push

Accessory:

SW 2445
2-part maintenance unit
Item no.: **782600**



SW T030
Telescopic arm
Item no.: **783640**



SW SSSL010

Industrial air screwdriver straight type

(0.1 - 1.0 Nm / Lever-start)

Item number: **783811**

PRODUCT DESCRIPTION:

swepro SW SSSL010 - The new swepro industrial screwdriver series impresses with a new low-noise and low vibration, durable and powerful vane motor. A screwing can be performed quickly and accurately due to the high free speed. The compact screwdriver can be operated with one hand, because the direction switch is positioned directly on the ergonomically designed handle. SW SSSL-series has a lever-start and stops automatically when the adjusted target torque is fulfilled. A 360° rotating air connection prevents tension between the air hose and the tool.

BENEFITS / SPECIAL FEATURES:

- ▶ Low noise, low vibration
- ▶ Automatic shut-off
- ▶ Lever activation
- ▶ Ergonomic design

TECHNICAL DETAILS:

SPEED	1000 1/min
TORQUE RANGE	0.1 - 1.0 Nm
TORQUE DEVIATION	+/- 3 %
DIMENSION	L: 250 mm
WEIGHT	0.63 kg
AIR CONSUMPTION	0.200 m ³ /min
NOISE LEVEL	72 dB(A)
VIBRATION	0.9 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT
ACTIVATION	Lever



Accessory:

SW 2203

Balancer

Item no.: **789021**



SW 1010

Hose reel

Item no.: **789010**



SW SSSL035

Industrial air screwdriver straight-type

(0.5 - 3.5 Nm / Lever-start)

Item number: **783813**



PRODUCT DESCRIPTION:

swepro SW SSSL035 - The new swepro industrial screwdriver series impresses with a new low-noise and low vibration, durable and powerful vane motor. A screwing can be performed quickly and accurately due to the high free speed. The compact screwdriver can be operated with one hand, because the direction switch is positioned directly on the ergonomically designed handle. SW SSSL-series has a lever-start and stops automatically when the adjusted target torque is fulfilled. A 360 ° rotating air connection prevents tension between the air hose and the tool.

BENEFITS / SPECIAL FEATURES:

- ▶ Low noise, low vibration
- ▶ Automatic shut-off
- ▶ Lever activation
- ▶ Ergonomic design

TECHNICAL DETAILS:

SPEED	1000 1/min
TORQUE RANGE	0,5 - 3,5 Nm
TORQUE DEVIATION	+/- 3 %
DIMENSION	L: 250 mm
WEIGHT	0.63 kg
AIR CONSUMPTION	0.280 m ³ /min
NOISE LEVEL	72 dB(A)
VIBRATION	0.9 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT
ACTIVATION	Lever

Accessory:

SW 3340
Mini oiler
Item no.: **782500**



Conflex
1/4" BSPT
Item no.: **768214**



SW SSSL110

Industrial air screwdriver straight-type

(3.0 - 11.0 Nm / Lever-start)

Item number: **783817**

PRODUCT DESCRIPTION:

swepro SW SSSL110 - The new swepro industrial screwdriver series impresses with a new low-noise and low vibration, durable and powerful vane motor. A screwing can be performed quickly and accurately due to the high free speed. The compact screwdriver can be operated with one hand, because the direction switch is positioned directly on the ergonomically designed handle. SW SSSL-series has a lever-start and stops automatically when the adjusted target torque is fulfilled. A 360° rotating air connection prevents tension between the air hose and the tool.

BENEFITS / SPECIAL FEATURES:

- ▶ Low noise, low vibration
- ▶ Automatic shut-off
- ▶ Lever activation
- ▶ Ergonomic design

TECHNICAL DETAILS:

SPEED	550 1/min
TORQUE RANGE	3.0 - 11.0 Nm
TORQUE DEVIATION	+/- 3 %
DIMENSION	L: 285 mm
WEIGHT	0.90 kg
AIR CONSUMPTION	0.550 m ³ /min
NOISE LEVEL	73 dB(A)
VIBRATION	0.9 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT
ACTIVATION	Lever



Accessory:

SW 2203

Balancer

Item no.: **789021**

169

SW 1010

Hose reel

Item no.: **789010**

167

SW SSSL180

Industrial air screwdriver straight-type

(3.0 - 18.0 Nm / Lever-start)

Item number: **783818**



PRODUCT DESCRIPTION:

swepro SW SSSL180 - The new swepro industrial screwdriver series impresses with a new low-noise and low vibration, durable and powerful vane motor. A screwing can be performed quickly and accurately due to the high free speed. The compact screwdriver can be operated with one hand, because the direction switch is positioned directly on the ergonomically designed handle. SW SSSL-series has a lever-start and stops automatically when the adjusted target torque is fulfilled. A 360° rotating air connection prevents tension between the air hose and the tool

BENEFITS / SPECIAL FEATURES:

- ▶ Low noise, low vibration
- ▶ Automatic shut-off
- ▶ Lever activation
- ▶ Ergonomic design

TECHNICAL DETAILS:

SPEED	300 1/min
TORQUE RANGE	3.0 - 18.0 Nm
TORQUE DEVIATION	+/- 3 %
DIMENSION	L: 285 mm
WEIGHT	0.92 kg
AIR CONSUMPTION	0.550 m ³ /min
NOISE LEVEL	73 dB(A)
VIBRATION	0.9 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT
ACTIVATION	Lever

Accessory:

SW 2445
2-part maintenance unit
Item no.: **782600**



SW T030
Telescopic arm
Item no.: **783640**



SW SASLo20

Industrial air screwdriver angled-type

(0.3 - 2.0 Nm / Lever-Start)

Item number: **783823**

PRODUCT DESCRIPTION:

swepro SW SASLo20 - The new swepro industrial screwdriver series impresses with a new low-noise and low vibration, durable and powerful vane motor. A screwing can be performed quickly and accurately due its angled head at limited and hard to reach spaces. The compact angled screwdriver can be operated very comfortable, because the direction switch is positioned directly on the ergonomically designed handle. SW SASL-series has a lever-start and stops automatically when the adjusted target torque is fulfilled. A 360° rotating air connection prevents tension between the air hose and the too



BENEFITS / SPECIAL FEATURES:

- ▶ Low noise, low vibration
- ▶ Automatic shut-off
- ▶ Lever activation, direction switch
- ▶ Ergonomic design

TECHNICAL DETAILS:

SPEED	2200 1/min
TORQUE RANGE	0.3 - 2.0 Nm
TORQUE DEVIATION	+/- 3 %
DIMENSION	L: 310 mm
WEIGHT	0.77 kg
AIR CONSUMPTION	0.280 m ³ /min
NOISE LEVEL	71 dB(A)
VIBRATION	0.9 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT
ACTIVATION	Lever

Accessory:

SW 2203

Balancer

Item no.: **789021**



SW 1010

Hose reel

Item no.: **789010**



SW SASLo50

Industrial air screwdriver angled-type

(1.0 - 5.0 Nm / Lever-Start)

Item number **783825**



<80 dBA



COMPOSITE

PRODUCT DESCRIPTION:

swepro SW SASLo50 - The new swepro industrial screwdriver series impresses with a new low-noise and low vibration, durable and powerful vane motor. A screwing can be performed quickly and accurately due its angled head at limited and hard to reach spaces. The compact angled screwdriver can be operated very comfortable, because the direction switch is positioned directly on the ergonomically designed handle. SW SASL-series has a lever-start and stops automatically when the adjusted target torque is fulfilled. A 360° rotating air connection prevents tension between the air hose and the tool.

TECHNICAL DETAILS:

SPEED	550 1/min
TORQUE RANGE	1.0 - 5.0 Nm
TORQUE DEVIATION	+/- 3 %
DIMENSION	L: 310 mm
WEIGHT	0.77 kg
AIR CONSUMPTION	0.300 m ³ /min
NOISE LEVEL	71 dB(A)
VIBRATION	0.9 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT
ACTIVATION	Lever

Accessory:

SW 3340

Mini oiler

Item no.: **782500**



Conflex

1/4" BSPT

Item no.: **768214**



BENEFITS / SPECIAL FEATURES:

- ▶ Low noise, low vibration
- ▶ Automatic shut-off
- ▶ Lever activation, direction switch
- ▶ Ergonomic design

SW SASL110

Industrial air screwdriver angled-type

(3.0 - 11.0 Nm / Lever-Start)

Item number: **783826**



<80 dBA



COMPOSITE



PRODUCT DESCRIPTION:

swepro SW SASL110 - The new swepro industrial screwdriver series impresses with a new low-noise and low vibration, durable and powerful vane motor. A screwing can be performed quickly and accurately due its angled head at limited and hard to reach spaces. The compact angled screwdriver can be operated very comfortable, because the direction switch is positioned directly on the ergonomically designed handle. SW SASL-series has a lever-start and stops automatically when the adjusted target torque is fulfilled. A 360 ° rotating air connection prevents tension between the air hose and the tool.

TECHNICAL DETAILS:

SPEED	550 1/min
TORQUE RANGE	3.0 - 11.0 Nm
TORQUE DEVIATION	+/- 3 %
DIMENSION	L: 345 mm
WEIGHT	1.35 kg
AIR CONSUMPTION	0.550 m ³ /min
NOISE LEVEL	74 dB(A)
VIBRATION	0.9 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT
ACTIVATION	Lever

BENEFITS / SPECIAL FEATURES:

- ▶ Low noise, low vibration
- ▶ Automatic shut-off
- ▶ Lever activation, direction switch
- ▶ Ergonomic design

Accessory:

SW 2203

Balancer

Item no.: **789021**



169

SW 1010

Hose reel Item no.: **789010**



167

SW SASL180

Industrial air screwdriver angled-type

(3.0 - 18.0 Nm / Lever-Start)

Item number: **783828**



<80 dBA



COMPOSITE

NEW!

PRODUCT DESCRIPTION:

swepro SW SASL180 - The new swepro industrial screwdriver series impresses with a new low-noise and low vibration, durable and powerful vane motor. A screwing can be performed quickly and accurately due its angled head at limited and hard to reach spaces. The compact angled screwdriver can be operated very comfortable, because the direction switch is positioned directly on the ergonomically designed handle. SW SASL-series has a lever-start and stops automatically when the adjusted target torque is fulfilled. A 360° rotating air connection prevents tension between the air hose and the tool.

TECHNICAL DETAILS:

SPEED	300 1/min
TORQUE RANGE	3.0 - 18.0 Nm
TORQUE DEVIATION	+/- 3 %
DIMENSION	L: 345 mm
WEIGHT	1.45 kg
AIR CONSUMPTION	0.550 m ³ /min
NOISE LEVEL	74 dB(A)
VIBRATION	0.9 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT
ACTIVATION	Lever

Accessory:

SW 2445
2-part maintenance unit
Item no.: **782600**

164

BENEFITS/ SPECIAL FEATURES:

- ▶ Low noise, low vibration
- ▶ Automatic shut-off
- ▶ Lever activation, direction switch
- ▶ Ergonomic design

SW CAW68

Air Composite Wrench angled-type

(5 - 30 Nm / Automatic shut-off)

Item number: **783600**

PRODUCT DESCRIPTION:

swepro SW CAW68 - The angle wrench is equipped with an ergonomic soft grip. Due to the patented shut-off is safe work in different torque levels from 5 - 30 Nm assured. The low-vibration motor has a reduced noise level of 77 dB(A). Triggering the handy air angle wrench is done by a lever-release. With a rotary switch you can change the direction of rotation.

TECHNICAL DETAILS:

SPEED	250 1/min
TORQUE RANGE	5.0 - 30.0 Nm
TORQUE DEVIATION	+/- 3 %
DIMENSION	L: 307 mm Ø: 37 mm
WEIGHT	1.40 kg
AIR CONSUMPTION	0.550 m ³ /min
NOISE LEVEL	77 dB(A)
ACTIVATION	Lever
VIBRATION	0.9 m/s ²



BENEFITS/ SPECIAL FEATURES:

- ▶ Low-noise, low vibration
- ▶ Automatic shut-off
- ▶ Lever activation, direction switch
- ▶ Ergonomic design

Accessory:

SW 2203

Balancer

Item no.: **789021**

169

SW CCP45

Pistol-type screwdriver

(0.5 - 7 Nm / trigger activation / safety clutch)

Item number: **783557**



COMPOSITE

<80 dBA

PRODUCT DESCRIPTION:

swepro SW CCP45 - An ergonomic pistol-type screwdriver with patented and low-noise motor, with extremely low air consumption. With handy button activation and safety clutch, the practical device enables you to carry out reliable work with torques in range 0.5 Nm to 7 Nm.

BENEFITS / SPECIAL FEATURES:

- ▶ Torque setting
- ▶ Triggeractivation
- ▶ Safety clutch
- ▶ Noise-reduced

TECHNICAL DETAILS:

SPEED	750 1/min
TORQUE RANGE	0.5 - 7.0 Nm
TORQUE DEVIATION	+/- 3%
DIMENSION LxH	140 x 142 mm
WEIGHT	0.60 kg
AIR CONSUMPTION	0.280 m ³ /min
NOISE LEVEL	72 dB(A)
ADAPTER	Hexagon bit
ROTATION DIRECTION	Right-Left
ACTIVATION	Trigger
CONNECTION	1/4" BSPT
VIBRATION	1.0 m/s ²

Alternative:



SW CCP48

Item no. **783559**

Pistol-type screwdriver

swepro SW CCP48 - Its an ergonomically designed tool with a patented low-noise motor and very economical air consumption. With its simple operation and comfortable trigger-start and shut-off functionality, the tool is your guarantee for reliable assembly at torques between 1.0 Nm and 7.0 Nm.

BENEFITS / SPECIAL FEATURES:

- ▶ Low air consumption
- ▶ Low-noise
- ▶ Compact design



TECHNICAL DETAILS:

SPEED	1700 1/min
DIMENSION LxH	165 x 164 mm
WEIGHT	0.85 kg
AIR CONSUMPTION	0.550 m ³ /min
TORQUE RANGE	1.0 - 7.0 Nm

SW CCP58

Pistol-type screwdriver

(1 - 13 Nm / trigger activation)

Item number: **783558**

PRODUCT DESCRIPTION:

swepro SW CCP58 - An ergonomic pistol-type screwdriver with patented and low-noise motor, with extremely low air consumption. With handy button activation and safety clutch, the practical device enables you to carry out reliable work with torques in range 1 Nm to 13 Nm.

BENEFITS / SPECIAL FEATURES:

- ▶ Torque setting
- ▶ Trigger activation
- ▶ Safety clutch
- ▶ Noise-reduced



<80 dBA



COMPOSITE

Alternative:

SW CPP50
Pistol-type screwdriver
Higher speed
Less torque

Item no.
783551



TECHNICAL DETAILS:

SPEED	750 1/min
TORQUE RANGE	1 - 13 Nm
TORQUE DEVIATION	+/- 3%
DIMENSION LxH	165 x 164 mm
WEIGHT	0.85 kg
AIR CONSUMPTION	0.550 m ³ /min
NOISE LEVEL	75 dB(A)
ADAPTER	Hexagon bit
ROTATION DIRECTION	Right-Left
ACTIVATION	Trigger
CONNECTOR	1/4" BSPT
VIBRATION	0.1 m/s ²

Accessory:



SW OP20M
Quick-release nipple
Item no.: **800200**



SW 2445
2-part maintenance unit
Item no.: **782600**



SW CPP38 Pistol-type screwdriver

Item number. **783531**

PRODUCT DESCRIPTION:

swepro SW CPP38 - An ergonomic pistol-type screwdriver with patented and low-noise motor, with extremely low air consumption. With practical pressure activation and automatic shut-off function, the device enables you to carry out reliable work with torques in range 0.3 Nm to 2.5 Nm.



<80 dBA

COMPOSITE

BENEFITS / SPECIAL FEATURES:

- ▶ Torque setting
- ▶ Ergonomic and lightweight design
- ▶ Low-noise
- ▶ Low air consumption

TECHNICAL DETAILS:

SPEED	1800 1/min
TORQUE RANGE	0.3 - 2.5 Nm
TORQUE DEVIATION	+/- 3%
DIMENSION	L: 180 mm
WEIGHT	0.64 kg
AIR CONSUMPTION	0.280 m ³ /min
NOISE LEVEL	73 dB(A)
ADAPTER	Hexagon bit
ROTATION DIRECTION	Right-Left
ACTIVATION	Push and trigger
CONNECTOR	1/4" BSPT

SW CPP47 Pistol-type screwdriver

Item number. **783541**

PRODUCT DESCRIPTION:

swepro SW CPP47 - An ergonomic pistol-type screwdriver with patented and low-noise motor, with extremely low air consumption. With practical push-start and automatic shut-off function, the device enables you to carry out reliable work with torques in range 1 Nm to 4.9 Nm.



<80 dBA

COMPOSITE

BENEFITS / SPECIAL FEATURES:

- ▶ Torque setting
- ▶ Ergonomic, low-noise
- ▶ Low air consumption

TECHNICAL DETAILS:

SPEED	550 1/min
TORQUE RANGE	1 - 4.9 Nm
TORQUE DEVIATION	+/- 3%
DIMENSION	L: 180 mm
WEIGHT	0.74 kg
AIR CONSUMPTION	0.280 m ³ /min
NOISE LEVEL	73 dB(A)
ADAPTER	Hexagon bit
ROTATION DIRECTION	Right-Left
ACTIVATION	Push and trigger
CONNECTOR	1/4" BSPT

SW CPP50

Pistol-type screwdriver

(1 - 5.9 Nm / push and trigger activation)

Item number: **783551**

PRODUCT DESCRIPTION:

swepro SW CPP50 - An ergonomic pistol-type screwdriver with patented and low-noise motor, with extremely low air consumption. With practical push-start and automatic shut-off function, the device enables you to carry out reliable work with torques in range 1 Nm to 5.9 Nm.

BENEFITS / SPECIAL FEATURES:

- ▶ Torque setting
- ▶ Ergonomic
- ▶ Low-noise

TECHNICAL DETAILS:

SPEED	1400 1/min
TORQUE RANGE	1 - 5.9 Nm
TORQUE DEVIATION	+/- 3%
DIMENSION	L: 210 mm
WEIGHT	0.95 kg
AIR CONSUMPTION	0.550 m ³ /min
NOISE LEVEL	75 dB(A)
ADAPTER	Hexagon bit
ROTATION DIRECTION	Right-Left
ACTIVATION	Push and trigger
CONNECTOR	1/4" BSPT
VIBRATION	0.9 m/s ²



<80 dBA



COMPOSITE



Alternative:

CCP58

Pistol-type screwdriver

Less speed

Higher torque

Item no.

783558



85



Accessory:

SW 2203

Balancer

Item no.: **789021**



169

SW OP20M

Quick-release nipple

Item no.: **800200**



165

SW 2445

2-part maintenance unit

Item no.: **782600**



164

SW CPP6o

Pistol-type screwdriver

(2.9 - 10.8 Nm / push and trigger activation)

Item number: **783561**



< 80 dBA



COMPOSITE

BENEFITS / SPECIAL FEATURES:

- ▶ Torque setting
- ▶ Ergonomic
- ▶ Low-noise

PRODUCT DESCRIPTION:

swepro SW CPP6o - An ergonomic pistol-type screwdriver with patented and low-noise motor, with extremely low air consumption. With practical push-start and automatic shut-off function, the device enables you to carry out reliable work with torques in range 2.9 Nm to 10.8 Nm.

TECHNICAL DETAILS:

SPEED	550 1/min
TORQUE RANGE	2.9 - 10.8 Nm
TORQUE DEVIATION	+/- 3%
DIMENSION	L: 210 mm
WEIGHT	0.95 kg
AIR CONSUMPTION	0.550 m ³ /min
NOISE LEVEL	74 dB(A)
ADAPTER	Hexagon bit
ROTATION DIRECTION	Right-Left
ACTIVATION	Push and trigger
CONNECTOR	1/4" BSPT
VIBRATION	0.3 m/s ²

Accessory:

SW 2203

Balancer

Item no.: **789021**



169

SW OP2oM

Quick-release nipple

Item no.: **800200**



165

SW 2445

2-part maintenance unit

Item no.: **782600**



164

SW CPP65

Pistol-type screwdriver

(2.9 - 17.6 Nm / push and trigger activation)

Item number: **783571**

PRODUCT DESCRIPTION:

swepro SW CPP65 - An ergonomic pistol-type screwdriver with patented and low-noise motor, with extremely low air consumption. With practical push-start and automatic shut-off function, the device enables you to carry out reliable work with torques in range 2.9 Nm to 17.6 Nm.

BENEFITS / SPECIAL FEATURES:

- ▶ Torque setting
- ▶ Ergonomic
- ▶ Low-noise

TECHNICAL DETAILS:

SPEED	300 1/min
TORQUE RANGE	2.9 - 17.6 Nm
TORQUE DEVIATION	+/- 3%
DIMENSION	L: 210 mm
WEIGHT	1.10 kg
AIR CONSUMPTION	0.550 m ³ /min
NOISE LEVEL	76 dB(A)
ADAPTER	Hexagon bit
ROTATION DIRECTION	Right-Left
ACTIVATION	Push and trigger
CONNECTOR	1/4" BSPT
VIBRATION	0.4 m/s ²



< 80 dBA

COMPOSITE

Alternative:

SW CPP68

Item no.
783572

NEW!

Pistol-type screwdriver

swepro SW CPP68 - With its simple operation and automatic push-start and shut-off functionality, the tool is your guarantee for reliable assembly at torques between 4.9 Nm and 29.4 Nm.

BENEFITS / SPECIAL FEATURES:

- ▶ Low noise
- ▶ Easy to use
- ▶ Direction switch

TECHNICAL DETAILS:

SPEED	250 1/min
TORQUE RANGE	4.9 - 29.4 Nm
TORQUE DEVIATION	+/- 3 %
DIMENSION	L: 210 mm
WEIGHT	1.10 kg





<80 dBA



COMPOSITE

SW CP Straight-type screddriver-series

BENEFITS / SPECIAL FEATURES:

- ▶ Push-start
- ▶ Torque deviation +/- 3 %
- ▶ Hexagon bit
- ▶ Connector 1/4" BSPT
- ▶ Rotation direction Right-Left

MODELS	SW CP10	SW CP30	SW CP45	SW CP50	SW CP60	SW CP65
ITEM NO.	783510	783530	783545	783550	783560	783570
SPEED (1/MIN)	1000	1800	800	1400	550	300
TORQUE RANGE (NM)	0.05 - 0.2	0.3 - 1.7	0.8 - 4.0	0.7 - 4.9	1.5 - 9.3	2.9 - 17.7
DIMENSION (L IN MM)	180	180	180	215	215	215
WEIGHT (KG)	0.48	0.48	0.48	0.79	0.79	0.80
AIR CONSUMPTION (M ³ /MIN)	0.20	0.28	0.30	0.55	0.55	0.60
NOSISE LEVEL (DB(A))	70	74	78	78	78	78



<80 dBA



COMPOSITE

SW CA Angle-type screwdriver-series

BENEFITS / SPECIAL FEATURES:

- ▶ Lever-start
- ▶ Torque deviation +/- 3 %
- ▶ Hexagon bit
- ▶ Connector 1/4" BSPT
- ▶ Rotation direction Right-Left

MODELS	SW CA30	SW CA45	SW CA50	SW CA60	SW CA65
ITEM NO.	783532	783542	783552	783562	783564
SPEED (1/MIN)	1800	800	1400	550	300
TORQUE RANGE (NM)	0.3 - 1.7	0.8 - 4.0	0.7 - 4.9	1.5 - 9.3	2.9 - 17.7
DIMENSION (L IN MM)	270	270	335	335	335
WEIGHT (KG)	0.69	0.69	1.30	1.30	1.40
AIR CONSUMPTION (M ³ /MIN)	0.28	0.30	0.55	0.55	0.60
NOSISE LEVEL (DB(A))	74	73	78	78	77

SW CL Straight-type scredriver-series

BENEFITS / FEATURES:

- ▶ Lever-start
- ▶ Torque deviation +/- 3 %
- ▶ Hexagon bit
- ▶ Connector 1/4" BSPT
- ▶ Rotation direction Right-Left



MODELS	SW CL20	SW CL45	SW CL60	SW CL65
ITEM NO.	783523	783543	783563	783565
SPEED (1/MIN)	1000	800	550	300
TORQUE RANGE (NM)	0.1 - 0.8	0.8 - 3.9	1.5 - 9.5	3 - 18
DIMENSION (L IN MM)	210	210	245	240
WEIGHT (KG)	0.52	0.52	0.82	0.84
AIR CONSUMPTION (M ³ /MIN)	0.20	0.30	0.55	0.55
NOSISE LEVEL (DB(A))	74	73	78	78

SW CS Straight-type scredriver-series

BENEFITS / FEATURES:

- ▶ Lever-start
- ▶ Hexagon bit
- ▶ Connector 1/4" BSPT
- ▶ Rotation Direction Light-Reft
- ▶ Safety clutch



MODELS	SW CS45	SW CS58
ITEM NO.	783410	783420
SPEED (1/MIN)	750	750
TORQUE RANGE (NM)	0.5 - 6	0.6 - 9
DIMENSION (L IN MM)	140	195
WEIGHT (KG)	0.60	0.84
AIR CONSUMPTION (M ³ /MIN)	0.28	0.55
NOISE LEVEL (DB(A))	72	75

SW 4508 Screwdriver pistol type

Item number: **783573**

PRODUCT DESCRIPTION:

swepro SW 4508 - This robust pistol screwdriver has an very fast and powerful drive. The short design of the tool allows you safe and precise applications in confined spaces. Through a handy direction change switch, and the pleasant-button release to operate the grinder is very simple.



BENEFITS / SPECIAL FEATURES:

- ▶ Direction switch
- ▶ Fast and powerful drive

TECHNICAL DETAILS:

SPEED	8500 1/min
MAX. TORQUE	61 Nm
DIMENSION	L: 176 mm
WEIGHT	1.14 kg
AIR CONSUMPTION	0.110 m ³ /min
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT
ACTIVATION	Button
NOISE LEVEL	77 dB(A)
VIBRATION	2.5 m/s ²

SW 4509 Screwdriver pistol type

Item number: **783574**

PRODUCT DESCRIPTION:

swepro SW 4509 - This robust pistol screwdriver has an very fast and powerful drive. The short design of the tool allows you safe and precise applications in confined spaces. It has an 3/8" square drive anvil for powerful applications by using nuts. Through a handy direction change switch, and the pleasant-button release to operate the grinder is very simple.



BENEFITS / SPECIAL FEATURES:

- ▶ Fast and powerful drive
- ▶ Low air consumption

TECHNICAL DETAILS:

SPEED	8500 1/min
MAX. TORQUE	122 Nm
DIMENSION	L: 160 mm
WEIGHT	1.14 kg
AIR CONSUMPTION	0.080 m ³ /min
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT
ACTIVATION	Button
NOISE LEVEL	87 dB(A)
VIBRATION	3.5 m/s ²



IMPACT WRENCHES

swepro offers its customers a broad product portfolio – from the practical and compact 3/8" impact wrench with a maximum torque of 380 Nm to the 1 1/2" professional impact wrench with a maximum torque of 4878 Nm. Your swepro customer advisor will be glad to provide you with assistance in selecting the "right" impact wrench.

SW 5141

Mini air impact wrench

(1/2" / 542 Nm)

Item number: **785751**



BENEFITS / SPECIAL FEATURES:

- ▶ Torque setting
- ▶ Sturdy, compact
- ▶ Button activation

Alternative:

SW 5245

Angled air impact wrench
Low speed

Item no. **785730**  105



PRODUCT DESCRIPTION:

swepro SW 5141 - The Air Impact Wrench SW 5141 has a robust housing and a compact design. His short design allows applications in confined work areas and the tool can be used in many sectors of industry. SW 5141 features a convenient trigger on the handle. It is possible to mount the impact wrench to a suspension

TECHNICAL DETAILS:

SPEED	11500 1/min
MAX. TORQUE	542 Nm
LEVEL SETTING	6
DIMENSION	L: 122 mm
WEIGHT	1.60 kg
AIR CONSUMPTION	0.170 m ³ /min
NOISE LEVEL	96 dB(A)
VIBRATION	12.49 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT
ACTIVATION	Trigger

Accessory:

SW 3340

Mini oiler

Item no.: **782500**  164

SW 2445

2-part maintenance unit

Item no.: **782600**  164

SW C541

Impact wrench

(1/2" / 406 Nm)

Item number **785705**

PRODUCT DESCRIPTION:

swepro SW C541 - The lightweight, composite housing and the ergonomic and compact design enable the 1/2" impact wrench to be used tirelessly in many sectors of industry. Ideal for installation and maintenance work, the device features an insulated, low-vibration damping handle and a multi-level setting with Right/Left operation. Recommended working range: up to M16 - max. torque 406 Nm.

BENEFITS / SPECIAL FEATURES:

- ▶ Compact design
- ▶ Low weight
- ▶ Very strong for its size

TECHNICAL DETAILS:

SPEED	10000 1/min
MAX. TORQUE	406 Nm
LEVEL SETTING	4
DIMENSION	L: 165 mm
WEIGHT	1.20 kg
AIR CONSUMPTION	0.170 m ³ /min
SQUARE DRIVE	1/2"
NOISE LEVEL	92 dB(A)
VIBRATION	6.87 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT

LEVEL SETTING Nm

1. FORWARDS	299
2. FORWARDS	353
3. FORWARDS	406
BACKWARDS	542



Alternative:

SW C535

Impact wrench

Item no.
785738



swepro SW C535 - Its light-weight composite housing and ergonomic and compact design allows you to effortlessly use this 3/8" impact wrench.

BENEFITS / SPECIAL FEATURES:

- ▶ Low noise
- ▶ Easy to use
- ▶ Direction switch

TECHNICAL DETAILS:

SPEED	10000 1/min
MAX TORQUE	390 Nm
LEVEL SETTING	4
DIMENSION	L: 165 mm
WEIGHT	1.20 kg
AIR CONSUMPTION	0.170 m ³ /min
SQUARE DRIVE	3/8"
NOISE LEVEL	92 dB(A)
VIBRATION	6.87 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT

SW C540A

Professional impact wrench

(1/2" / 881 Nm)

Item number: **785704**



COMPOSITE

PRODUCT DESCRIPTION:

swepro SW C540A - The lightweight, composite housing and the ergonomic and compact design enable the 1/2" professional impact wrench to be used tirelessly in many sectors of industry. Ideal for installation and maintenance work, the device features an insulated, low-vibration damping handle and a multi-level setting with Right/Left operation.

BENEFITS / SPECIAL FEATURES:

- ▶ Compact design
- ▶ Lightweight composite housing
- ▶ High torque

TECHNICAL DETAILS:

SPEED	7500 1/min
MAX. TORQUE	881 Nm
LEVEL SETTING	4
DIMENSION	L: 195 mm
WEIGHT	2.00 kg
AIR CONSUMPTION	0.260 m ³ /min
SQUARE DRIVE	1/2"
NOISE LEVEL	92 dB(A)
VIBRATION	8.9 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT

Alternative:

SW C555
Air impact wrench
More torque

Item no. **785680**

99



NEW!

Accessory:

SW 1010
Hose reel

Item no.: **789010**

167

Conflex
1/4" BSPT

Item no.: **768214**

166

SW 3340
Mini oiler

Item no.: **782500**

164

SW 2445

2-part maintenance unit

Item no.: **782600**

164

SW C504

Professional impact wrench

(1/2" / 949 Nm)

Item number: **785600**

PRODUCT DESCRIPTION:

swepro SW C504 - The lightweight composite housing and the ergonomic and compact design enable the 1/2" professional impact wrench to work tirelessly in many sectors of industry. Ideal for installation and maintenance work, the device features an insulated, low-vibration damping handle and a multi-level setting with Right/Left operation.

TECHNICAL DETAILS:

SPEED	10000 1/min
MAX. TORQUE	949 Nm
LEVEL SETTING	5
DIMENSION	L: 178 mm
WEIGHT	2.00 kg
AIR CONSUMPTION	0.370 m ³ /min
SQUARE DRIVE	1/2"
NOISE LEVEL	93 dB(A)
VIBRATION	5.7 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT



BENEFITS / SPECIAL FEATURES:

- ▶ Compact design
- ▶ Lightweight composite housing
- ▶ High torque

LEVEL SETTING Nm

1. FORWARDS	542
2. FORWARDS	813
3. FORWARDS	949
1. BACKWARDS	610
2. BACKWARDS	949

Accessory:

SW 1010

Hose reel

Item no.: **789010**



Conflex

1/4" BSPT

Item no.: **768214**



SW 3340

Mini oiler

Item no.: **782500**



SW 2445

2-part maintenance unit

Item no.: **782600**



SW C562

Professional impact wrench

(3/4" / 1357 Nm)

Item number: **785650**



PRODUCT DESCRIPTION:

swepro SW C562 - The lightweight, composite housing and the compact design enable the 3/4" professional impact wrench to work tirelessly in many sectors of industry. Ideal for installation and maintenance work, the device features an insulated, low-vibration damping handle and a multi-level setting with Right/Left operation. Recommended working range: up to M25 - max. torque 1357 Nm.

BENEFITS / SPECIAL FEATURES:

- ▶ High torque
- ▶ Ergonomic handle
- ▶ Extended drive square-end
- ▶ Composite housing

TECHNICAL DETAILS:

SPEED	4000 1/min
MAX. TORQUE	1357 Nm
LEVEL SETTING	4
DIMENSION	L: 240 mm
WEIGHT	3.80 kg
AIR CONSUMPTION	0.340 m ³ /min
SQUARE DRIVE	3/4"
NOISE LEVEL	92 dB(A)
VIBRATION	3.6 m/s ²
ROTATION DIRECTION	Right-Left
ACTIVATION	Trigger
CONNECTOR	3/8" BSPT

LEVELS Nm

1. FORWARDS	339
2. FORWARDS	1180
3. FORWARDS	1357
BACKWARDS	1491

Alternative:

SW C582

Item no. **785875**



Professional impact wrench

swepro SW C582 - Its light-weight composite housing and ergonomic and compact design allows you to effortlessly use this 1" professional impact wrench in many sectors of industry.

BENEFITS / SPECIAL FEATURES:

- ▶ High torque
- ▶ Ergonomic handle
- ▶ Extended drive square-end

TECHNICAL DETAILS:

SPEED	4000 1/min
DIMENSION	L: 240 mm
WEIGHT	4.00 kg
AIR CONSUMPTION	0.340 m ³ /min
SQUARE DRIVE	1"

SW C555

Impact wrench

Item number: **785680**

TECHNICAL DETAILS:

SPEED	8000 1/min
MAX. TORQUE	1508 Nm
MAX. PRESSURE	6.3 bar
DIMENSION	L: 197 mm
WEIGHT	2.30 kg
AIR CONSUMPTION	0.480 m ³ /min
NOISE LEVEL	96 dB(A)
VIBRATION	8.1 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT
ACTIVATION	Trigger
Level setting	4



COMPOSITE

PRODUCT DESCRIPTION:

swepro SW C555 - Ideal for assembly and maintenance, the 1/2" impact wrench convinces through its ergonomic low vibration and thermally insulated handle and multi-step settings for clockwise/anticlockwise rotation. Recommended max. torque 1508Nm.

BENEFITS / SPECIAL FEATURES:

- ▶ Insulated handle
- ▶ High torque

SW C575

Impact wrench

Item number: **785690**

TECHNICAL DETAILS:

SPEED	8000 1/min
MAX. TORQUE	1508 Nm
MAX. PRESSURE	6.3 bar
DIMENSION	L: 211 mm
WEIGHT	2.30 kg
AIR CONSUMPTION	0.540 m ³ /min
NOISE LEVEL	96 dB(A)
VIBRATION	8.1 m/s ²
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT
Level setting	4



COMPOSITE

PRODUCT DESCRIPTION:

swepro SW C575 - Its light-weight composite housing and compact design allows you to effortlessly use this 3/4" heavy-duty impact wrench in many sectors of industry. Recommended max. torque 1508 Nm.

BENEFITS / SPECIAL FEATURES:

- ▶ Composite enclosure
- ▶ Low vibration

SW 5830P

Air impact wrench

(1" / 3428 Nm)

Item number: **785661**



PRODUCT DESCRIPTION:

swepro SW 5830P - Its light weight composite housing allows this well-balanced and practical 1" impact wrench pistol type to be used effortlessly in many sectors of industry. This tool is for two-hand use, due to its particularly compact design and its side handle. The tool convinces through its very high max. torque, despite its very low own weight. Recommended working range: up to M36 - max. torque 3428 Nm.

BENEFITS / SPECIAL FEATURES:

- ▶ Compact design
- ▶ Light weight composite housing
- ▶ Torque setting

TECHNICAL DETAILS:

SPEED	5000 1/min
MAX. TORQUE	3428 Nm
DIMENSION	L: 275 mm
WEIGHT	7.30 kg
AIR CONSUMPTION	0.255 m ³ /min
LEVEL SETTING	6
ROTATION DIRECTION	Right-Left
ACTIVATION	Trigger
CONNECTOR	1/2" BSPT
NOISE LEVEL	100 dB(A)
VIBRATION	16.4 m/s ²

SW 5830

Air impact wrench

(1" / 3.428 Nm)

Item number: **785660**

PRODUCT DESCRIPTION:

swepro SW 5830 - Its light weight composite housing allows this well-balanced and practical 1" impact wrench straight-type to be used effortlessly in many sectors of industry. This tool is for two-hand use, due to its particularly compact design and its side handle. The tool convinces through its very high max. torque, despite its very low own weight. Recommended working range: up to M36 - max. torque 3428 Nm.

BENEFITS / SPECIAL FEATURES:

- ▶ High torque
- ▶ Practical
- ▶ Button activation
- ▶ Handle mounted on the side

TECHNICAL DETAILS:

SPEED	5000 1/min
MAX. TORQUE	3428 Nm
DIMENSION	L: 347 mm
WEIGHT	7.40 kg
AIR CONSUMPTION	0.255 m ³ /min
LEVEL SETTING	6
ROTATION DIRECTION	Right-Left
ACTIVATION	Trigger
CONNECTOR	1/2" BSPT
NOISE LEVEL	104 dB(A)
VIBRATION	14.5 m/s ²



Alternative:

SW 5830-6

Air impact wrench

Item no.
785662

swepro SW 5830-6 - Its light weight composite housing allows this well-balanced and practical 1" impact wrench straight-type to be used effortlessly.

BENEFITS/ SPECIAL FEATURES:

- ▶ High performance
- ▶ Extended shaft
- ▶ Handle mounted on the side

TECHNICAL DETAILS:

SPEED	5000 1/min
DIMENSION	L: 487 mm
WEIGHT	8.30 kg
AIR CONSUMPTION	0.255 m ³ /min
CONNECTOR	1/2" BSPT



NEW!

SW C581

Professional impact wrench

(1" / 2400 Nm)

Item number: **785870**



PRODUCT DESCRIPTION:

swepro SW C581 - The lightweight composite housing enables this balanced and practical 1" impact wrench to work tirelessly in many sectors of industry. The device is suited to right and left-handers thanks to its particularly compact design and an adjustable handle on the side. The device boasts a very high maximum torque despite its very low dead weight. Recommended working range: up to M33 - max. torque 2400 Nm.

Alternative:

SW C581-6

Item no. **785880**

Professional impact wrench

swepro SW C581-6 - Its light weight composite housing allows this well-balanced and practical 1" impact wrench to be used effortlessly in many sectors of industry.

BENEFITS / SPECIAL FEATURES:

- ▶ Lightweight composite housing
- ▶ Strong torque
- ▶ Practical
- ▶ Extended shaft



TECHNICAL DETAILS:

SPEED	5000 1/min
DIMENSION	L: 550 mm
WEIGHT	8.40 kg
AIR CONSUMPTION	0.380 m ³ /min
CONNECTOR	1/2" BSPT

TECHNICAL DETAILS:

SPEED	5000 1/min
MAX. TORQUE	2400 Nm
DIMENSION	L: 420 mm
WEIGHT	6.88 kg
AIR CONSUMPTION	0.380 m ³ /min
SQUARE DRIVE	1"
NOISE LEVEL	82 dB(A)
VIBRATION	4.0 m/s ²
ROTATION DIRECTION	Right-Left
ACTIVATION	Trigger
CONNECTOR	1/2" BSPT

LEVELS Nm

1. FORWARDS	814
2. FORWARDS	1220
3. FORWARDS	2400
1. BACKWARDS	949
2. BACKWARDS	1492
3. BACKWARDS	2712

SW 5597

Heavy duty impact wrench

(1 1/2" / 4878 Nm)

Item number: **785890**



PRODUCT DESCRIPTION:

swepro SW 5597 - This extremely powerful industrial wrench is for the heaviest use in the maintenance of production equipment, as well as challenging work in the petrochemical industry, suitable for mining and numerous applications in shipbuilding. The unit affords great strength-weight-ratio and mastered with a max. torque of 4878 Nm also screwed to a screw size of M50 and more.

BENEFITS / SPECIAL FEATURES:

- ▶ High performance
- ▶ M50 and more
- ▶ E.g. suitable for mining and shipbuilding

TECHNICAL DETAILS:

SPEED	3600 1/min
MAX. TORQUE	4878 Nm
MAX. PRESSURE	6.3 bar
DIMENSION	L: 440 mm
WEIGHT	17.30 kg
AIR CONSUMPTION	0.900 m ³ /min
NOISE LEVEL	95 dB(A)
VIBRATION	6.5 m/s ²
ROTATION DIRECTION	Right-Left
ACTIVATION	Trigger
CONNECTOR	1/2" BSPT

SW 5567

Impact wrench

Item number: **785860**

PRODUCT DESCRIPTION:

swepro SW 5567 - The powerful and sturdy 3/4" impact wrench ensures excellent reachability with its narrow front end, even in places that are difficult to access. The Right/Left directions and the multi-level torque setting facilitate a broad spectrum of work applications. The lightweight metal housing and the low air consumption mean it is perfect for use in industrial and skilled trade applications.



BENEFITS / SPECIAL FEATURES:

- ▶ Robust
- ▶ Compact design

TECHNICAL DETAILS:

SPEED	6300 1/min
DIMENSION	L: 217 mm
WEIGHT	3.00 kg
MAX. TORQUE	813 Nm
LEVEL SETTING	4
NOSIE LEVEL	94 dB(A)
VIBRATION	8.64 m/s ²
ROTATION DIRECTION	Right-Left
SQUARE DRIVE	3/4"
CONNECTOR	1/4" BSPT

SW 55444

Impact wrench

Item number: **785750**

PRODUCT DESCRIPTION:

swepro SW 55444 - This low budget 1/2" impact wrench is characterised by its high performance and ergonomic design. The design and the ergonomic rubber handle allow safe and effortless work. Recommended working range: up to M20 - max. torque 813 Nm.



BENEFITS / SPECIAL FEATURES:

- ▶ Rubber handl
- ▶ Metal variant

TECHNICAL DETAILS:

SPEED	6500 1/min
DIMENSION	L: 182 mm
WEIGHT	2.80 kg
MAX. TORQUE	813 Nm
LEVEL SETTING	4
NOSIE LEVEL	91 dB(A)
VIBRATION	5.6 m/s ²
ROTATIONAL DIRECTION	Right-Left
SQUARE DRIVE	1/2"
CONNECTOR	1/4" BSPT

SW 5245

Angled air impact wrench

(1/2" / 244 Nm)

Item number: **785730**



PRODUCT DESCRIPTION:

swepro SW 5245 - The lightweight, composite housing and the ergonomic and compact design enable the 1/2" angled air impact wrench to work tirelessly in many sectors of industry. Ideal for installation and maintenance work, the device features an insulated, low-vibration damping handle and a multi-level setting with Right/Left operation.

BENEFITS / SPECIAL FEATURES:

- ▶ Ergonomic design
- ▶ Sturdy design
- ▶ Button activation
- ▶ Direction switch

TECHNICAL DETAILS:

SPEED	7000 1/min
MAX. TORQUE	244 Nm
MAX. PRESSURE	6.3 bar
DIMENSION	L: 341 mm
WEIGHT	1.80 kg
NOSIE LEVEL	97 dB(A)
ROTATIONAL DIRECTION	Right-Left
ACTIVATION	Button
CONNECTOR	1/4" BSPT
AIR CONSUMPTION	0.400 m ³ /min

RATCHET WRENCHES

The powerful and compact compressed air ratchet wrenches are perfect for working in confined and difficult to access places. Most of our swepro ratchet wrenches already have a particularly lightweight composite housing and insulated plastic handles. The patented, flat and enclosed head system provides protection from dust and dirt and guarantees long service life. Screws and bolts can be undone and secured quickly and reliably with high rotation speeds.

SELECTION AID

PRODUCT	SQUARE DRIVE	TORQUE (Nm)	WEIGHT (kg)	LENGTH (mm)	HOUSING ISOLATION	PAGE
SW 55502	1/4"	20	0.45	133		107
SW 55503	3/8"	20	0.45	130		108
SW 55523	3/8"	54	0.66	205	x	109
SW 55522	1/4"	27	0.66	205	x	109
SW 55529	1/2"	163	1.76	345	x	110
SW 55548	1/2"	136	1.24	307	x	111
SW 3002	1/2"	82	1.20	276	x	112
SW 3003	3/8"	82	1.20	276	x	112
SW 5554	1/2"	122	2.00	365		113

SW 55502

Mini ratchet wrench

(1/4" / square drive)

Item number: **789031**



PRODUCT DESCRIPTION:

swepro SW 55502 - This ratchet wrench is particularly small and compact. As a result it is perfect for narrow and hard to access places. Screws and bolts are undone and secured quickly and reliably thanks to its high rotation speed.

BENEFITS / SPECIAL FEATURES:

- ▶ Very small ratchet wrench
- ▶ Sturdy metal housing
- ▶ Low compressed air consumption

TECHNICAL DETAILS:

SPEED	260 1/min
MAX. TORQUE	20 Nm
DIMENSION	L: 133 mm
WEIGHT	0.45 kg
AIR CONSUMPTION	0.070 m ³ /min
SQUARE DRIVE	1/4"
ROTATION DIRECTION	Right-Left
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	80 dB(A)
VIBRATION	1.0 m/s ²

Accessory:

Conflex
1/4" BSPT

Item no.: **768214**



SW 3340
Mini oiler

Item no.: **782500**



SW 2445

Maintenance unit 2-way

Item no.: **782600**



SW 55503

Mini ratchet wrench

(3/8" / square drive)

Item number: **789030**



PRODUCT DESCRIPTION:

swepro SW 55503 - This ratchet wrench is particularly small and compact. As a result it is perfect for narrow and hard to access places. Screws and bolts are undone and secured quickly and reliably thanks to its high rotation speed. The SW 55503 has practical lever activation and the extract air is routed to the rear.

BENEFITS / SPECIAL FEATURES:

- ▶ Very compact and small
- ▶ Low compressed air consumption
- ▶ Sturdy metal housing

TECHNICAL DETAILS:

SPEED	260 1/min
MAX. TORQUE	20 Nm
DIMENSION	L: 130 mm
WEIGHT	0.45 kg
AIR CONSUMPTION	0.070 m ³ /min
SQUARE DRIVE	3/8"
ROTATION DIRECTION	Right-Left
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	80 dB(A)
VIBRATION	1.0 m/s ²

Accessory:

Conflex
1/4" BSPT

Item no.: **768214**



SW 3340
Mini oiler

Item no.: **782500**



SW 2445

2-part maintenance unit

Item no.: **782600**



SW 55523

High-performance ratchet wrench

(3/8" / square drive)

Item number: **789035**

swepro SW 3003 - The particularly lightweight, composite housing and the compact design mean this powerful ratchet wrench also lends itself to work in confined and hard to access places. The patented, flat and enclosed head system provides protection from dust and dirt and guarantees long service life. In addition to a low-vibration and insulated plastic handle, the device has a discharge air duct with an air outlet ring rotatable by 360 degrees.



BENEFITS / SPECIAL FEATURES:

- ▶ Enclosed head system
- ▶ High speed
- ▶ Discharge air duct adjustable

TECHNICAL DETAILS:

SPEED	350 1/min
MAX. TORQUE	54 Nm
DIMENSION	L: 205 mm
WEIGHT	0.66 kg
AIR CONSUMPTION	0.100 m ³ /min
SQUARE DRIVE	3/8"
NOISE LEVEL	87 dB(A)
ACTIVATION	Lever
ROTATION DIRECTION	Right-Left
CONNECTOR	1/4" BSPT
VIBRATION	2.9 m/s ²

Alternative:

Item no.
789034

SW 55522

High-performance ratchet wrench


swepro SW 55522 - The heavy duty air ratchet wrench is designed for removal and replacement of screw bolts and nuts in confined areas.

BENEFITS / SPECIAL FEATURES:

- ▶ Enclosed head system
- ▶ Discharge air duct adjustable
- ▶ Low compressed air consumption

TECHNICAL DETAILS:

SPEED	250 1/min
DIMENSION	L: 205 mm
WEIGHT	0.66 kg
SQUARE DRIVE	1/4"
NOISE LEVEL	88 dB(A)
MAX. TORQUE	27 Nm



SW 55529

Heavy duty air ratchet wrench

(1/2" / 163 Nm)

Item number: **789037**



COMPOSITE

NEW!

PRODUCT DESCRIPTION:

swepro SW 55529 - The heavy duty air ratchet wrench is designed for removal and replacement of screw bolts and nuts in confined areas. SW 55529 is excellent for body shop and can be ideally used for radiation removal, spark plug replacement, water pump work and dashboard. The ratchet housing design is dust-free and keeps dirt away. Another advantages are the ergonomically enhanced composite handle grip and a less counterforce during operation.

BENEFITS / SPECIAL FEATURES:

- ▶ Light weight composite housing
- ▶ Insulated soft grip
- ▶ High speed

TECHNICAL DETAILS:

SPEED	600 1/min
MAX. TORQUE	163 Nm
DIMENSION	L: 345 mm
WEIGHT	1.76 kg
AIR CONSUMPTION	0.119 m ³ /min
ROTATION DIRECTION	right-left
ACTIVATION	Lever
NOISE LEVEL	94 dB(A)
VIBRATION	7.0 m/s ²

SW 55548

Heavy duty air ratchet wrench

(1/2" / 136 Nm)

Item number: **789038**



PRODUCT DESCRIPTION:

swepro SW 55548 - The heavy duty air ratchet wrench is designed for removal and replacement of screw bolts and nuts in confined areas. SW 55548 is excellent for body shop and can be ideally used for radiation removal, spark plug replacement, water pump work and dashboard. The ratchet housing design is dust-free and keeps dirt away. Another advantages are the ergonomically enhanced composite handle grip.

BENEFITS / SPECIAL FEATURES:

- ▶ Light weight composite housing
- ▶ Insulated soft grip
- ▶ High speed

TECHNICAL DETAILS:

SPEED	225 1/min
MAX. TORQUE	136 Nm
DIMENSION	L: 307 mm
WEIGHT	1.24 kg
AIR CONSUMPTION	0.113 m ³ /min
ACTIVATION	Lever
ROTATION DIRECTION	Right-Left
NOISE LEVEL	95 dB(A)
VIBRATION	5.7 m/s ²

SW 3002

Ratchet wrench

(1/2" / 82 Nm)

Item number: **789002**



PRODUCT DESCRIPTION:

swepro SW 3002 - The powerful drive of this ratchet wrench means it can also be used for high torques up to 82 Nm. The insulated plastic handle sits comfortably in the hand. An adjustment wheel is used to adjust the torque quickly and easily on 4 levels. The discharge air duct is variably adjustable with a rotating ring.

BENEFITS / SPECIAL FEATURES:

- ▶ Very powerful
- ▶ Insulated plastic handle
- ▶ 4-way adjustable setting

TECHNICAL DETAILS:

SPEED	180 1/min
MAX. TORQUE	82 Nm
DIMENSION	L: 276 mm
WEIGHT	1.20 kg
AIR CONSUMPTION	0.120 m ³ /min
SQUARE DRIVE	1/2"
ROTATION DIRECTION	Right-Left
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	94 dB(A)
VIBRATION	1.9 m/s ²

Alternative:

SW 3003

Item no. **789003**
Ratchet wrench

swepro SW 3003 - This powerful ratchet can be used with high torques up to 82 Nm. The isolated handle fits comfortably in the hand.

BENEFITS / SPECIAL FEATURES:

- ▶ High torque
- ▶ Insulated plastic handle
- ▶ 4-way adjustable setting

TECHNICAL DETAILS:

SPEED	180 1/min
DIMENSION	L: 276 mm
WEIGHT	1.20 kg
SQUARE DRIVE	3/8"
MAX. TORQUE	82 Nm



LEVELS Nm

0	40
1	55
2	70
3	82

SW 5554

Ratchet wrench

(1/2" / 122 Nm)

Item number: **789105**



PRODUCT DESCRIPTION:

swepro SW 5554 - The power of this ratchet wrench is a key feature. With a maximum torque of up to 122 Nm, it lends itself to many work applications. The SW 5554 comprises a sturdy metal housing and its design means it is suitable for continual use. The ratchet wrench can be used easily and safely thanks to the practical lever activation. Extract air is directed forwards.

BENEFITS / SPECIAL FEATURES:

- ▶ High torque
- ▶ Sturdy design

TECHNICAL DETAILS:

SPEED	150 1/min
MAX. TORQUE	122 Nm
DIMENSION	L: 365 mm
WEIGHT	2.00 kg
AIR CONSUMPTION	0.142 m ³ /min
SQUARE DRIVE	1/2"
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	80 dB(A)
VIBRATION	2.5 m/s ²

Accessory:



SW 3340

Mini oiler

Item no.: **782500**

164



SW 2445

2-part maintenance unit

Item no.: **782600**

164





03

Drilling tools

- ▶ Pistol-type drills
 - 117 Keyed chuck
 - 118 Keyless chuck
 - 122 Classics
- ▶ Straight-type drills
- ▶ Angle-type drill

DRILLS

The swepro drill range contains three different variants. The range includes pistol-type drills, different straight-type drills and an angle-type drill. The choice of correct variant must be made based on the application. Our new noise-reduced CDD generation of drills features especially low-noise and vibration-free operation. Thanks to the composite housing, a non-slip, vibration-dampening handle and ergonomic design, this very lightweight and compact device is used in many applications in all sectors of industry.

SELECTION AID

PRODUCT	VARIANT	DRILL CHUCK	SPEED (1/MIN)	PAGE
SW CDD 26	PISTOL	6 MM KEYED CHUCK	2900	117
SW CDD 39	PISTOL	10 MM KEYLESS CHUCK	1600	118
SW CDD 48	PISTOL	10 MM KEYLESS CHUCK	1700	119
SW CDD 58	PISTOL	10 MM KEYLESS CHUCK	750	120
SW CDD 458	PISTOL	13 MM KEYLESS CHUCK	750	121
SW 312K	PISTOL	10 MM KEYLESS CHUCK	2600	122
SW 314F	PISTOL	13 MM KEYED CHUCK	750	123
SW 314K	PISTOL	13 MM KEYLESS CHUCK	750	124
SW 4431	PISTOL	10 MM KEYED CHUCK	1800	125
SW 4431C	PISTOL	10 MM KEYLESS CHUCK	1800	126
SW 4441	PISTOL	13 MM KEYED CHUCK	800	127
SW 4443A	PISTOL	13 MM KEYED CHUCK	400	128
SW 4438	STRAIGHT	10 MM KEYED CHUCK	2600	130
SW 4439	STRAIGHT	10 MM KEYED CHUCK	4500	131
SW 4439C	STRAIGHT	10 MM KEYLESS CHUCK	3600	132
SW 4436	ANGLE	10 MM KEYED CHUCK	1800	133

SW CDD26 Drill

(6 mm keyed chuck / low-noise)

Item number: **786460**

PRODUCT DESCRIPTION:

swepro SW CDD26 - Particularly low-noise and vibration-free operation is a feature of this noise-reduced drill. Thanks to the composite housing, a non-slip, vibration-dampening handle and ergonomic design, this very lightweight and compact device is used in many applications in all sectors of industry. The device has a practical Right/Left switch-over and the ability to attach balancers.

TECHNICAL DETAILS:

SPEED	2900 1/min
TORQUE RANGE	3.5 Nm
DIMENSION	L: 140 mm
WEIGHT	0.58 kg
AIR CONSUMPTION	0.280 m ³ /min
ROTATION DIRECTION	Right-Left
ACTIVATION	Trigger
DRILL CHUCK	6 mm keyed chuck
VIBRATION	0.4 m/s ²
NOISE LEVEL	72 dB(A)
CONNECTOR	1/4" BSPT



< 80 dBA



COMPOSITE



BENEFITS / SPECIAL FEATURES:

- ▶ Low-noise
- ▶ Low weight
- ▶ Rotatable extract air outlet

Alternative:

SW 4431
Drill
10 mm keyed chuck

Item no.
786431



Accessory:

SW 1010

Hose reel

Item no.: **789010**



Conflex

1/4" BSPT

Item no.: **768214**



SW 3340

Mini oiler

Item no.: **782500**



SW 2445

2-part maintenance unit

Item no.: **782600**



SW CDD39 Drill

(10 mm keyless chuck / low-noise)

Item number: **786465**



PRODUCT DESCRIPTION:

swepro SW CDD39 - Particularly low-noise and vibration-free operation is a feature of this noise-reduced drill. Thanks to the composite housing, a non-slip, vibration-dampening handle and ergonomic design, this very lightweight and compact device is used in many applications in all sectors of industry. The device has a practical Right/Left switchover and the ability to attach balancers.

TECHNICAL DETAILS:

SPEED	1600 1/min
TORQUE RANGE	5 Nm
DIMENSION	L: 140 mm
WEIGHT	0.58 kg
AIR CONSUMPTION	0.280 m ³ /min
ROTATION DIRECTION	Right-Left
ACTIVATION	Trigger
DRILL CHUCK	10 mm keyless chuck
VIBRATION	0.9 m/s ²
NOISE LEVEL	72 dB(A)
CONNECTOR	1/4" BSPT


BENEFITS / SPECIAL FEATURES:

- ▶ Noise-reduced
- ▶ Low weight
- ▶ Rotatable extract air outlet


Alternative:


SW CDD48
Drill
10 mm keyless chuck,
low-noise





Item no. **786470** 

Accessory:

SW 1010
Hose reel
Item no.: **789010** 

Conflex
1/4" BSPT
Item no.: **768214** 

SW 3340
Mini oiler
Item no.: **782500** 

SW 2445
2-part maintenance unit
Item no.: **782600** 

SW CDD48 Drill

(10 mm keyless chuck / low-noise)

Item number: **786470**

PRODUCT DESCRIPTION:

swepro SW CDD48 - Particularly low-noise and vibration-free operation is a feature of this noise-reduced drill. Thanks to the composite housing, a non-slip, vibration-dampening handle and ergonomic design, this very light-weight and compact device is used in many applications in all sectors of industry. The device has a practical Right/Left switchover and the ability to attach balancers.



< 80 dBA



COMPOSITE



TECHNICAL DETAILS:

SPEED	1700 1/min
TORQUE RANGE	7 Nm
DIMENSION	L: 160 mm
WEIGHT	0.92 kg
AIR CONSUMPTION	0.550 m ³ /min
ROTATION DIRECTION	Right-Left
ACTIVATION	Trigger
DRILL CHUCK	10 mm keyless chuck
VIBRATION	0.4 m/s ²
NOISE LEVEL	76 dB(A)
CONNECTOR	1/4" BSPT

BENEFITS / SPECIAL FEATURES:

- ▶ Noise-reduced
- ▶ Low weight
- ▶ Rotatable extract air outlet


Alternative:





SW 312K
Drill
10 mm keyless chuck


Item no. **786300** 

Accessory:

SW 1010
Hose reel
Item no.: **789010** 

Conflex
1/4" BSPT
Item no.: **768214** 

SW 3340
Mini oiler
Item no.: **782500** 

SW 2445
Maintenance unit 2-way
Item no.: **782600** 

SW CDD58 Drill

(10 mm keyless chuck / low-noise)

Item number: **786480**



< 80 dBA



COMPOSITE



PRODUCT DESCRIPTION:

swepro SW CDD58 - Particularly low-noise and vibration-free operation is a feature of this noise-reduced drill. Thanks to the composite housing, a non-slip, vibration-dampening handle and ergonomic design, this very lightweight and compact device is used in many applications in all sectors of industry. The device has a practical Right/Left switchover and the ability to attach balancers.

TECHNICAL DETAILS:


SPEED	750 1/min
TORQUE RANGE	13 Nm
DIMENSION	L: 159 mm
WEIGHT	0.92 kg
AIR CONSUMPTION	0.550 m ³ /min
ROTATION DIRECTION	Right-Left
ACTIVATION	Trigger
DRILL CHUCK	10 mm keyless chuck
VIBRATION	0.1 m/s ²
NOISE LEVEL	76 dB(A)
CONNECTOR	1/4" BSPT

BENEFITS / SPECIAL FEATURES:

- ▶ Noise-reduced
- ▶ Low weight
- ▶ Rotatable extract air outlet


Alternative:


SW 4431 C
Drill
10 mm keyless chuck


Item no. **786432** 




Accessory:

SW 1010
Hose reel
Item no.: **789010** 

Conflex
1/4" BSPT
Item no.: **768214** 

SW 3340
Mini oiler
Item no.: **782500** 

SW 2445
2-part maintenance unit
Item no.: **782600** 

SW CDD458 Drill

(13 mm keyless chuck / low-noise)

Item number: **786475**

PRODUCT DESCRIPTION:

swepro SW CDD458 - Particularly low-noise and vibration-free operation is a feature of this noise-reduced drill. Thanks to the composite housing, a non-slip, vibration-dampening handle and ergonomic design, this very lightweight and compact device is used in many applications in all sectors of industry. The device has a practical Right/Left switchover and the ability to attach balancers.

TECHNICAL DETAILS:

SPEED	750 1/min
TORQUE RANGE	13 Nm
DIMENSION	L: 159 mm
WEIGHT	0.92 kg
AIR CONSUMPTION	0.550 m ³ /min
ROTATION DIRECTION	Right-Left
ACTIVATION	Trigger
DRILL CHUCK	13 mm keyless chuck
VIBRATION	0.1 m/s ²
NOISE LEVEL	76 dB(A)
CONNECTOR	1/4" BSPT



< 80 dBA



COMPOSITE



BENEFITS / SPECIAL FEATURES:

- ▶ Noise-reduced
- ▶ Low weight
- ▶ Rotatable extract air outlet

Alternative:



SW 314K
Drill
13 mm keyless chuck

Item no.
786650



Accessory:

SW 1010

Hose reel

Item no.: **789010**



Conflex

1/4" BSPT

Item no.: **768214**



SW 3340

Mini oiler

Item no.: **782500**



SW 2445

2-part maintenance unit

Item no.: **782600**



SW 312K Drill

(10 mm keyless chuck)

Item number: **786300**



PRODUCT DESCRIPTION:

swepro SW 312K - This drill has a practical 10 mm keyless chuck and its very rugged metal housing makes it particularly powerful and durable. It therefore lends itself to many applications in all sectors of industry.

BENEFITS / SPECIAL FEATURES:

- ▶ Stable metal housing
- ▶ Easy to use
- ▶ High speed

TECHNICAL DETAILS:

SPEED	2600 1/min
DIMENSION	L: 190 mm
WEIGHT	0.95 kg
AIR CONSUMPTION	0.480 m ³ /min
ACTIVATION	Trigger
DRILL CHUCK	10 mm keyless chuck
CONNECTOR	1/4" BSPT

Alternative:

SW 4431C
Drill
10 mm keyless chuck



Item no.
786432



Accessory:

SW 1010
Hose reel

Item no.: **789010**



Conflex
1/4" BSPT

Item no.: **768214**



SW 3340
Mini oiler

Item no.: **782500**



SW 2445

2-part maintenance unit

Item no.: **782600**



SW 314F Drill

(13 mm keyed chuck)

Item number: **786600**

PRODUCT DESCRIPTION:

swepro SW 314F - This drill has a 13 mm keyed chuck and its very rugged metal housing makes it particularly powerful and durable. It therefore lends itself to many applications in all sectors of industry. The SW 314F can be operated with one hand because the practical Right/Left switch-over is on the handle next to the activator. An additional handle included in the delivery enables simple and safe operation of the drill.

BENEFITS / SPECIAL FEATURES:

- ▶ Stable metal housing
- ▶ Easy to use
- ▶ Powerful


TECHNICAL DETAILS:

SPEED	750 1/min
DIMENSION	L: 235 mm
WEIGHT	1.95 kg
AIR CONSUMPTION	0.480 m ³ /min
ACTIVATION	Trigger
DRILL CHUCK	13 mm keyed chuck
CONNECTOR	1/4" BSPT




Alternative:


SW 4441
Drill
13 mm keyed chuck


Item no. **786441** 




Accessory:

SW 1010
Hose reel
Item no.: **789010** 

Conflex
1/4" BSPT
Item no.: **768214** 

SW 3340
Mini oiler
Item no.: **782500** 

SW 2445
2-part maintenance unit
Item no.: **782600** 

SW 314K Drill

(13 mm keyless chuck)

Item number: **786650**



PRODUCT DESCRIPTION:

swepro SW 314K - This drill has a 13 mm keyless chuck and its very rugged metal housing makes it particularly powerful and durable. It therefore lends itself to many applications in all sectors of industry. The SW 314K can be operated with one hand because the practical Right/Left switchover is on the handle next to the activator. An additional handle included in the delivery enables simple and safe operation of the drill.

BENEFITS / SPECIAL FEATURES:

- ▶ Stable metal housing
- ▶ Easy to use
- ▶ Powerful

TECHNICAL DETAILS:

SPEED	750 1/min
DIMENSION	L: 235 mm
WEIGHT	1.95 kg
AIR CONSUMPTION	0.480 m ³ /min
ACTIVATION	Trigger
ROTATION DIRECTION	Right-Left
DRILL CHUCK	13 mm keyless chuck
CONNECTOR	1/4" BSPT

Alternative:

SW CDD 458
Drill
13 mm keyless chuck

Item no.
786475



Accessory:

SW 1010
Hose reel

Item no.: **789010**



Conflex
1/4" BSPT

Item no.: **768214**



SW 3340
Mini oiler

Item no.: **782500**



SW 2445

2-part maintenance unit

Item no.: **782600**



SW 4431

Drill

(10 mm keyed chuck)

Item number: **786431**

PRODUCT DESCRIPTION:

swepro SW 4431 - This drill has a 10 mm toothed ring chuck, is very powerful and its metal housing makes it weight-reduced. A pleasant soft- silicone handle ensures safe operation of the drill. The practical Right/ Left switchover is on the handle right next to the activator, and so the drill can be operated with one hand. The SW 4431 lends itself very well to many applications in all sectors of industry.

BENEFITS / SPECIAL FEATURES:

- ▶ Stable metal housing
- ▶ Easy to use
- ▶ High speed
- ▶ Soft-silicone handle

TECHNICAL DETAILS:

SPEED	1800 1/min
DIMENSION	L: 180 mm
WEIGHT	0.90 kg
AIR CONSUMPTION	0.170 m ³ /min
ACTIVATION	Trigger
ROTATION DIRECTION	Right-Left
DRILL CHUCK	10 mm keyed chuck
VIBRATION	0.2 m/s ²
NOISE LEVEL	92 dB(A)
CONNECTOR	1/4" BSPT



Alternative:

SW CDD39

Drill
10 mm keyless chuck,
low-noise

Item no.
786465



Accessory:

SW 1010

Hose reel

Item no.: **789010**



Conflex

1/4" BSPT

Item no.: **768214**



SW 3340

Mini oiler

Item no.: **782500**



SW 2445

2-part maintenance unit

Item no.: **782600**



SW 4431C Drill

(10 mm keyless chuck)

Item number: **786432**



PRODUCT DESCRIPTION:

swepro SW 4431C - This drill has a 10 mm keyless chuck, is very powerful and its metal housing means it is weight-reduced. A pleasant soft-silicone handle ensures safe operation of the drill. The practical Right/Left switchover is on the handle right next to the activator, and so the drill can be operated with one hand. The SW 4431C lends itself to many applications in all sectors of industry.

BENEFITS / SPECIAL FEATURES:

- ▶ Stable metal housing
- ▶ Easy to use
- ▶ High speed

TECHNICAL DETAILS:

SPEED	1800 1/min
DIMENSION	L: 180 mm
WEIGHT	0.90 kg
AIR CONSUMPTION	0.170 m ³ /min
ACTIVATION	Trigger
ROTATION DIRECTION	Right-Left
DRILL CHUCK	10 mm keyless chuck
VIBRATION	0.2 m/s ²
NOISE LEVEL	92 dB(A)
CONNECTOR	1/4" BSPT

Alternative:

SW CDD48

Drill
10 mm keyless chuck,
low-noise

Item no. **786470**



Accessory:

SW 1010

Hose reel

Item no.: **789010**



Conflex

1/4" BSPT

Item no.: **768214**



SW 3340

Mini oiler

Item no.: **782500**



SW 2445

2-part maintenance unit

Item no.: **782600**



SW 4441

Drill

(13 mm keyed chuck)

Item number: **786441**

PRODUCT DESCRIPTION:

swepro SW 4441 - This drill has a 13 mm keyed chuck, is very powerful and its metal housing means it is weight-reduced. A pleasant soft-silicone handle ensures safe operation of the drill. The practical Right/Left switchover is on the handle right next to the activator, and so the drill can be operated with one hand. The SW 4441 lends itself to many applications in all sectors of industry.

BENEFITS / SPECIAL FEATURES:

- ▶ Stable metal housing
- ▶ Easy to use
- ▶ Powerful
- ▶ Soft-silicone handle


TECHNICAL DETAILS:


SPEED	800 1/min
WEIGHT	0.90 kg
AIR CONSUMPTION	0.170 m ³ /min
DIMENSION	L: 180 mm
ROTATION DIRECTION	Right-Left
DRILL CHUCK	13 mm keyed chuck
ACTIVATION	Trigger
NOISE LEVEL	88 dB(A)
VIBRATION	0.2 m/s ²
CONNECTOR	1/4" BSPT



Alternative:

SW 4443A
Drill
13 mm keyed chuck

Item no. **786450** 

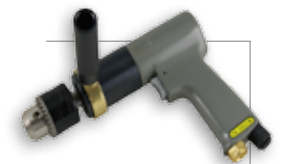

Accessory:

SW 1010

Hose reel

Item no.: **789010**



Conflex

1/4" BSPT

Item no.: **768214**



SW 3340

Mini oiler

Item no.: **782500**



SW 2445

2-part maintenance unit

Item no.: **782600**



SW4443A

High-performance drill

(13 mm keyed chuck)

Item number: **786450**



< 80 dBA

PRODUCT DESCRIPTION:

swepro SW 4443A - This drill has a 13 mm keyed chuck, is powerful and has a rugged metal housing. Because of its low speed of 400 rpm, the drill is ideal for drilling into hard materials and for mixing paints and varnishes. The SW 4443A lends itself to continual operation in industrial applications.

BENEFITS / SPECIAL FEATURES:

- ▶ Very stable
- ▶ Easy to use
- ▶ Very powerful
- ▶ Low noise level

TECHNICAL DETAILS:

SPEED	400 1/min
DIMENSION	L: 180 mm
WEIGHT	1.80 kg
AIR CONSUMPTION	0.170 m ³ /min
DRILL CHUCK	13 mm keyed chuck
ACTIVATION	Trigger
NOISE LEVEL	76 dB(A)
VIBRATION	0.3 m/s ²
CONNECTOR	1/4" BSPT

Alternative:

SW CDD458

Drill
13 mm keyless chuck,
low-noise

Item no.
786475



Accessory:

SW 1010

Hose reel

Item no.: **789010**



Conflex

1/4" BSPT

Item no.: **768214**



SW 3340

Mini oiler

Item no.: **782500**



SW 2445

2-part maintenance unit

Item no.: **782600**





SW4438

Straight-type drill

(10 mm keyed chuck)

Item number: **786438**



PRODUCT DESCRIPTION:

swepro SW 4438 - This powerful straight-type drill has a speed of 2600 1/min and a 10 mm keyed chuck. The SW 4438 has a sturdy, lightweight metal housing and can be operated with one hand using the lever activation. The range of uses and applications for swepro straight-type drills is very diverse - e.g. drilling, polishing, mixing of paints and varnishes, and working with wire brushes. The multi-faceted straight-type drills therefore lend themselves to many applications in all sectors of industry.

TECHNICAL DETAILS:

SPEED	2600 1/min
DIMENSION	L: 203 mm
WEIGHT	0.90 kg
AIR CONSUMPTION	0.170 m ³ /min
ACTIVATION	Lever
DRILL CHUCK	10 mm keyed chuck
NOISE LEVEL	92 dB(A)
VIBRATION	0.6 m/s ²
CONNECTOR	1/4" BSPT

BENEFITS / SPECIAL FEATURES:

- ▶ Stable metal housing
- ▶ Easy to use
- ▶ Safety locking mechanism on lever
- ▶ High speed


Alternative:


SW 4439C
Straight-type drill
10 mm keyless chuck


Item no. **786435** 




Accessory:

SW 1010
Hose reel
Item no.: **789010** 

Conflex
1/4" BSPT
Item no.: **768214** 

SW 3340
Mini oiler
Item no.: **782500** 

SW 2445
2-part maintenance unit
Item no.: **782600** 

SW4439

Straight-type drill

(10 mm keyed chuck)

Item number: **786439**

PRODUCT DESCRIPTION:

swepro SW 4439 - This powerful straight-type drill has a speed of 4500 1/min and a 10 mm keyed chuck. The SW 4439 has a sturdy, lightweight metal housing and can be operated with one hand using the lever activation. The range of uses and applications for swepro straight-type drills is diverse - e.g. drilling, polishing, mixing paints and varnishes, and working with wire brushes. The multi-faceted straight-type drills therefore lend themselves to many applications in all sectors of industry.

BENEFITS / SPECIAL FEATURES:

- ▶ Stable metal housing
- ▶ Easy to use
- ▶ Safety locking mechanism on lever
- ▶ High speed

TECHNICAL DETAILS:

SPEED	4500 1/min
DIMENSION	L: 190 mm
WEIGHT	0.90 kg
AIR CONSUMPTION	0.170 m ³ /min
ACTIVATION	Lever
DRILL CHUCK	10 mm keyed chuck
NOISE LEVEL	85 dB(A)
VIBRATION	0.6 m/s ²
CONNECTOR	1/4" BSPT



Alternative:

SW 4439C
Straight-type drill
10 mm keyless chuck

Item no.
786435



Accessory:

SW 1010

Hose reel

Item no.: **789010**



Conflex

1/4" BSPT

Item no.: **768214**



SW 3340

Mini oiler

Item no.: **782500**



SW 2445

2-part maintenance unit

Item no.: **782600**



SW4439C

Straight-type drill

(10 mm keyless chuck)

Item number: **786435**



PRODUCT DESCRIPTION:

swepro SW 4439C - This powerful straight-type drill has a speed of 3600 1/min and a 10 mm keyless chuck. The SW 4439C has a sturdy, lightweight metal housing and can be operated with one hand using the lever activation. The range of uses and applications for swepro straight-type drills includes for example drilling, polishing, mixing of paints and varnishes, and working with wire brushes.

BENEFITS / SPECIAL FEATURES:

- ▶ Stable metal housing
- ▶ Easy to use
- ▶ Low compressed air consumption
- ▶ High speed

TECHNICAL DETAILS:

SPEED	3600 1/min
DIMENSION	L: 225 mm
WEIGHT	0.85 kg
AIR CONSUMPTION	0.090 m ³ /min
ACTIVATION	Lever
DRILL CHUCK	10 mm keyless chuck
NOISE LEVEL	91 dB(A)
VIBRATION	0.3 m/s ²
CONNECTOR	1/4" BSPT

Alternative:

SW 4439
Straight-type drill
10 mm keyed chuck

Item no.
786439



Accessory:

SW 1010
Hose reel

Item no.: **789010**



Conflex
1/4" BSPT

Item no.: **768214**



SW 3340
Mini oiler

Item no.: **782500**



SW 2445
2-part maintenance unit

Item no.: **782600**



SW4436

Angle-type drill

(10 mm keyed chuck)

Item number: **786436**



PRODUCT DESCRIPTION:

swepro SW 4436 - The SW 4436 angle-type drill is extremely easy to handle. This is due not only to the compact design but also to the 90° angle position of the drill - making it possible to work in poorly accessible and enclosed spaces with a high level of precision. The angle-type drill has a Right/Left switchover and the 10 mm keyed chuck can be changed using the drill chuck key.

BENEFITS / SPECIAL FEATURES:

- ▶ Stable metal housing
- ▶ Easy to use
- ▶ High speed

TECHNICAL DETAILS:

SPEED	1800 1/min
DIMENSION	L: 180 mm
WEIGHT	1.80 kg
AIR CONSUMPTION	0.170 m ³ /min
ACTIVATION	Lever
DRILL CHUCK	10 mm keyed chuck
NOISE LEVEL	92 dB(A)
VIBRATION	0.7 m/s ²
CONNECTOR	1/4" BSPT

Accessory:

SW 1010

Hose reel

Item no.: **789010**



Conflex

1/4" BSPT

Item no.: **768214**



SW 3340

Mini oiler

Item no.: **782500**




SW 2445

2-part maintenance unit

Item no.: **782600**



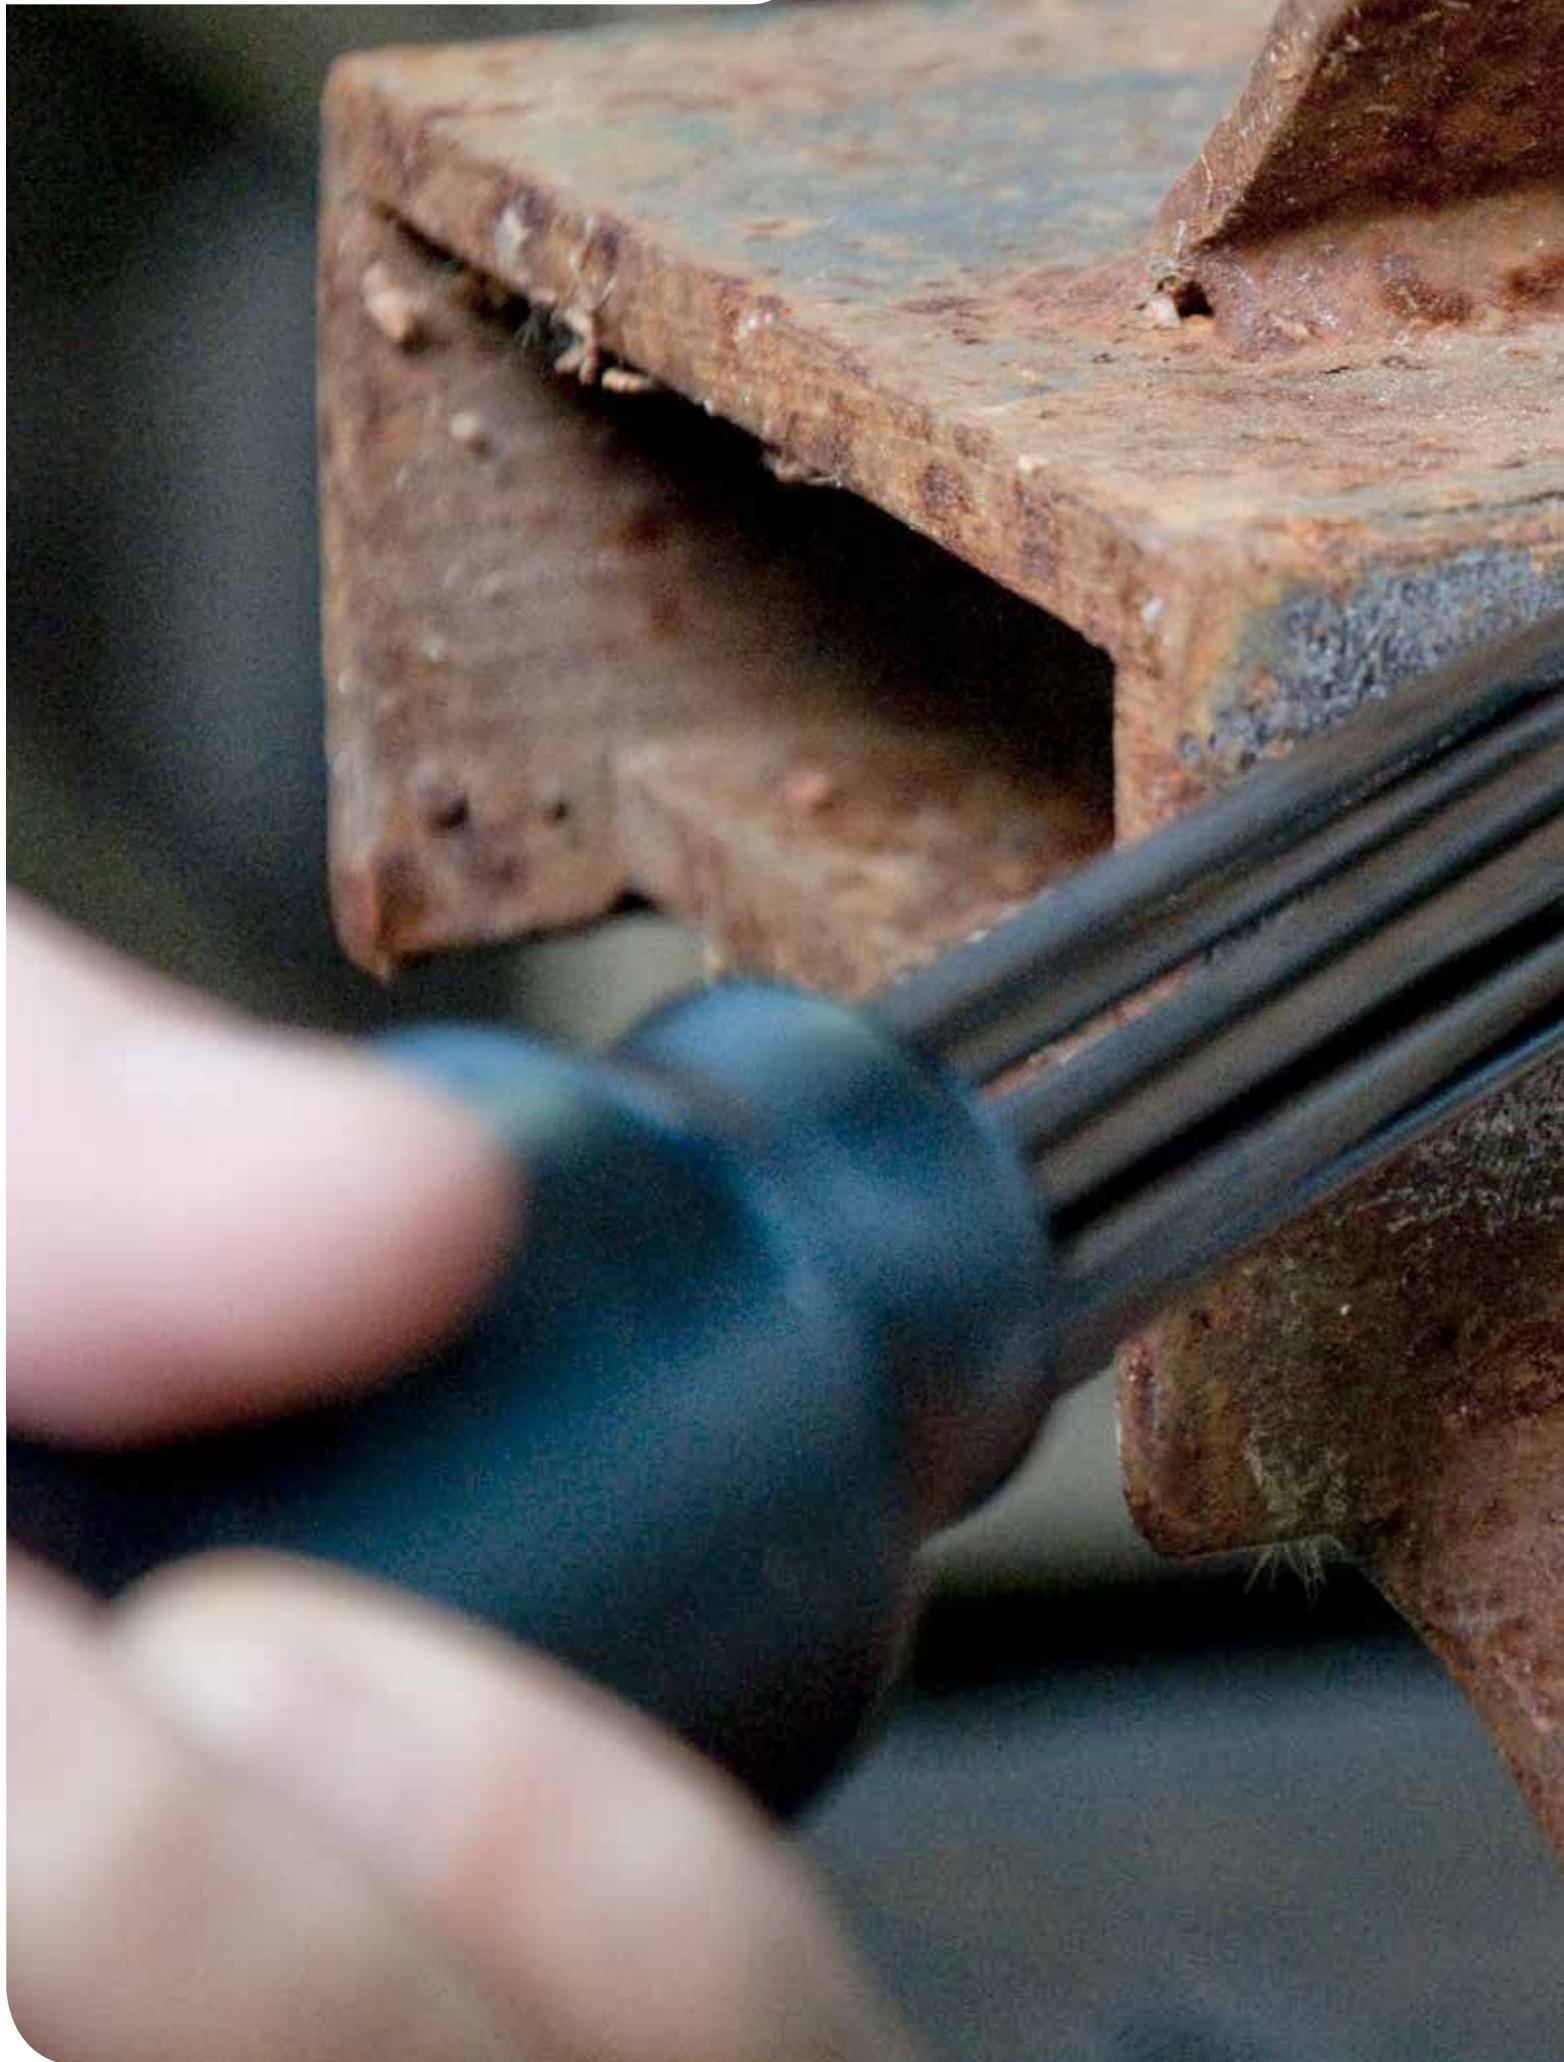



04

Percussive tools

- ▶ Flux chippers
- ▶ Needle scalers

FLUX CHIPPERS

swepro flux chippers are available as two different variants. In addition to the practical SW 2552 piston-type flux chipper, we also offer two straight-type flux chippers. All flux chippers lend themselves to industrial use, such as for chipping off gypsum and concrete remains, and removing slag and welding splatters. The practical lever activation means the handy flux chippers are very easy to use.

SW 2552

Pistol-type flux chipper

(Piston stroke 23.5 x 20 x 73 mm)

Item number: **789320**

PRODUCT DESCRIPTION:

swepro SW2552 - The pistol-type flux chipper lends itself to industrial use, such as for chipping off gypsum and concrete remains, and removing slag and welding splatters. The practical lever activation makes the handy pistol-type flux chipper easy to use. A 35 mm wide bit with 4-edge adaptor is included with the delivery. Other replacement bits are available from us on request.



BENEFITS / SPECIAL FEATURES:

- ▶ Rugged metal housing prolongs service life
- ▶ Ergonomic pistol shape

TECHNICAL DETAILS:

IMPACT FREQUENCY	2700 1/min
BIT ADAPTER	Square
PISTON STROKE	23.5 x 20 x 73 mm
AIR CONSUMPTION	0.285 m ³ /min
WEIGHT	2.60 kg
DIMENSION	L: 295 mm
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	92 dB(A)
VIBRATION	23.6 m/s ²

Alternative:



SW 2557F

Flux chipper
Practical straight shape
High impact frequency

Item no.
789310



Accessory:

Moil chisel	Replacement chisel	Replacement chisel	Replacement chisel
	20 mm, flat	35 mm, bent	50 mm, bent
Item no.: 789324	Item no.: 789325	Item no.: 789326	Item no.: 789328

SW 2557F

Flux chipper

(Piston stroke 25 x 50 x 50.5 mm)

Item number: **789310**



PRODUCT DESCRIPTION:

swepro SW 2557F - The flux chipper lends itself to industrial use, such as for chipping off gypsum and concrete remains, and removing slag and welding splatters. The practical lever activation means the handy 420 mm long straight-type flux chipper is very easy to use.

BENEFITS / SPECIAL FEATURES:

- ▶ Rugged metal housing prolongs service life
- ▶ Replacement bits available (4-edge adaptor)

TECHNICAL DETAILS:

IMPACT FREQUENCY	5000 1/min
BIT ADAPTER	Square
PISTON STROKE	25 x 50 x 50.5 mm
AIR CONSUMPTION	0.285 m ³ /min
WEIGHT	1.60 kg
DIMENSION	L: 320 mm
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	98 dB(A)
VIBRATION	31.0 m/s ²

Alternative:

SW 2558F

Air Flux Chipper

Item no.
789300

swepro SW 2558F - The Air Flux Chipper is well suited for knocking gypsum, concrete residues, removing slag and welding spatter.

BENEFITS / SPECIAL FEATURES:

- ▶ Rugged metal housing prolongs service life
- ▶ Light, practical & very low air consumption

TECHNICAL DETAILS:

IMPACT FREQUENCY	4800 1/min
BIT ADAPTOR	Circular
PISTON STROKE	18 x 14 x 47 mm
AIR CONSUMPTION	0.085 m ³ /min
WEIGHT	1.10 kg
DIMENSION	L: 235 mm
ACTIVATION	Lever
CONNECTOR	1/4" BSPT



SW 2200AH Flux Chipper

Item no. **789312**

PRODUCT DESCRIPTION:

swepro SW 2200AH - The rugged hammer is suitable for industrial use. With the convenient release lever and its straight design allows this handy hammer also very easy to operate with two hands.

BENEFITS / SPECIAL FEATURES:

- ▶ High performance
- ▶ Lever release

Accessory:

Replacement chisel
30 mm, flat

Item no.
789331



TECHNICAL DETAILS:

SPEED	3000 1/min
DIMENSION	L: 243 mm
WEIGHT	2.60 kg
AIR CONSUMPTION	0.400 m ³ /min
CONNECTOR	1/4" BSPT
NOSIE LEVEL	92 dB(A)
VIBRATION	13.2 m/s ²
PERFORMANCE	9.5 Joule
ACTIVATION	Lever

SW 2202H Flux Chipper

Item number: **789311**

PRODUCT DESCRIPTION:

swepro SW 2202H - The rugged hammer is suitable for industrial use. With the convenient release lever and its straight design allows this handy hammer also very easy to operate with two hands.

BENEFITS / SPECIAL FEATURES:

- ▶ High performance
- ▶ Lever release

Accessory:

Replacement chisel
Sharp

Item no.
789332



TECHNICAL DETAILS:

SPEED	2400 1/min
DIMENSION	L: 327 mm
WEIGHT	5.90 kg
AIR CONSUMPTION	0.600 m ³ /min
CONNECTOR	3/8" BSPT
NOSIE LEVEL	102 dB(A)
VIBRATION	13.75 m/s ²
PERFORMANCE	27.3 Joule
ACTIVATION	Lever

NEEDLE SCALERS

swepro needle scalers are available as two different variants. The straight-type needle scaler and the pistol-type needle scaler are the perfect tools for removing coatings from solid metal parts. These powerful yet handy tools are very effective in removing rust from solid metal parts and iron girders, such as on ships and in the maintenance of goods wagons. The chipping off of welding cinder, paint, plastering and concrete represent other uses of swepro needle scalers. All needle scalers have practical and easy-to-use lever activation.



SW 2275

Straight-type needle scaler

Item number: **789142**

PRODUCT DESCRIPTION:

swepro SW 2275 - The straight-type needle scaler is the perfect tool for removing coatings from solid metal parts. This powerful and handy tool is very effective in removing rust from solid frame parts and iron girders. The SW 2275 also lends itself to the chipping off of welding cinder, paint, plastering and concrete. The practical lever activation means the handy 410 mm long straight-type needle scaler is very easy to use.

BENEFITS / SPECIAL FEATURES:

- ▶ Rugged metal housing prolongs service life
- ▶ 19 needles (Ø 3 mm x 180 mm)

TECHNICAL DETAILS:

IMPACT FREQUENCY	4000 1/min
AIR CONSUMPTION	0.250 m ³ /min
WEIGHT	2.50 kg
DIMENSION	L: 410 mm
ACTIVATION	Lever
NOISE LEVEL	92 dB(A)
VIBRATION	20.7 m/s ²
NEEDLE SIZE	Ø 3 mm x 180 mm
NO. OF NEEDLES	19
CONNECTOR	1/4" BSPT



Alternative:

SW 2558

Straight-type needle scaler
Light & handy design
Low air consumption

Item no.
789230



Accessory:

Replacement needles
for SW 2275 needle scaler

Item no.
800006

SW 2558

Straight-type needle scaler

Item number: **789230**



PRODUCT DESCRIPTION:

swepro SW 2558 - The straight-type needle scaler is the perfect tool for removing coatings from solid metal parts. This powerful yet handy tool is very effective for example in removing rust from solid frame parts and iron fences. The SW 2558 also lends itself to the chipping off of welding cinder, paint, plastering and concrete. The practical lever activation means the handy 290 mm long straight-type needle scaler is very easy to use.

BENEFITS / SPECIAL FEATURES:

- ▶ Rugged metal housing prolongs service life
- ▶ Very low air consumption
- ▶ Short and light design

Alternative:

SW 2275

Straight-type needle scaler
Rugged design for larger areas

Item no.
789142



TECHNICAL DETAILS:

IMPACT FREQUENCY	5500 1/min
AIR CONSUMPTION	0.085 m ³ /min
WEIGHT	1.30 kg
DIMENSIONS	L: 290 mm
ACTIVATION	Lever
NEEDLE SIZE	Ø 3 mm x 125 mm
NO. OF NEEDLES	12
CONNECTOR	1/4" BSPT
NOISE LEVEL	94 dB(A)
VIBRATION	10.5 m/s ²

Accessory:

Replacement needles

For SW 2558 needle scaler

Item no.
800138

SW 2555

Pistol-type needle scaler

Item number: **789220**

PRODUCT DESCRIPTION:

swepro SW 2555 - The pistol-type needle scaler is the perfect tool for removing coatings from solid metal parts. This powerful yet handy tool is very effective for example in removing rust from solid frame parts and iron fences. The SW 2555 also lends itself to the chipping off of welding cinder, paint, plastering and concrete. The practical lever activation makes it very easy to use.



BENEFITS / SPECIAL FEATURES:

- ▶ Rugged metal housing prolongs service life
- ▶ Ergonomic pistol shape

TECHNICAL DETAILS:

IMPACT FREQUENCY	3700 1/min
AIR CONSUMPTION	0.285 m ³ /min
WEIGHT	2.70 kg
DIMENSIONS	L: 330 mm
ACTIVATION	Lever
NEEDLE SIZE	Ø 3 mm x 180 mm
NO. OF NEEDLES	19
CONNECTOR	1/4" BSPT
NOISE LEVEL	99 dB(A)
VIBRATION	13.0 m/s ²

Alternative:

SW 2561

Pistol-type needle scaler
Rugged design with
3/8" air connector

Item no.
789210



Accessory:

Conflex

1/4" BSPT, enables
more flexible working

Item no.
768214



SW 2561

Pistol-type needle scaler

Item number: **789210**



PRODUCT DESCRIPTION:

swepro SW 2561 - The pistol-type needle scaler is the perfect tool for removing coatings from solid metal parts. This powerful yet handy tool is very effective for example in removing rust from solid frame parts and metal girders. The SW 2561 also lends itself to the chipping off of welding cinder, paint, plastering and concrete. The practical lever activation makes it very easy to use.

BENEFITS / SPECIAL FEATURES:

- ▶ Rugged metal housing prolongs service life
- ▶ Ergonomic pistol shape

TECHNICAL DETAILS:

IMPACT FREQUENCY	4000 1/min
AIR CONSUMPTION	0.285 m ³ /min
WEIGHT	2.80 kg
DIMENSIONS	L: 335 mm
ACTIVATION	Lever
NEEDLE SIZE	Ø 3 mm x 180 mm
NO. OF NEEDLES	23
CONNECTOR	3/8" BSPT
NOISE LEVEL	96 dB(A)
VIBRATION	12.9 m/s ²

Alternative:

SW 2555

Pistol-type needle scaler narrower design with 1/4" air connector

Item no.
789220



Accessory:

Replacement needles

for pistol-type needle scalars SW 2561

Item no.
800005







05

Files & saws

- ▶ Files
- ▶ Saws

FILES

The swepro range of files includes three industrial files that are particularly light and durable, have a very high level of workmanship and are easy in the hand. The swepro files are suitable for filing applications such as deburring and removal of weld spatters. The stroke frequency is model-dependent and is 35000 1/min, 12000 1/min or 10000 1/min, and the stroke length is 1 - 2 mm, 3 - 5 mm or 7 - 10 mm.

SAWS

The swepro SW 6600, 6612 and 66002 saws, with a stroke frequency between 5000 and 10000 1/min, are perfect for bodywork and sheet metalworking. Saw blades with 18, 24 and 32 teeth are included in the delivery. The SW66002 is also vibration-reduced and very easy to use thanks to the swivel joint on the air connector. Both saws have an adjustable stop bar for checking of the cut depth. This enables it to be aligned smoothly to your technical requirements. Their stroke frequency means the saws also work easily and safely when cutting complicated shapes out of all types of synthetics, fibre glass, composites, aluminium and sheet metal.

SW 1183

File

(stroke frequency 35000 1/min)

Item number **789182**

PRODUCT DESCRIPTION:


swepro SW 1183 – The industry file is particularly light and durable, has a very high quality machined aluminium housing and is easy to use with practical rotating activation. The stroke frequency is 35000 and the stroke length 1 - 2 mm. The rearwards extract air hose means there is no turbulence where the file is being used.

BENEFITS / SPECIAL FEATURES:

- ▶ Very light aluminium housing
- ▶ Durable
- ▶ Simple to use
- ▶ Noise-dampened connection nipple included

TECHNICAL DETAILS:

DIMENSION	L: 170 mm
WEIGHT	0.24 kg
AIR CONSUMPTION	0.220 m ³ /min
TRIGGER	Control dial
STROKE FREQUENCY	35000 1/min
STROKE LENGTH	1 - 2 mm
CONNECTOR	1/4" BSPT

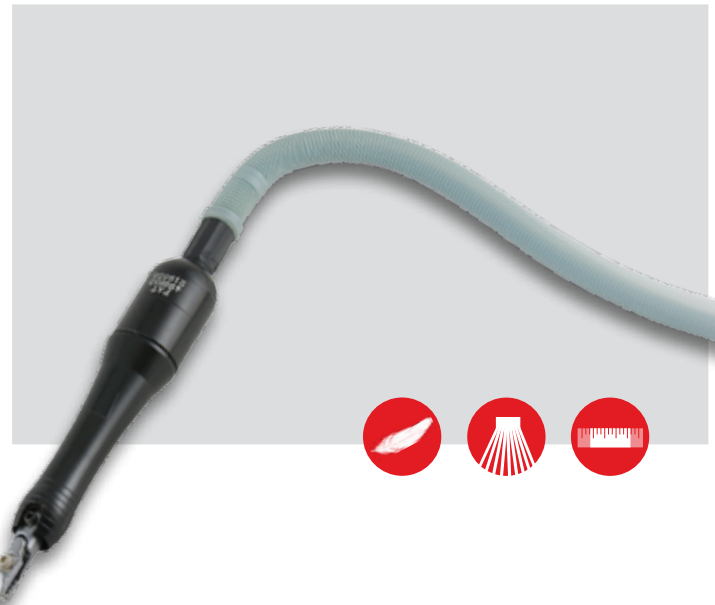

Alternative:

SW 66012
File

Item no.
789170



Accessory:

SW 1010
Hose reel
Item no.: **789010**



SW 3340
Mini oiler
Item no.: **782500**



SW 66012 File

(stroke frequency 12000 1/min)

Item number: **789170**



PRODUCT DESCRIPTION:

swepro SW 66012 - The industry file is particularly light and durable, has a very high level of workmanship and is easy to use with practical rotating activation. The file lends itself to all file applications and comes with appropriate file blades. The stroke frequency is 12000 and the stroke length 3 - 5 mm.

BENEFITS / SPECIAL FEATURES:

- ▶ Light
- ▶ Durable
- ▶ Simple to use

TECHNICAL DETAILS:

DIMENSION	L: 250 mm
WEIGHT	0.60 kg
AIR CONSUMPTION	0.170 m ³ /min
ACTIVATION	Control dial
STROKE FREQUENCY	12000 1/min
STROKE LENGTH	3 - 5 mm
NOISE LEVEL	82 dB(A)
VIBRATION	<4 m/s ²
CONNECTOR	1/4" BSPT

Alternative:

SW 1183
File

Item no.
789182



Accessory:

File blade
Rectangular
Item no.: **789186**

File blade
Circular
Item no.: **789187**

File blade
Semi-circular
Item no.: **789188**

File blade
Triangular
Item no.: **789189**

SW 66013

File

(stroke frequency 10000 1/min / low-noise)

Item number **789175**

PRODUCT DESCRIPTION:

swepro SW 66013 - The industry file is particularly light and durable, has a very high level of workmanship and is easy to use with practical rotating activation. The file lends itself to all file applications and comes with appropriate file blades. The stroke frequency is 10000 and the stroke length 7 - 10 mm.

BENEFITS / SPECIAL FEATURES:

- ▶ Sturdy design
- ▶ Noise-reduced
- ▶ Durable
- ▶ Simple to use

TECHNICAL DETAILS:

DIMENSION	L: 250 mm
WEIGHT	0.75 kg
AIR CONSUMPTION	0.170 m ³ /min
ACTIVATION	Control dial
STROKE FREQUENCY	10000 1/min
STROKE LENGTH	7 - 10 mm
NOISE LEVEL	79 dB(A)
VIBRATION	<4 m/s ²
CONNECTOR	1/4" BSPT



< 80 dBA



Alternative:

SW 66012
File

Item no.
789170



Accessory:

File blade

Rectangular

Item no.: **789186**

File blade

Circular

Item no.: **789187**

File blade

Semi-circular

Item no.: **789188**

File blade

Triangular

Item no.: **789189**

SW 66002 Saw

(stroke frequency 9500 1/min / low-vibration)

Item number: **789602**



PRODUCT DESCRIPTION:

swepro SW 66002 - The low-vibration saw is suitable for many applications. With a stroke frequency of 9500 1/min, it is ideal for bodywork and sheet metalworking for example. The SW 66002 is very easy to use thanks to the 360° swivel joint on the supply air connector. Saw blades with 18, 24 and 32 teeth are included in the delivery. An adjustable spacer bar is provided to aid safe operation.

BENEFITS / SPECIAL FEATURES:

- ▶ Low-vibration
- ▶ Sturdy design
- ▶ Versatile deployment
- ▶ Swivel joint on the air connector for improved operation


TECHNICAL DETAILS:

DIMENSIONS	L: 238 mm
WEIGHT	0.72 kg
AIR CONSUMPTION	0.170 m ³ /min
STROKE FREQUENCY	9500 1/min
STROKE LENGTH	10 mm
CUTTING PERFORMANCE	3 mm (steel)
ACTIVATION	Lever
NOISE LEVEL	83 dB(A)
VIBRATION	1.8 m/s ²
CONNECTOR	1/4" BSPT

Alternative:

SW 6620
Plate shears



Item no.
789620  159

Accessory:

Saw blade
32 teeth

Item no.: **789608**

Saw blade
24 teeth

Item no.: **789607**

Saw blade
18 teeth

Item no.: **789606**

SW 6612

Saw

(stroke frequency 10000 1/min)

Item number **789612**

PRODUCT DESCRIPTION:


The swepro SW 6612 is a rugged saw suitable for many applications. With a stroke frequency of 10000 1/min, it is ideal for bodywork and sheet metalworking for example. Saw blades with 18, 24 and 32 teeth are included in the delivery. The SW 6612 has an adjustable safety bar to aid safe operation. A rearwards discharge air hose means there is no turbulence where the saw is used.

BENEFITS / SPECIAL FEATURES:

- ▶ Sturdy design
- ▶ Extract air hose
- ▶ Versatile deployment

TECHNICAL DETAILS:

DIMENSION	L: 235 mm
WEIGHT	0.63 kg
AIR CONSUMPTION	0.184 m ³ /min
STROKE FREQUENCY	10000 1/min
STROKE LENGTH	10 mm
CUTTING PERFORMANCE	3 mm (steel)
ACTIVATION	Lever
NOISE LEVEL	83 dB(A)
VIBRATION	6.9 m/s ²
CONNECTOR	1/4" BSPT

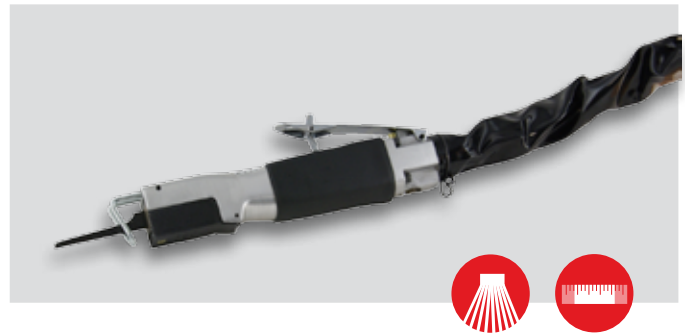

Alternative:

SW 6600 Item no. **789660**
Saw & file

(Low vibration / Stroke frequency: 5000 1/min)

swepro SW 6600 - Its a combined saw and file tool and suitable for many applications.

NEW!

BENEFITS / SPECIAL FEATURES:

- ▶ Low vibration
- ▶ Two functions: saw and file
- ▶ Adujustable safety bar

TECHNICAL DETAILS:

SPEED	5000 1/min
WEIGHT	1.35 kg
AIR CONSUMPTION	0.240 m ³ /min
MAX. OPERATING PRESSURE	6.3 bar
ACTIVATION	lever
VIBRATION	2.6 m/s ²

The following tools complete the tool range from swepro. Nippers, nibblers and plate shears are ideal for cutting and clipping steel, aluminium and synthetics with different material thicknesses. The low-vibration engraving pen is ideal for delicate engraving work on a broad diversity of application surfaces such as steel, glass, ceramics and plastics. Four riveting guns suitable for industrial use compliment the product portfolio.





06

Other tools

- ▶ Engraving pen
- ▶ Nibbler and nipper
- ▶ Plate shear
- ▶ Riveting guns

SW G400

Engraving pen

(stroke frequency 21000 1/min, low-vibration)

Item number: **783100**



<80 dBA

PRODUCT DESCRIPTION:

swepro SW G-400 - The engraving pen features an innovative, active vibration dampening system. This highly advanced engraving pen has up to 80-90% less vibration compared to conventional engraving pens, even when working with harder materials. The high stroke frequency and low vibration level ensure excellent results on steel, non-ferrous metals, glass, ceramics and plastic.

BENEFITS / SPECIAL FEATURES:

- ▶ Low air consumption
- ▶ Very practical
- ▶ Low vibration level

TECHNICAL DETAILS:

DIMENSION	L: 140 mm
WEIGHT	0.15 kg
AIR CONSUMPTION	0.030 m ³ /min
STROKE FREQUENCY	21000 / minute
TRIGGER	Control dial
NOISE LEVEL	78 dB(A)
VIBRATION	1.0 m/s ²
CONNECTOR	1/4" BSPT

Alternative:

SW G500

Engraving pen
Engraving for hard surfaces
More coarse application

Item no.
783150



NEW!



Accessory:

SW 1010

Hose reel

Item no.: **789010**



SW 3340

Mini oiler

Item no.: **782500**



SW 6625

Nibbler

Item number: **789630**

PRODUCT DESCRIPTION:

swepro SW 6625 - The pneumatic, professional nibbler effortlessly cuts steel and aluminium up to thicknesses of 1.7 mm and 1.4 mm respectively. The nibbler has an angled head and is therefore perfect for all bodywork and sheet metalworking, and lends itself particularly well to cutting around corners and in straight lines. The practical lever activation enables effortless working with one hand.

BENEFITS / SPECIAL FEATURES:

- ▶ Sturdy design
- ▶ Simple to use

TECHNICAL DETAILS:

DIMENSION	L: 120 mm
WEIGHT	0.95 kg
AIR CONSUMPTION	0.170 m ³ /min
SPEED	2900 1/min
CUTTING PERFORMANCE	Steel to 1.7 mm / Aluminium to 1.4 mm
ACTIVATION	Lever
NOISE LEVEL	85 dB(A)
VIBRATION	3.8 m/s ²
CONNECTOR	1/4" BSPT



Alternative:

SW 66002

Saw
Low-vibration

Item no.
789602 



Accessory:

SW 1010

Hose reel

Item no.: **789010** 

SW 3340

Mini oiler

Item no.: **782500** 

SW 2445

2-part maintenance unit

Item no.: **782600** 

SW 66715 Nipper

Item number: **789450**



PRODUCT DESCRIPTION:

swepro SW 66715 - The nipper is a cutting tool to cut and snip plastics and metals. It can cut through materials up to 6.5 mm in thickness. The tool has lever activation that makes it very practical and also has a sturdy metal housing. The nipper has been designed mainly for industrial use.

BENEFITS / SPECIAL FEATURES:

- ▶ Safety locking mechanism on lever
- ▶ Sturdy design
- ▶ Simple to use

TECHNICAL DETAILS:

DIMENSION	L: 300 mm
WEIGHT	0.90 kg
AIR CONSUMPTION Ø	956 cm ³ /operation
RATING	450 kg/cm ²
CUTTING PERFORMANCE	Copper 4.8 mm / Steel 4 mm / Plastic 6.5 mm
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	84 dB(A)
VIBRATION	<2.5 m/s ²


Alternative:

SW 6625

Nibbler

Item no.
789630

157

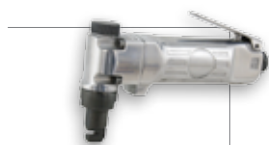

Accessory:

SW 1010

Hose reel

Item no.: **789010**

157

SW 3340

Mini oiler

Item no.: **782500**

164

SW 2445

2-part maintenance unit

Item no.: **782600**

164

SW 6620

Plate shear

Item number: **789620**

PRODUCT DESCRIPTION:

swepro SW 6620 - The plate shears are perfect for cutting metal up to 2.5 mm in thickness. Fast and precision work is possible thanks to the stroke frequency of 2200/minute. The very rugged design means these shears are also ideal for industrial use in harsh environments. The lever activation has a safety locking mechanism and so protects against unintentional switch-on.

BENEFITS / SPECIAL FEATURES:

- ▶ Sturdy design
- ▶ Simple to use
- ▶ Safety locking mechanism on lever

TECHNICAL DETAILS:

DIMENSION	L: 260 mm
WEIGHT	1.10 kg
AIR CONSUMPTION	0.170 m ³ /min
STROKE FREQUENCY	2200 1/min
CUTTING PERFORMANCE	Steel 1.6 mm / Aluminium 2.5 mm
ACTIVATION	Lever
CONNECTOR	1/4" BSPT
NOISE LEVEL	84 dB(A)
VIBRATION	1.5 m/s ²



Alternative:

SW 6612

Saw

Item no.
789612

153



Accessory:

SW 1010

Hose reel

Item no.: **789010**

167

SW 3340

Mini oiler

Item no.: **782500**

164

SW 2445

2-part maintenance unit

Item no.: **782600**

164

SW 618-V

Vacuum riveting gun

(stroke length 18 mm / rivet size 2.4 - 4.8 mm)

Item number: **789156**



<80 dBA



Alternative:

SW 66152

Riveting gun

Item no.
789152

swepro SW 66152 - Is a high quality and robust riveter made of full aluminum for industrial applications. Suitable for rivets sizes 2.4 mm and 3.2 mm.

BENEFITS / SPECIAL FEATURES:

- ▶ Sturdy design
- ▶ Simple to use

TECHNICAL DETAILS:

DIMENSION	L: 235 mm
WEIGHT	0.950 kg
NO. OF CLAMP JAWS	2
RIVET SIZES	3/32" (2.4 mm) 1/8" (3.2 mm)
CONNECTOR	1/4" BSPT



PRODUCT DESCRIPTION:

swepro SW 618-V – A high-quality and particularly ergonomic blind riveter with attachable collection container for riveting mandrels. The riveter lends itself to many industrial applications and can be used with rivets 2.4 – 4.8 mm in size. The adjustable vacuum function and ease of use (due to the swivel joint on the air connector) are further product benefits.

BENEFITS / SPECIAL FEATURES:

- ▶ Robust
- ▶ Simple to use
- ▶ Adjustable vacuum
- ▶ Different rivet sizes

TECHNICAL DETAILS:

DIMENSION	H: 285 mm
WEIGHT	3.30 kg
RATING	596 kg
STROKE LENGTH	18 mm
ACTIVATION	Lever
NO. OF CLAMP JAWS	2
RIVET SIZES	3/32" (2.4 mm) 1/8" (3.2 mm) 5/32" (4.0 mm) 3/16" (4.8 mm)
AIR CONNECTOR	1/4" BSPT
NOISE LEVEL	81 dB(A)
VIBRATION	<2.5 m/s ²

SW 6675V

Vacuum riveting gun

Item number: **789157**

PRODUCT DESCRIPTION:

swepro SW 6675V - A high-quality, powerful and lightweight blind riveter with attachable collection container for riveting mandrels. The riveter lends itself to many industrial applications and can be used with rivets 2.4 - 4.8 mm in size. The switch on the bottomside of the housing turns the device off when it is stalled. This effect and the adjustable vacuum function are further product benefits, which reduce air consumption. The non-slip and vibration-damping handles, and ergonomic design, guarantee speedy and controlled working.

BENEFITS / SPECIAL FEATURES:

- ▶ Adjustable vacuum
- ▶ Isulated soft grip
- ▶ Automatic shut-off

Accessory:

SW 2445

Item no.
782600

164



TECHNICAL DETAILS:

WEIGHT 1.80 kg

DIMENSION H: 287 mm

SQUARE DRIVE 2.4 mm / 3.2 mm /
4.0 mm / 4.8 mm

PERFORMANCE 100 kgs

CONNECTOR 1/4" BSPT

ACTIVATION Lever

NOISE LEVEL 79 dB(A)

VIBRATION <2.5 m/s²

SW 6677V

Vacuum riveting gun

Item number: **789154**

PRODUCT DESCRIPTION:

swepro SW 6677V - A high-quality, powerful and lightweight blind riveter with attachable collection container for riveting mandrels. The riveter lends itself to many industrial applications and can be used with rivets 3.2 - 6.4 mm in size. The non-slip and vibration-damping handles, and ergonomic design, guarantee speedy and controlled working.

BENEFITS / SPECIAL FEATURES:

- ▶ Adjustable vacuum
- ▶ Isulated soft grip

Accessory:

SW 3340

Item no.
782500

164



TECHNICAL DETAILS:

WEIGHT 1.70 kg

DIMENSION H: 317 mm

SQUARE DRIVE 3.2 mm / 4.0 mm /
4.8 mm / 6.4 mm


PERFORMANCE 1700 kgs

CONNECTOR 1/4" BSPT

ACTIVATION Lever

NOISE LEVEL 71 dB(A)

VIBRATION <2.5 m/s²

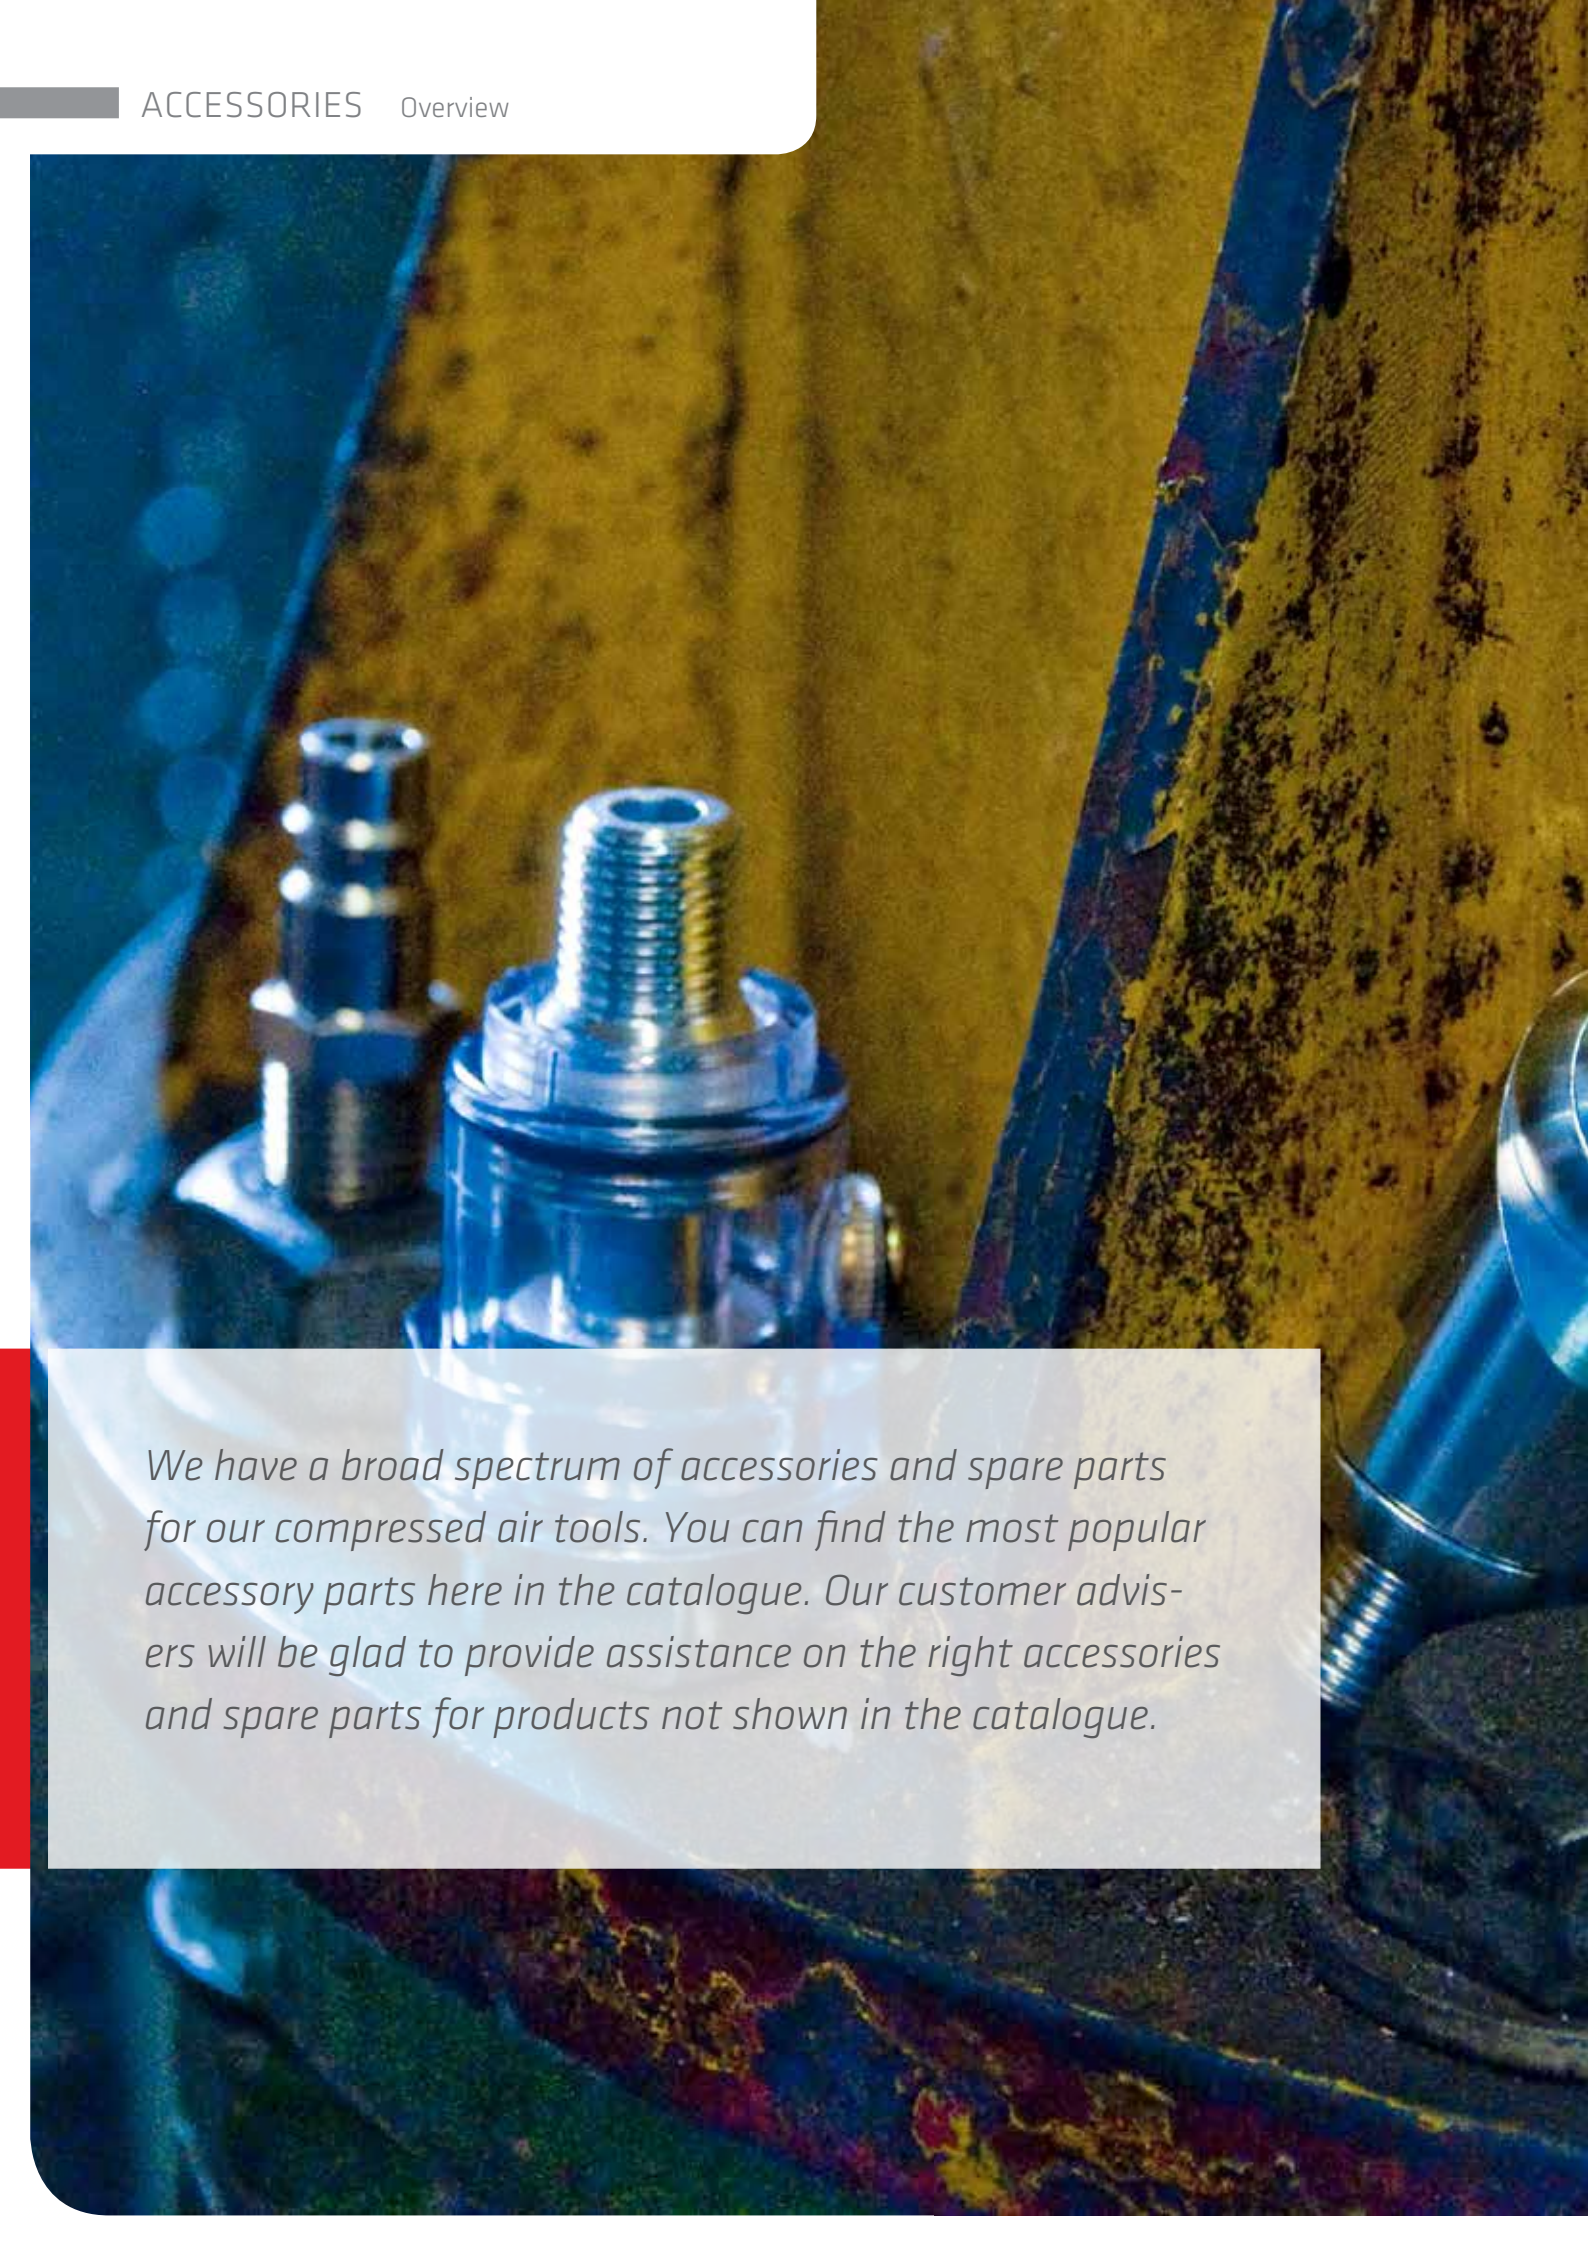A close-up photograph of various compressed air tool accessories. In the foreground, a clear plastic air filter is mounted on a metal threaded fitting. To its left, another metal fitting with a hexagonal base is visible. The background shows a textured, yellowish-brown surface, possibly a piece of machinery or a wall, with a blue metal strip running diagonally across it. The lighting is dramatic, with strong highlights and deep shadows, creating a sense of depth and texture.

We have a broad spectrum of accessories and spare parts for our compressed air tools. You can find the most popular accessory parts here in the catalogue. Our customer advisers will be glad to provide assistance on the right accessories and spare parts for products not shown in the catalogue.

07 Accessory



- ▶ Maintenance units
- ▶ Mini oiler
- ▶ Quick-release nipples
- ▶ Hose nozzles
- ▶ Conflex
- ▶ Hose reel
- ▶ Telescoping torque arm
- ▶ Balancers

MAINTENANCE UNITS

SW 2445 (2-part)

Item number: **782600**

PRODUCT DESCRIPTION:

The 2 maintenance unit comprises water separator, oiler and manometer. The output pressure is adjustable in range 0.49 to 8.34 bar.

TECHNICAL DETAILS:

SETTING RANGE PRESSURE RANGE	0.49 - 8.34 bar
MAX. OPERATING PRESSURE	9.32 bar
OPERATING PRESSURE RANGE	5 - 60°C
WATER OUTLET	60 ml
OIL VOLUME	90 ml



MINI OILER

SW 3340 (aluminium design)

Item number: **782500**



PRODUCT DESCRIPTION:

swepro SW 3340 - The mini oiler is suitable for the direct connection to your compressed air devices. It is ideal for use in workshops and industry and ensures continual lubrication of your compressed air products. The mini oiler can be filled with pneumatic oil via a filler cap on the side. The oil flow-through volume can also be adjusted. We recommend our maintenance units for continual use.

TECHNICAL DETAILS:

CONNECTOR	1/4" BSPT
WEIGHT	0.061 kg
DIMENSIONS	L: 65 mm

Alternative:
SW 3330
Mini oiler 3/8"

Item no.
782530



QUICK-RELEASE NIPPLES AND HOSE NOZZLES



SW OP10M / SW OP20M / SW OP30M

Artikelnr.: **800203**

Artikelnr.: **800200**

Artikelnr.: **800201**

Quick-release nipple (nickel-plated)

CONNECTOR:	1/8" 1/4" 3/8" MPT BSPT
FOR SW OP10M:	10C, 38LE, 38GE, 20L
FOR SW OP20M:	Standard for tools with FPT
FOR SW OP30M:	Maintenance units, tools with FTP



SW OP20F

Quick-release nipple (nickel-plated)

Item no.
800202

CONNECTOR: 1/4" FPT BSPT

FOR: Standard for tools with MPT



SW EC30M

Quick-release coupling (nickel-plated)

Item no.
800211

CONNECTOR: 3/8" MPT BSPT

FOR: Maintenance units



Hose nozzle BSPT 1/4"
(nickel-plated) - 6 mm inner diameter

Item no.
831610

Hose nozzle BSPT 3/8"
(nickel-plated) - 9 mm inner diameter

Item no.
831710

Hose nozzle BSPT 1/2"
(nickel-plated) - 13 mm inner diameter

Item no.
831810

NEW!

CONFLEX

Conflex R-1/4" BSPT

Item number: **768214**



PRODUCT DESCRIPTION:

The Conflex aluminium ball joint guarantees ergonomic operation of the compressed air tools. Being rotatable by 360°, together with an angular offset of 90°, means more simple and quicker working at hand-work places.

Conflex R-3/8" BSPT

Item number: **768213**

Conflex R-1/2" BSPT

Item number: **768220**

NEW!

TECHNICAL DETAILS

CONFLEX R-1/4" BSPT:

Weight	0.07 kg
Connector	1/4" BSPT

CONFLEX R-3/8" BSPT

Weight	0.13 kg
Connector	3/8" BSPT

CONFLEX R-1/2" BSPT

Weight	0.13 kg
Connector	1/2" BSPT

HOSE REEL

SW 1010

6.5 mm x 10 mm x 10 m /
self-winding

Item number: **789010**

PRODUCT DESCRIPTION:

swepro SW 1010 - The swepro hose reel has a 10 m long, flexible and sturdy PU- coated compressed air hose that is housed in a durable plastic housing. Installation of the hose reel is very easy thanks to the swivel wall mount. Hose reels are used in all sectors of industry – such as on production lines, in maintenance, in workshops and at tyre dealers. Attaching the hose reel above the place of use and the self-winding air hose reduces the risk posed by hoses lying around and presenting trip hazards.



TECHNICAL DETAILS:

MAX. OPERATING PRESSURE	15 bar
WEIGHT	2.85 kg
DIMENSIONS	10 m

SW 2010

810 mm x 15 mm x 10 m / self-winding /
metal housing

Item number: **789015**

PRODUCT DESCRIPTION:

swepro SW 2010 - The swepro hose reel has a 10 m long, flexible and sturdy PU - coated compressed air hose that is housed in a durable metal housing. Installation of the hose reel is very easy thanks to the swivel wall mount. Hose reels are used in all sectors of industry - such as on production lines, in maintenance, in workshops and at tyre dealers. Attaching the hose reel above the place of use and the self-winding air hose reduces the risk posed by hoses lying around and presenting trip hazards.



TECHNICAL DETAILS:

MAX. OPERATING PRESSURE	15 bar
WEIGHT	7.86 kg
CONNECTOR	1/2" BSPT
MAX. TEMPRATURE	+60 °C

TELESCOPIC TORQUE ARM



Note: The screwdriver on the product image is not included with the telescopic torque arm.

SW T030

Item number: **783640**

PRODUCT DESCRIPTION:

swepro SW T030 - The telescopic arm is used mainly as a working aid for the user during installation. Installation to workbenches or walls is very easy with a table clamp or screw joint. The locking mechanism enables the height to be adjusted up to 550 mm and the length extended out to 1000 mm. The telescopic arm takes pressure off the user and assumes the weight of the tool off the arms and shoulders of the user. Tools with a maximum diameter of 50 mm can be mounted on the clamp fastener.

TECHNICAL DETAILS:

MAX. TORQUE	30 Nm
WEIGHT	4.50 kg
DIMENSIONS	H: 550 mm / L: 1000 mm
TABLE CLAMP	Max. 67 mm
ADAPTER: CLAMP Ø	Max. 50 mm

Striking mechanism lubricant

SW G211

Item number: **801590**

PRODUCT DESCRIPTION:

striking mechanism lubricant (100 ml) inc. pistol and 2 nozzle attachments

NEW!

SW G200

Item number: **800969**

PRODUCT DESCRIPTION:

100 ml striking mechanism lubricant

NEW!

BALANCERS



SW 2201

0.3 kg - 0.8 kg

Item number: **789020**

PRODUCT DESCRIPTION:

swepro SW 2201 - swepro balancers boast longevity and precision. The balancer offers reliable relief during installation activities and enables smooth work processes. A balancer is fixed to the attachment above the work area. On the rear is a rotatable adjustment for the balancer to align its resistance to the weight of the workpiece suspended. The SW 2201 is suitable for workpiece weights of 0.3 to 0.8 kg and has a maximum spring travel of 1.6 m.

TECHNICAL DETAILS:

WEIGHT	0.49 kg
DIMENSIONS (HxW)	240 mm x 44 mm
SPRING TRAVEL	1.6 m
LOAD RANGE	0.30 - 0.80 kg



SW 2203

0.6 kg - 1.5 kg

Item number: **789021**

PRODUCT DESCRIPTION:

swepro SW 2203 - swepro balancers boast longevity and precision. The balancer offers reliable relief during installation activities and enables smooth work processes. A balancer is fixed to the attachment above the work area. On the rear is a rotatable adjustment for the balancer to align its resistance to the weight of the workpiece suspended. The SW 2203 is suitable for workpiece weights of 0.6 to 1.5 kg and has a maximum spring travel of 1.6 m.

TECHNICAL DETAILS:

WEIGHT	0.49 kg
DIMENSIONS (HxW)	240 mm x 44 mm
SPRING TRAVEL	1.6 m
LOAD RANGE	0.60 - 1.50 kg





08

Facts & technical details

- ▶ About the products
- ▶ Benefits at a glance
- ▶ Maintenance
- ▶ The "correct" torque
- ▶ Technical details

About the products



Product safety

All swepro compressed air tools satisfy European safety requirements and have the CE seal. If you have any questions regarding product quality or adherence to safety requirements:

Speak to us!

What is noise?

We all have a different perception of noise, meaning we speak of subjective perception. Noise is generated through vibration and it emanates in air as sound waves. The strength of vibrations, i.e. of the sound waves, is measured as sound pressure. The unit used for the sound pressure level is the decibel dB(A).

NOISE IS HARMFUL.

Continual exposure to noise can limit the well-being and performance of humans, and cause negative health consequences. According to scientific studies, people exposed to continual noise have an increased risk of cardiovascular disease. Learning, concentration and sleep disorders also occur.

EMPLOYEE PROTECTION

Equipped with knowledge of potential consequences as a result of noise exposure within the working environment, attention must be paid to reducing the noise pressure level and employees must be protected from the consequences of continual noise. The use of noise-reducing tools can make a contribution towards the protection of employees.

EC Directive 2003/10/EC lays down regulations for noise exposure at the workplace. For noise pressure levels of just 80 dB(A), an employee must be explained the potential health consequences of noise and ear protectors must be provided. For noise pressure levels of 85 dB(A) and higher, guarantees must be in place that employees wear ear protectors.

NOISE LEVEL	NOISE TYPE	VOLUME	NOISE PERCEPTION
I 30 - 65 dB(A) Mental reaction	Ticking of a quiet clock, whispering	30 dB(A)	Very quiet
	Whispering close-by, quiet residential street	40 dB(A)	Fairly quiet
	Conversation	50 dB(A)	Normal
	Conversation at a distance of 1 m, office noise	60 dB(A)	Normal - loud
II 65 - 90 dB(A) Physiological reaction	Loud conversation, calling, cars 10 m away	70 dB(A)	Loud - very loud
	Noise of heavy traffic	80 dB(A)	Very loud
	Loud factory building	90 dB(A)	Very loud
III 90 -120 dB(A) Hearing damage, earache	Car horn at distance of 7 m	100 dB(A)	Very loud - unbearable
	Boiler maker	110 dB(A)	Very loud - unbearable
	Aircraft engine	120 dB(A)	Unbearable - painful
	---	130 dB(A)	Pain threshold

Benefits at a glance

► HANDLING

The latest generation of tools has a composite housing that considerably improves handling with weight reduction and ergonomic handle.

► NOISE REDUCTION

The operation of many new tools is vibration and noise-reduced, meaning the resultant physical exposure of users is reduced markedly and there is a contribution towards occupational work and safety.

► SAFETY

The vast majority of our tools protect users during operation, such as with a safety switch, automatic cut-out function or safety locking mechanism.

► COMPRESSED AIR CONSUMPTION

When compressing air to make compressed air, a large part of the energy deployed is lost as unused thermal energy. This means compressed air is one of the most expensive sources of energy. All the more important then to bear in mind low energy consumption in the design of our tools.



Energy efficiency

Compressed air is an indispensable part of processes in many industrial and commercial applications. This is the reason why users should not neglect energy costs when using compressed air. When compressing atmospheric air into compressed air, a large part of the energy is lost as unused thermal energy. Our focus is the compressed air consumption of our tools, and hence the energy efficiency of our products.

Maintenance: Air supply, operating pressure and lubrication

Air supply

- ▶ swepro recommends installing a water separator and oiler between the compressor and tool. This is because compressed air contains a high level of air moisture and dirt and can therefore damage the tool used. We also advise draining the compressed air tank on a daily basis.
- ▶ When using new hoses and lines, we recommend cleaning them beforehand.
- ▶ Ensure the lines and hoses are clean so as to prevent pressure drops caused by dirt and moisture.
- ▶ After disconnecting from the tool, do not place the compressed air hose on the floor because this can cause dirtying of the inside of the hose.
- ▶ Use a pressure regulator (part of the maintenance unit) to attain the constant operating pressure of 6.3 bar required.

Lubrication

- ▶ Lubrication of compressed air tools is indispensable. An optimal solution is the installation of a maintenance unit (see Page 164) to guarantee constant, automatic lubrication.
- ▶ For manual lubrication, the air hose must be undone and the air inlet oiled daily with a few drops of non-resinous pneumatic oil.

Applicable for all products: Maximum operating pressure 6.3 bar – use oily air.



Searching for the "right" torque



swepro assembly tools have different torque ranges and can therefore be deployed in very many screw applications. To find the "perfect" tool for your application, the requirements of the assembly application must be known. The tightening torque table is your first aid. Use the support of the swepro service team – they will be able to help you choose the appropriate assembly tool (such as impact wrench, torque wrench or compressed air ratchet wrench).

NOTE THE FOLLOWING PARAMETERS:

- ▶ Dimension: Size of screw
- ▶ Strength class: Quality of screw
- ▶ Thread: Standard or fine thread

Experience tells us that: To tighten a screw with dimensions M10 x 1.50 having a standard thread and strength class 8.8 to a pretension of 26 kN, a torque of 49 Nm is required.

Pretension and tightening torque

REGULAR THREAD

DIMENSION STRENGTH CLASS	PRETENSION (kN)					TIGHTENING TORQUE (Nm)				
	4.6	5.6	8.8	10.9	12.9	4.6	5.6	8.8	10.9	12.9
M 4 x 0.70	1.29	1.70	3.90	5.71	6.72	1.03	1.38	3.00	4.42	5.10
M 5 x 0.80	2.11	2.79	6.40	9.30	10.90	2.01	2.69	5.91	8.73	10.00
M 6 x 1.00	2.96	3.94	9.00	13.21	15.42	3.50	4.61	10.02	15.02	18.10
M 8 x 1.25	5.42	7.23	16.50	24.21	28.52	8.4	11.0	25.0	36.05	43.01
M 10 x 1.50	8.64	11.50	26.00	38.49	45.0	17.0	22.0	49.0	72.0	84.0
M 12 x 1.75	12.6	16.8	38.5	56.0	66.0	29.0	39.0	85.0	125.0	145.0
M 14 x 2.00	17.3	23.1	53.0	77.0	90.0	46.0	62.0	135.0	200.0	235.0
M 16 x 2.00	23.8	31.7	72.0	106.0	124.0	71.0	95.0	210.0	310.0	365.0
M 18 x 2.50	28.9	38.6	91.0	129.0	151.0	97.0	130.0	300.0	430.0	500.0
M 20 x 2.50	37.2	49.6	117.0	166.0	194.0	138.0	184.0	425.0	610.0	710.0
M 22 x 2.50	46.5	62.0	146.0	208.0	243.0	186.0	250.0	580.0	830.0	970.0
M 24 x 3.00	53.6	71.4	168.0	239.0	280.0	235.0	315.0	730.0	1050.0	1220.0
M 27 x 3.00	70.6	94.1	221.0	315.0	370.0	350.0	470.0	1100.0	1550.0	1800.0
M 30 x 3.50	85.7	114.5	270.0	385.0	450.0	475.0	635.0	1450.0	2100.0	2450.0
M 33 x 3.50	107.0	142.5	335.0	480.0	560.0	645.0	865.0	2000.0	2800.0	3400.0
M 36 x 4.00	125.5	167.5	395.0	560.0	680.0	1080.0	1440.0	2600.0	3700.0	4300.0
M 39 x 4.00	151.0	201.0	475.0	670.0	790.0	1330.0	1780.0	3400.0	4800.0	5600.0

FINE THREAD

DIMENSION STRENGTH CLASS	PRETENSION (kN)			TIGHTENING TORQUE (Nm)		
	8.8	10.9	12.9	8.8	10.9	12.9
M 8 x 1.00	18.1	26.2	31.0	27.5	40.0	47.5
M 10 x 1.25	28.2	41.0	48.5	54.0	79.0	93.0
M 12 x 1.25	43.3	64.0	74.0	96.0	140.0	165.0
M 12 x 1.50	40.0	60.0	70.0	92.0	135.5	155.0
M 14 x 1.50	58.0	86.0	100.0	150.0	220.4	260.8
M 16 x 1.50	79.1	116.2	136.0	230.7	340.0	390.0
M 18 x 1.50	106.3	152.5	177.0	350.0	490.0	580.7
M 20 x 1.50	134.0	191.0	224.0	480.5	690.0	800.0
M 22 x 1.50	166.0	236.0	275.0	640.0	920.0	1070.4
M 24 x 2.00	189.0	270.0	315.0	810.0	1160.0	1350.0
M 27 x 2.00	245.0	350.0	410.0	1190.0	1700.0	2000.0
M 30 x 2.00	309.0	440.0	515.0	1610.0	2300.2	2690.0

Grinding tools

Axial grinders

MICRO GRINDERS

ITEM NO.	ITEM NAME	COLLET (MM)	SPEED (1/MIN)	LENGTH (MM)	WEIGHT (KG)	AIR CONSUMPTION (M ³ /MIN)	DISCHARGE AIR	CONNECTOR (")	PARTICULAR FEATURE	PAGE
783376	SW 3371M micro grinder	3	60,000	132	0.245	0.057	Rear	1/4	Insulated	13
783370	SW 3370 micro grinder	3	56,000	132	0.245	0.057	Rear	1/4		14
784600	SW 316 micro grinder	3	56,000	150	0.210	0.160	Rear	1/4		14
784100	SW 135 micro grinder	3 + 6	35,000	175	0.350	0.170	Rear	1/4		15
783380	SW 10G micro grinder	3	65,000	160	0.190	0.060	Rear	1/8		15
783765	SW 3391M micro grinder	3 + 6	21,000	160	0.200	0.170	Rear	1/4		16
783766	SW 3392M micro grinder	3 + 6	21,000	160	0.230	0.170	Rear	1/4		16
783743	SW 3393M micro grinder	3	72,000	157	0.230	0.150	Rear	1/4	Insulated	17

AIR DIE GRINDERS

ITEM NO.	ITEM NAME	COLLET (MM)	SPEED (1/MIN)	LENGTH (MM)	WEIGHT (KG)	AIR CONSUMPTION (M ³ /MIN)	DISCHARGE AIR	CONNECTOR (")	PARTICULAR FEATURE	PAGE
783390	SW 20L air die grinder	6	40,000	165	0.38	0.370	Rear	1/8	0.2 PS	18
783742	SW 7733 SAM air die grinder	6	3,600	220	0.60	0.099	Adjustable	1/4		19
783325	SW 25SM6 air die grinder	6	25,000	170	0.55	0.280	Rear	1/4	Noise-reduced 72 dB(A)	20
783326	SW 25SM3 air die grinder	3	25,000	170	0.55	0.280	Rear	1/4	Noise-reduced 72 dB(A)	21
783327	SW 25SM8 air die grinder	8	25,000	170	0.55	0.280	Rear	1/4	Noise-reduced 72 dB(A)	21
783353	SW M3005M air die grinder	6	25,000	170	0.45	0.105	side	1/4	Speed adjustable	22
783733	SW 7732FM air die grinder	6	25,000	120	0.30	0.085	front	1/4		23
783777	SW 7764-P air die grinder	6	22,000	205	0.92	0.110	Rear	1/4	Isoliert / 0.65 PS	25

ANGLE AXIAL GRINDERS

ITEM NO.	ITEM NAME	COLLET (MM)	SPEED (1/MIN)	LENGTH (MM)	WEIGHT (KG)	AIR CON-SUMPTION (M ³ /MIN)	DISCHARGE AIR	CONNECTOR (")	PARTICULAR FEATURE	PAGE
783739	SW 7734FM angle grinder	6	18,000	124	0.40	0.085	voorne	1/4	Isulated	26
783734	SW 7734 angle grinder	6	20,000	146	0.49	0.090	Rear	1/4		27
783716	SW 7765-P high-performance angle grinder	6	19,000	165	0.55	0.050	Rear	1/4	Isulated	28
783956	SW M3050M angle grinder	6	20,000	176	0.60	0.085	Rear	1/4	Level setting	29

EXTENDED AIR DIE GRINDERS

ITEM NO.	ITEM NAME	COLLET (MM)	SPEED (1/MIN)	LENGTH (MM)	WEIGHT (KG)	AIR CON-SUMPTION (M ³ /MIN)	DISCHARGE AIR	CONNECTOR (")	PARTICULAR FEATURE	VIBRATION (M/S ²)	PAGE
783731	SW 38LE extended air die grinder	6	20,000	290	0.80	0.300	Rear	1/8		4.6	31
783730	SW 38CE extended air die grinder	6	20,000	295	0.80	0.300	Rear	1/8		4.6	31
783350	SW 3053M extended air die grinder	6	23,000	300	0.73	0.085	side	1/4	Insulated	3.1	32
783360	SW 7433M high-p. air die grinder	6	14,600	394	1.73	0.136	side	3/8	1 HP	4.1	33
783360	SW 7438M high-p. air die grinder	6	13,000	390	1.70	0.054	side	3/8		2.2	33
783750	SW 7496LM extended air die grinder	6	22,100	455	1.30	0.380	Adjustable	1/4	1 HP	2.1	34
783732	SW 7732M air die grinder	6	25,000	120	0.30	0.090	Rear	1/4		1.3	35
783780	SW 7494M angle grinder	6	18,000	175	0.80	0.380	Rear	1/4		1.7	36
783781	SW 7495M air die grinder	6	24,000	175	0.65	0.380	Adjustable	1/4		1.9	37
783746	SW 7495LM air die grinder	6	22,800	240	0.77	0.380	Adjustable	1/4	1 HP	1.9	38

Surface grinders

ORBITAL SANDERS

ITEM NO.	ITEM NAME	GRINDING PLATE/ BELT/DISC (MM)	SPEED (1/MIN)	PS / WATT	LENGTH (MM)	HEIGHT (MM)	AIR CON- SUMPTION (M ³ /MIN)	WEIGHT (KG)	VOLUME (DB(A))	DIS- CHARGE AIR	CONNEC- TOR(°)	PAGE
789115	SW 70-C clip orbital sander	93 x 178	10,000	0.24 / 179	178	112	0.430	0.95	83	Rear	1/4	41
789111	SW 7111 velcro orbital sander	75 x 100	10,000		140		0.260	0.70	80	Rear	1/4	42
789113	SW 7113 velcro orbital sander	100 x 180	8,500		150		0.260	1.10	80	Rear	1/4	43

RANDOM ORBITAL SANDERS

ITEM NO.	ITEM NAME	GRINDING PLATE/ BELT/DISC (MM)	SPEED (1/MIN)	ORBITAL DI-HP / WATT AMETER Ø (MM)	LENGTH (MM)	AIR CON- SUMPTION (M ³ /MIN)	WEIGHT (KG)	VIBRA- TION (M/S ²)	DIS- CHARGE AIR	CON- NECTOR (°)	PARTICULAR FEATURE	PAGE
789103	SW 05C30H	75	10,000	5	174.8	0.453	0.71	4.1	Rear	1/4	Extraction	44
789101	SW 05N30H	75	10,000	5	135.4	0.453	0.66	3.3	Rear	1/4		45
789121	SW 7117NC5	125	10,000	5		0.300	0.75	1.5	Rear	1/4		46
789125	SW 7117NC6	150	10,000	5		0.300	0.75	1.5	Rear	1/4		46
789123	SW 7117DC5	125	10,000	5		0.300	0.80	1.5	Rear	1/4	Extraction	47
789127	SW 7117DC6	150	10,000	5		0.300	0.80	1.5	Rear	1/4	Extraction	47
789145	SW 05N-6	150	10,000	5	206	0.430	0.80	4.1	Rear	1/4		48
789146	SW 05C-6	150	10,000	5	206	0.430	0.80	2.7	Rear	1/4	Extraction	49
789147	SW 9119NC-6	150	12,000	5	189	0.430	0.83	2.9	Rear	1/4		50
789148	SW 9119DC-6	150	12,000	5	260	0.430	0.91	2.0	Rear	1/4	Extraction	51

BELT SANDERS

ITEM NO.	ITEM NAME	GRINDING PLATE/ BELT/DISC (MM)	SPEED (1/MIN)	LENGTH (MM)	AIR CON- SUMPTION (M ³ /MIN)	WEIGHT (KG)	DISCHARGE AIR	CON- NECTOR (°)	PARTICULAR FEATURE	PAGE
800750	SW C700 belt sander	10 x 330	18,000	305	0.057	0.80	Rear	1/4	Speed adjustable	52
800755	SW C703 belt sander	20 x 520	18,000	375	0.085	1.20	Rear	1/4	Speed adjustable	53
789130	SW 7709 belt sander	10 x 330	16,000	260	0.170	0.90	Rear	1/4		54
789135	SW 7710 belt sander	20 x 520	16,000	340	0.170	1.20	Rear	1/4		55

DELTA SANDERS

ITEM NO.	ITEM NAME	GRINDING PLATE/ BELT/DISC (MM)	SPEED (r/MIN)	ORBITAL DIAMETER Ø (MM)	LENGTH (MM)	AIR CON- SUMPTION (M ³ /MIN)	WEIGHT (KG)	DIS- CHARGE AIR	CONNECTOR	PARTICULAR FEATURE	PAGE
789108	SW 7114-DC delta sander	70 X 100	10,000	3.2	220	0.255	0.70	Rear	1/4	Extraction	56
789118	SW 7114-NC delta sander	71 X 100	10,000	3.2	220	0.255	0.70	Rear	1/4		57

ANGLED SANDERS

ITEM NO.	ITEM NAME	GRINDING PLATE/ BELT/DISC (MM)	SPEED (r/MIN)	SPEED (r/MIN)	LENGTH (MM)	AIR CONSUMP- TION (M ³ /MIN)	WEIGHT (KG)	DISCHARGE AIR	CONNECTOR (°)	PAGE
783348	SW M5143 mini-angled sander	76	22,000	22,000	158	0.380	0.54	hinten	1/4	58

CUT-OFF ANGLE GRINDERS

ITEM NO.	ITEM NAME	GRINDING PLATE/ BELT/DISC (MM)	SPEED (r/MIN)	HP / WATT	LENGTH (MM)	AIR CONSUMP- TION (M ³ /MIN)	WEIGHT (KG)	DIS- CHARGE AIR	CONNECTOR (°)	PARTICULAR FEATURE	PAGE
783770	SW 7853R cut-off angle grinder	125	11,000		232	0.540	1.60		1/4		59
783760	SW 7845L cut-off angle grinder	125	13,500	1PS	265	0.158	2.38	Side	3/8		60
783740	SW 7745L cut-off angle grinder	125	11,000		208	0.170	2.20	Side	1/4	Speed adjustable	61
783775	SW 7877L cut-off angle grinder	180	7,000		340	0.153	3.30		3/8		62

PISTOL-TYPE GRINDERS

ITEM NO.	ITEM NAME	COLLET (MM)	SPEED (1/MIN)	TORQUE RANGE (NM)	LENGTH (MM)	AIR CON-SUMPTION (M ³ /MIN)	WEIGHT (KG)	DIS-CHARGE AIR	CONNECTOR	PARTICULAR FEATURE	ROTATION DIRECTION	ACTIVATION	PAGE
783335	SW 25SM-6P pistol-type grinder	6	25,000	0.05 - 0.22	180	0.28	0.69	Bottom	1/4	Noise-reduced 70 dB(A)	Right-Left	Button	64
783336	SW 25SM-3P pistol-type grinder	3	25,000	0.3 - 2.0	180	0.28	0.69	Bottom	1/4	Noise-reduced 70 dB(A)	Right-Left	Button	64
783337	SW C221 mini-pistol-type grinder	spindle	2,600	0.5 - 3.5	155	0.09	0.54	Bottom	1/4		Right	Button	65
783345	SW 7157 pistol-type grinder	spindle	6,000	1.0 - 6.0	175	0.45	0.74	Bottom	1/4		Right-Left	Button	65

Assembly tools

STRAIGHT-TYPE SCREWDRIVERS

ITEM NO.	ITEM NAME	ACTIVATION	FORM ADAPTER	TORQUE RANGE (NM)	SPEED (1/MIN)	ROTATION DIRECTION	LEN-GTH (MM)	WEIGHT (KG)	AIR CON-SUMPTION (M ³ /MIN)	VOLUME DIS-CHARGE AIR	CONNECTOR	PARTICULAR FEATURE	PAGE
783801	SW SSSP002	Push	Straight Hexagon bit	0.05 - 0.22	1,000	Right / Left	250	0.60	0.20	68	1/4	Auto-shut-off	69
783802	SW SSSP020	Push	Straight Hexagon bit	0.3 - 2.0	2,200	Right / Left	250	0.60	0.28	72	1/4	Auto-shut-off	70
783803	SW SSSP035	Push	Straight Hexagon bit	0.5 - 3.5	1,000	Right / Left	250	0.60	0.28	72	1/4	Auto-shut-off	71
783806	SW SSSP060	Push	Straight Hexagon bit	1.0 - 6.0	2,200	Right / Left	285	0.88	0.55	74	1/4	Auto-shut-off	72
783807	SW SSSP110	Push	Straight Hexagon bit	3.0 - 11.0	550	Right / Left	285	0.88	0.55	75	1/4	Auto-shut-off	73
783808	SW SSSP180	Push	Straight Hexagon bit	3.0 - 18.0	300	Right / Left	285	0.90	0.55	75	1/4	Auto-shut-off	74
783811	SW SSSL010	Lever	Straight Hexagon bit	0.1 - 1.0	1,000	Right / Left	250	0.63	0.20	72	1/4	Auto-shut-off	75
783813	SW SSSL035	Lever	Straight Hexagon bit.	0.5 - 3.5	1,000	Right / Left	250	0.63	0.28	72	1/4	Auto-shut-off	76
783817	SW SSSL110	Lever	Straight Hexagon bit	3.0 - 11.0	550	Right / Left	285	0.90	0.55	73	1/4	Auto-shut-off	77
783818	SW SSSL180	Lever	Straight Hexagon bit.	3.0 - 18.0	300	Right / Left	285	0.92	0.55	73	1/4	Auto-shut-off	78

ANGLE-TYPE SCREWDRIVERS

ITEM NO.	ITEM NAME	ACTIVATION	FORM ADAPTER	TORQUE RANGE (NM)	SPEED (1/MIN)	ROTATION DIRECTION	LENGTH (MM)	WEIGHT (KG)	AIR CONSUMPTION (MP/MIN)	VOLUME DISCHARGE (DB(A))	CONNECTOR	PARTICULAR FEATURE	PAGE
783823	SW SASLo20	Lever	Angle Hexagon bit	0.3 - 2.0	2,200	Right / Left	310	0.77	0.28	71	Rear 1/4	Auto-shut-off	79
783825	SW SASLo50	Lever	Angle Hexagon bit	1.0 - 5.0	550	Right / Left	310	0.77	0.30	71	Rear 1/4	Auto-shut-off	80
783826	SW SASL110	Lever	Angle Hexagon bit	3.0 - 11.0	550	Right / Left	345	1.35	0.55	74	Rear 1/4	Auto-shut-off	81
783828	SW SASL180	Lever	Angle Hexagon bit	3.0 - 18.0	300	Right / Left	345	1.45	0.55	74	Rear 1/4	Auto-shut-off	82
783600	SW CAW68	Lever	Angle 3/8" bit	5.0 - 30.0	250	Right / Left	307	1.40	0.55	77	Rear 1/4	Auto-shut-off	83

PISTOL-TYPE SCREWDRIVERS

ITEM NO.	ARTIKEL	ACTIVATION	FORM ADAPTER	TORQUE RANGE (NM)	ACTIVATION (1/MIN)	VIBRATION (S/MP)	LENGTH (MM)	WEIGHT (KG)	AIR CONSUMPTION (MP/MIN)	VOLUME DISCHARGE (DB(A))	CONNECTOR	PARTICULAR FEATURE	PAGE
783557	SW CCP45	Button	Pistol Hexagon bit	0.5 - 7.0	750	1.0	140	0.60	0.28	72	Bottom / rotatable 1/4	Safety clutch	84
783559	SW CCP48	Button	Pistol Hexagon bit	1.0 - 7.0	1,700	0.5	165	0.85	0.55	75	Bottom / rotatable 1/4	Safety clutch	84
783558	SW CCP58	Button	Pistol Hexagon bit	1.0 - 13.0	750	0.1	165	0.85	0.55	75	Bottom / rotatable 1/4	Safety clutch	85
783531	SW CPP38	Push	Pistol Hexagon bit	0.3 - 2.5	1,800	1.0	180	0.64	0.28	73	Bottom / rotatable 1/4	Auto-shut-off	86
783541	SW CPP47	Push	Pistol Hexagon bit	1.0 - 4.9	550	1.0	180	0.74	0.28	73	Bottom / rotatable 1/4	Auto-shut-off	86
783551	SW CPP50	Push	Pistol Hexagon bit	1.0 - 5.9	1,400	0.9	210	0.95	0.55	75	Bottom / rotatable 1/4	Auto-shut-off	87
783561	SW CPP60	Push	Pistol Hexagon bit	2.9 - 10.8	550	0.3	210	0.95	0.55	74	Bottom / rotatable 1/4	Auto-shut-off	88
783571	SW CPP65	Push	Pistol Hexagon bit	2.9 - 17.6	300	0.4	210	1.10	0.55	76	Bottom / rotatable 1/4	Auto-shut-off	89
783572	SW CPP68	Push	Pistol Hexagon bit	4.9 - 29.4	250	0.4	210	1.10	0.55	76	Bottom / rotatable 1/4	Auto-shut-off	89
783573	SW 4508	Button	Pistol Hexagon bit	Max. 61	8,500	2.5	176	1.14	0.11	77	Bottom 1/4		92
783574	SW 4509	Button	Pistol 3/8" - bit	Max. 122	8,500	3.5	160	1.14	0.08	87	Bottom 1/4		92

IMPACT WRENCHES

ITEM NO.	ITEM NAME	SQUARE DRIVE (")	LEVEL SETTING	MAX. TORQUE (NM)	SPEED (1/MIN)	ROTATION DIRECTION	LEN-GTH (MM)	WEIGHT (KG)	AIR CON-SUMPTION (M ³ /MIN)	VOL-UME (DB(A))	CON-NECTOR (")	VIBRATION FEATURE	PARTICULAR FEATURE	PAGE
785751	SW 5141	1/2	6	542	11,500	right - left	122	1.60	0.170	96	1/4	12.49		94
785705	SW C541	1/2	4	406	10,000	right - left	165	1.20	0.170	92	1/4	6.87		95
785738	SW C535	3/8	4	390	10,000	right - left	165	1.20	0.170	92	1/4	6.87		95
785704	SW C540A	1/2	4	881	7,500	right - left	195	2.00	0.260	92	1/4	8.90		96
785600	SW C504	1/2	5	949	10,000	right - left	178	2.00	0.370	93	1/4	5.70		97
785650	SW C562	3/4	4	1,357	4,000	right - left	240	3.80	0.340	92	3/8	3.60		98
785875	SW C582	1	4	1,627	4,000	right - left	240	4.00	0.340	92	3/8	3.60		98
785680	SW C555	1/2	4	1,508	8,000	right - left	197	2.30	0.480	96	1/4	8.10		99
785690	SW C575	3/4	4	1,508	8,000	right - left	211	2.30	0.540	96	1/4	8.10		99
785661	SW 5830P	1	4	3,428	5,000	right - left	275	7.30	0.255	100	1/2	16.40		100
785660	SW 5830	1	4	3,428	5,000	right - left	347	7.40	0.255	104	1/2	14.50		101
785662	SW 5830-6	1	4	3,428	5,000	right - left	487	8.30	0.255	104	1/2	14.50		101
785870	SW C581	1	6	2,400	5,000	right - left	420	6.88	0.380	82	1/2	4.00		102
785880	SW C581-6	1	6	2,712	5,000	right - left	550	8.40	0.380	82	1/2	4.00	Extended spindle	102
785890	SW 5597	1 1/2		4,878	3,600	right - left	440	17.30	0.900	95	1/2	6.50		103
785860	SW 5567	3/4	4	813	6,300	right - left	217	3.00	0.340	94	1/4	8.64		104
785750	SW 55444	1/2	4	813	6,500	right - left	182	2.80	0.270	91	1/4	5.60		104
785730	SW 5245	1/2	2	244	7,000	right - left	341	1.80	0.400	97	1/4			105

RATCHET WRENCHES

ITEM NO.	ITEM NAME	SQUARE DRIVE (")	LEVEL SETTING	MAX. TORQUE (NM)	SPEED (1/MIN)	VOLUME DB(A)	LENGTH (MM)	WEIGHT (KG)	AIR CON-SUMPTION (M ³ /MIN)	CONNECTOR (")	VIBRATION (M/S ²)	PARTICULAR FEATURE	PAGE
789031	SW 55502 mini ratchet wrench	1/4		20	260	80	133	0.45	0.070	1/4	1.0		107
789030	SW 55503 mini ratchet wrench	3/8	4	20	260	80	130	0.45	0.070	1/4	1.0		108
789035	SW 55523 high-p. ratchet wrench	3/8		54	350	87	205	0.66	0.100	1/4	2.9	Enclosed head	109
789034	SW 55522 high-p. ratchet wrench	1/4		27	250	88	205	0.66	0.070	1/4	3.0	Enclosed head	109
789037	SW 55529 high-p. ratchet wrench	1/2		163	600	94	345	1.76	0.119	1/4	7.0	Enclosed head	110
789038	SW 55548 high-p. ratchet wrench	1/2		136	225	95	307	1.24	0.113	1/4	5.7	Enclosed head	111
789002	SW 3002 high-p. ratchet wrench	1/2	4	82	180	94	276	1.20	0.120	1/4	1.9	Enclosed head	112
789003	SW 3003 ratchet wrench	3/8	4	82	180	94	276	1.20	0.113	1/4	1.4	Enclosed head	112
789105	SW 5554 ratchet wrench	1/2		122	150	80	365	2.00	0.142	1/4	2.5		113

Drilling tools

ITEM NO.	ITEM NAME	DRILL CHUCK (MM)	DRILL CHUCK TYPE	FORM	MAX. TORQUE (NM)	SPEED (r/MIN)	LEN-GTH (MM)	WEIGHT (KG)	AIR CON-SUMP-TION (M ³ /MIN)	VOLUME (DB(A))	DIS-CHARGE AIR	CONNECTOR	VIBRA-TION (M/S ²)	PARTICULAR FEATURE	PAGE
786460	SW CDD26	6	Keyed chuck	Pistol	3,5	2,900	140	0,58	0,280	72	Rotatable	1/4	0,4	Composite housing	117
786465	SW CDD39	10	Keyless chuck	Pistol	5	1,600	140	0,58	0,280	72	Rotatable	1/4	0,9	Composite housing	118
786470	SW CDD48	10	Keyless chuck	Pistol	7	1,700	160	0,92	0,550	76	Rotatable	1/4	0,4	Composite housing	119
786480	SW CDD58	10	Keyless chuck	Pistol	13	750	159	0,92	0,550	76	Rotatable	1/4	0,1	Composite housing	120
786475	SW CDD458	13	Keyless chuck	Pistol	13	750	159	0,92	0,550	76	Rotatable	1/4	0,1	Composite housing	121
786300	SW 312K	10	Keyless chuck	Pistol		2,500	190	0,95	0,480	-	Bottom	1/4	-		122
786600	SW 314F	13	Keyed chuck	Pistol		750	235	1,95	0,480	-	Bottom	1/4	-		123
786650	SW 314K	13	Keyless chuck	Pistol		750	235	1,95	0,480	-	Bottom	1/4	-		124
786431	SW 4431	10	Keyed chuck	Pistol		1,800	180	0,90	0,170	92	Bottom	1/4	0,2		125
786432	SW 4431C	10	Keyless chuck	Pistol		1,800	180	0,90	0,170	92	Bottom	1/4	0,2		126
786441	SW 4441	13	Keyed chuck	Pistol		800	180	0,90	0,170	88	Bottom	1/4	0,2		127
786450	SW 4443A	13	Keyed chuck	Pistol		400	180	1,80	0,170	76	Bottom	1/4	0,3	High-performance	128
786438	SW 4438	10	Keyed chuck	Straight		2,600	203	0,90	0,170	92	Rear	1/4	0,6		130
786439	SW 4439	10	Keyed chuck	Straight		4,500	190	0,90	0,170	85	Rear	1/4	0,6		131
786435	SW 4439C	10	Keyless chuck	Straight		3,600	225	0,85	0,090	91	Rear	1/4	0,3		132
786436	SW 4436	10	Keyed chuck	Angle		1,800	180	1,80	0,170	92	Rear	1/4	0,7		133

Percussive tools

ITEM NO.	ITEM NAME	FORM	SHAFT	IMPACTS (1/MIN)	NEEDLE DIMEN SIONS (MM/ QTY)	PISTON (MM)	PISTON STROKE LENGTH (MM)	WEIGHT (KG)	AIR CONSUMPTION (M ³ /MIN)	CONNECTOR (")	PAGE
789320	SW 2552 pistol-type chipper	Pistol	Square	2,700		23.5 x 20 x 73	295	2.60	0.285	1/4	137
789310	SW 2557F flux chipper	Straight	Square	5,000		25 x 50.5 x 50.5	320	1.60	0.285	1/4	138
789300	SW 2558F flux chipper	Straight	Circular	4,800		18 x 14 x 47	235	1.10	0.085	1/4	138
789312	SW 2200AH flux chipper	Pistol	Hex	3,000		20 x 45	243	2.60	0.400	1/4	139
789311	SW 2202H flux chipper	Pistol	Hex	2,400		28.5 x 51	327	5.90	0.600	3/8	139
789142	SW 2275 needle scaler	Straight		4,000	Ø 3 x 180 / 19	25 x 22	410	2.50	0.250	1/4	141
789230	SW 2558 needle scaler	Straight		5,500	Ø 3 x 125 / 12	18 x 14 x 47	290	1.30	0.085	1/4	142
789220	SW 2555 needle scaler	Pistol		3,700	Ø 3 x 180 / 19	23.5 x 20 x 73	330	2.70	0.285	1/4	143
789210	SW 2561 needle scaler	Pistol		4,000	Ø 3 x 180 / 23	24 x 22 x 56	335	2.80	0.285	3/8	144

Files & saws

ITEM NO.	ITEM NAME	MATERIAL THICKNESS (METALL) (MM)	STROKES/STROKE LENGTH (1/MIN) (MM)	VIBRATION (M/S ²)	LENGTH (MM)	WEIGHT (KG)	AIR CON-SUMP-TION (M ³ /MIN)	VOLUME (DB(A))	DIS-CHARGE AIR	CONNECTOR FEATURE	PARTICULAR FEATURE	PAGE
789182	SW 1183 file	-	35,000 1 - 2	-	170	0.240	0.220	-	Rear	1/4	Variable file adapter	149
789170	SW 66012 file	-	12,000 3 - 5	< 4.0	250	0.600	0.170	82	Rear	1/4	Incl. 4 file blades	150
789175	SW 66013 file	-	10,000 7 - 10	< 4.0	250	0.750	0.170	79	Rear	1/4	Incl. 4 file blades	151
789602	SW 66002 saw	3	9,500 10	1.8	238	0.720	0.170	83	Rear	1/4	Incl. saw blades W18+W24+W32	152
789612	SW 6612 saw	3	10,000 10	6.9	235	0.625	0.184	83	Rear	1/4	Incl. saw blades W24+W32	153
789660	SW 6600 saw & file	-	5,000 10	2.6	-	1.350	0.240	74	Rear	1/4	-	153

Other tools

ITEM NO.	ITEM NAME	CUTTING PER-FORMANCE (MM)	RIVET SIZES	NO. OF CLAMP JAWS	STROKE FREQUENCY (1/MIN)	STROKE LENGTH (MM)	STROKE VIBRATION (M/S ²)	LEN-GTH (MM)	WEIGHT (KG)	AIR CON-SUMP-TION (M ³ /MIN)	VOLUME CON-NECTOR (°)	POWER (KGS)	PAGE
783100	SW G400 engraving pen	-	-	-	21000	-	1.0	140	0.15	0.03	78	1/4	156
783150	SW G500 engraving pen	-	-	-	-	-	0.5	160	0.20	0.16	77	1/4	156
789630	SW 6625 nibbler	steel: 1.7, aluminium: 1.4	-	-	-	-	3.8	120	0.95	0.17	85	1/4	157
789450	SW 66715 nipper	copper: 4.8, steel: 4, plastic: 6.5	-	-	-	-	< 2.5	300	0.90	-	84	450 kg/cm ²	158
789620	SW 6620 plate shear	steel: 1.6, aluminium: 2.5	-	-	2200	-	1.5	260	1.10	0.17	84	-	159
7891526	SW 618-V vacuum riveting gun	-	3/32" (2.4 mm) / 1/8" (3.2 mm) / 5/32" (4 mm) / 3/16" (4.8 mm)	2	-	18	< 2.5	285	3.30	-	81	1/4	160
789152	SW 66152 riveting gun	-	3/32" (2.4 mm) / 1/8" (3.2 mm)	2	-	14	1.5	235	0.95	-	78	1/4	160
789157	SW 6675V vacuum riveting gun	-	2.4 mm / 3.2 mm / 4.0 mm / 4.8 mm	-	-	16	< 2.5	287	1.80	-	79	1/4	161
789154	SW 6677V vacuum riveting gun	-	3.2 mm / 4.0 mm / 4.8 mm / 6.4 mm	-	-	23	< 2.5	317	1.70	-	71	1/4	161

Avoid problems with static charging! Effective solutions by new swepro IONic series.

Antistatic bars - Antistatic nozzles - Antistatic pistols & fans

- ▶ Increase production efficiency
- ▶ Decrease cycle times
- ▶ Avoid faulty production
- ▶ Quality improvement process
- ▶ Avoid damage
- ▶ Increased operating safety
- ▶ Expert advice from our team

TEST PRODUCTS NOW AND WITHOUT OBLIGATION:

📞 +44 (0) 121 393 3500



www.swepro.com

Our expertise at a glance:

- ▶ **Advice from our technical support team**
- ▶ **Product testing with no obligation**
- ▶ **Short lead times**
- ▶ **Speedy integration into the production process**
- ▶ **Custom manufacturing**
- ▶ **Comprehensive product range**



Headquarter Swedex GmbH Industrial Products

Im Taubental 10 - D 41468 Neuss
Tel: +49 (0) 2131 7522 100
Fax: +49 (0) 2131 7522 210
Email: info@swepro.de
www.swepro.com

Location UK swepro Ltd.

One Victoria Square 623. Campus 03 -
B1 1BD (UK)
Tel. +44 (0) 121 393 3500
Fax +44 (0) 121 393 3510
Email: info@swepro.uk